
**Information technology —
Telecommunications and information
exchange between systems — Near
field communication interface and
protocol 2 (NFCIP-2)**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Interface et protocole 2 en
communication de champ proche (NFCIP-2)*

IECNORM.COM : Click to view the full PDF of ISO/IEC 21481:2021



IECNORM.COM : Click to view the full PDF of ISO/IEC 21481:2021



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier; Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	2
5 Conventions and notations	2
6 NFCIP-2 device	2
7 External RF field detection	3
8 RF field generation	3
9 Mode selection and switching	3
Bibliography	5

IECNORM.COM : Click to view the full PDF of ISO/IEC 21481:2021

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives or www.iec.ch/members_experts/refdocs).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html. In the IEC, see www.iec.ch/understanding-standards.

This document was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

This third edition cancels and replaces the second edition (ISO/IEC 21481:2012), which has been technically revised.

The main change compared to the previous edition is the improvement of the specification of the mode selection and switching mechanism.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html and www.iec.ch/national-committees.

Introduction

In 2002, Ecma International formed Task Group 19 of Technical Committee 32 to specify near field communication (NFC) signal interfaces and protocols. The NFC devices are wireless, closely-coupled devices communicating at 13,56 MHz.

Although ISO/IEC 18092 (NFCIP-1), ISO/IEC 14443 and ISO/IEC 15693 all specify 13,56 MHz as their working frequency, they specify distinct communication modes. These are defined as NFC, PCD, PICC and VCD communication modes.

This document (NFCIP-2) specifies the mechanism to detect an external RF field and select one communication mode out of those four possible communication modes. Furthermore, NFCIP-2 requires that subsequent behaviour be as specified in the standard specifying the selected communication mode.

In 2018, the work to revise this document started to improve mode selection and switching to address latest use cases. Furthermore, harmonization with NFC Forum requirement specification is intended.

IECNORM.COM : Click to view the full PDF of ISO/IEC 21481:2021

[IECNORM.COM](https://www.iecnorm.com) : Click to view the full PDF of ISO/IEC 21481:2021

Information technology — Telecommunications and information exchange between systems — Near field communication interface and protocol 2 (NFCIP-2)

1 Scope

This document specifies the communication mode selection and switching mechanism, designed not to disturb any ongoing communication at 13,56 MHz, for devices implementing ISO/IEC 18092, the ISO/IEC 14443 or ISO/IEC 15693 series. The communication modes are specified in the respective International Standards and are outside of the scope of this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 14443-2, *Cards and security devices for personal identification — Contactless proximity objects — Part 2: Radio frequency power and signal interface*

ISO/IEC 14443-3, *Cards and security devices for personal identification — Contactless proximity objects — Part 3: Initialization and anticollision*

ISO/IEC 14443-4, *Cards and security devices for personal identification — Contactless proximity objects — Part 4: Transmission protocol*

ISO/IEC 15693-2, *Cards and security devices for personal identification — Contactless vicinity objects — Part 2: Air interface and initialization*

ISO/IEC 15693-3, *Cards and security devices for personal identification — Contactless vicinity objects — Part 3: Anticollision and transmission protocol*

ISO/IEC 18092, *Information technology — Telecommunications and information exchange between systems — Near Field Communication — Interface and Protocol (NFCIP-1)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

fc

carrier frequency

frequency of operating field

Note 1 to entry: *fc* shall be 13,56 MHz ± 7 kHz as specified in ISO/IEC 14443-2, ISO/IEC 15693-2 and ISO/IEC 18092.

Note 2 to entry: 13,56 MHz ± 7 kHz is a frequency band allocated in Reference [2] for ISM applications.

3.2

$H_{\text{THRESHOLD}}$

threshold value to detect an external RF field

[SOURCE: ISO/IEC 18092:2013, 4.6.]

3.3

NFC mode

mode in which an NFCIP-2 device operates as an NFCIP-1 device

Note 1 to entry: NFC mode shall be compliant with the mandatory NFCIP-1 device requirements of ISO/IEC 18092.

3.4

PCD mode

mode in which an NFCIP-2 device operates as a PCD

Note 1 to entry: PCD mode shall be compliant with the mandatory PCD requirements of ISO/IEC 14443-2, ISO/IEC 14443-3 and ISO/IEC 14443-4.

3.5

PICC mode

mode in which an NFCIP-2 device operates as a PICC

Note 1 to entry: PICC mode shall be compliant with the mandatory PICC requirements of ISO/IEC 14443-2, ISO/IEC 14443-3 and ISO/IEC 14443-4.

3.6

VCD mode

mode in which an NFCIP-2 device operates as a VCD

Note 1 to entry: VCD mode shall be compliant with the mandatory VCD requirements of ISO/IEC 15693-2 and ISO/IEC 15693-3.

4 Abbreviated terms

ISM	industrial, scientific and medical
NFC	near field communication
PCD	proximity coupling device
PICC	proximity integrated circuit card
RF	radio frequency
VCD	vicinity coupling device

5 Conventions and notations

The names of basic elements, e.g. specific fields, are written with a capital initial letter.

6 NFCIP-2 device

A conforming NFCIP-2 device shall implement the external RF field detection specified in [Clause 7](#), the RF field generation specified in [Clause 8](#), and the mode selection and switching specified in [Clause 9](#).

The NFCIP-2 device shall implement NFC mode, PICC mode, PCD mode and VCD mode.

7 External RF field detection

During external RF field detection, an NFCIP-2 device shall, for a period of $T_{IDT} + n \times T_{RFW}$, detect external RF fields at f_c with a value higher than $H_{THRESHOLD}$ and shall not generate an RF field. T_{IDT} , T_{RFW} , n and $H_{THRESHOLD}$ are specified in ISO/IEC 18092.

8 RF field generation

The NFCIP-2 device may only generate its RF field if it does not detect an external RF field as specified in [Clause 7](#).

[Figure 1](#) illustrates the RF field generation including the external RF field detection.

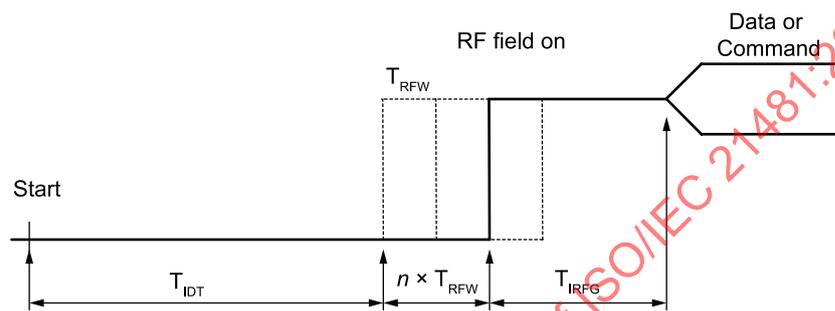


Figure 1 — External RF field detection and RF field generation

9 Mode selection and switching

This clause specifies the procedure, which is comprised of mode selection and the sequence for mode switching, for NFCIP-2 devices to switch to the NFC mode, the PCD mode, the PICC mode or the VCD mode.

Initially the NFCIP-2 device shall not generate its RF field prior to the procedure.

The mode is selected prior to the execution of the following sequence.

When repeating the procedure, the NFCIP-2 device may stop generating its RF field to change the communication modes.

The NFCIP-2 device shall execute the following sequence:

- a) If the PICC mode has been selected, the NFCIP-2 device shall not generate its RF field and shall switch to the PICC mode.
- b) If the NFC mode has been selected, the NFCIP-2 device shall switch to the NFC mode.
- c) If the PCD mode has been selected, and if the NFCIP-2 device
 - 1) generates its RF field, it shall switch to the PCD mode;
 - 2) does not generate its RF field, it shall perform external RF field detection as specified in [Clause 7](#). If no external RF field is detected, the NFCIP-2 device shall generate an RF field as specified in [Clause 8](#) and switch to the PCD mode. Otherwise, the NFCIP-2 device shall recommence the procedure.
- d) If the VCD mode has been selected, and if the NFCIP-2 device
 - 1) generates its RF field, it shall switch to the VCD mode;