


Edition 4.1 2024-06 **CONSOLIDATED VERSION** 

# **INTERNATIONAL STANDARD**

60317-1-2010+AMD1-202A CSV res-

Specifications for particular types of winding wires -

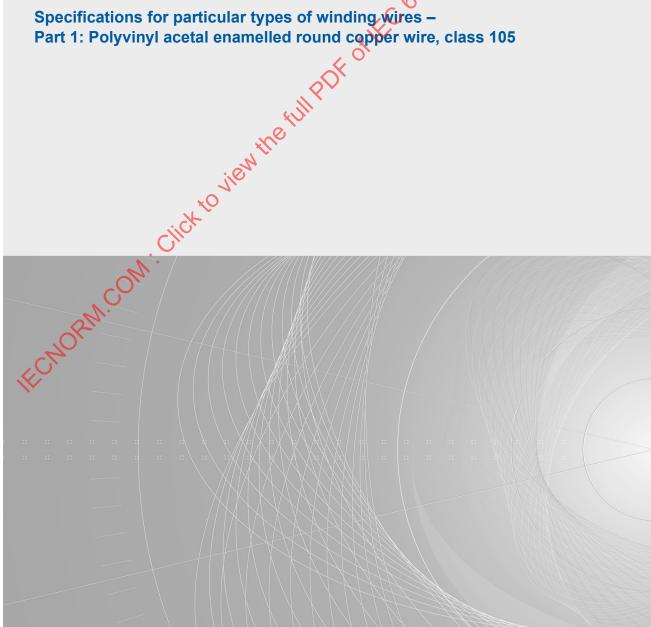



# THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2024 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

**IEC Secretariat** 3, rue de Varembé CH-1211 Geneva 20 Switzerland

Tel.: +41 22 919 02 11

info@iec.ch www.iec.ch

#### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

#### IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

#### IEC Customer Service Centre - webstore.iec.ch/csc

LECNORIA. Click to view the toll of the to If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service

#### IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

# Electropedia www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.



Edition 4.1 2024-06 **CONSOLIDATED VERSION** 

# INTERNATIONAL **STANDARD**

60317-1-2010+AMD1-202A CSV res

Specifications for particular types of winding wires and c and c and c circle to view the full PDF Part 1: Polyvinyl acetal enamelled round copper wire, class 105

INTERNATIONAL **ELECTROTECHNICAL** COMMISSION

ICS 29.060.10 ISBN 978-2-8322-9231-0

Warning! Make sure that you obtained this publication from an authorized distributor.

# CONTENTS

FΟ	REWO	DRD	3				
INT	RODU	JCTION	5				
1	Scop	e	6				
2	Norm	Normative references					
3	Terms, definitions and general notes on methods of test and appearance						
	3.1	Terms and definitions	6				
	3.2	General notes on methods of test	7				
		3.2.1 Methods of test  3.2.2 Winding wire  Appearance ensions crical resistance gation nginess bility and adherence	7				
		3.2.2 Winding wire	7				
	3.3	Appearance	7				
4	Dime	ensions	7				
5	Elect	rical resistancexY	7				
6	Elong	gation	7				
7	Sprin	nginess	7				
8	Flexi	bility and adherence	7				
9	Heat	shockshock	7				
	9.1	Nominal conductor diameters up to and including ,600 mm					
	9.2	Nominal conductor diameters over 1,600 mm.					
10	Cut-t	hrough	8				
11	Resis	stance to abrasion (nominal conductor diameters from 0,250 mm up to and ding 2,500 mm) stance to solventskdown voltageinuity of insulation	8				
12	Resis	stance to solvents	9				
13	Breal	kdown voltage	9				
14	Conti	inuity of insulation	9				
15	Temp	perature indexstance to refrigerants.	9				
16	Resis	stance to refrigerants	10				
17	Solde	erability	10				
		and solvent bonding					
		ectric dissipation factor	10				
		stance to transformer oil	10				
		of mass					
		ole test					
		aging					
	Zack	49mg	10				
<b>V</b> OL	) No 1	- Heat shock	0				
		- Resistance to abrasion	o 9				
101	,,c, / -	Dealarance IV AVIABIUI					

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

#### SPECIFICATIONS FOR PARTICULAR TYPES OF WINDING WIRES -

# Part 1: Polyvinyl acetal enamelled round copper wire, class 105

#### **FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter reterred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 60317-1 edition 4.1 contains the fourth edition (2010-03) [documents 55/1176/FDIS and 55/1187/RVD] and its amendment 1 (2024-06) [documents 55/1979/CDV and 55/2015/RVC].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 60317-1 has been prepared by IEC technical committee 55: Winding wires.

This fourth edition of IEC 60317-1 cancels and replaces the third edition published in 1990, its Amendment 1 (1997) and Amendment 2 (1997). This edition constitutes a technical revision.

The main changes with respect to the previous edition are as follows:

- new requirements for appearance;
- deletion of high temperature failure requirements;
- new pin hole test requirements.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This International Standard is to be read in conjunction with IEC 60317-0-1 (2008):2013 and its Amendment 1:2019.

A list of all the parts in the IEC 60317 series, under the general title **Specifications** for particular types of winding wires, can be found on the IEC website.

The committee has decided that the contents of this document and its amendment will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

#### INTRODUCTION

This Part of IEC 60317 is one of a series which deals with insulated wires used for windings in electrical equipment. The series has three groups describing

- 1) winding wires and methods of test (IEC 60851);

ECHORAN.COM. Click to view the full POF of IEC 60317. 1.2010 r. Auto Vie

#### SPECIFICATIONS FOR PARTICULAR TYPES OF WINDING WIRES -

#### Part 1: Polyvinyl acetal enamelled round copper wire, class 105

#### 1 Scope

This Part of IEC 60317 specifies the general requirements of enamelled round copper winding wires of class 105 with a sole coating based on polyvinyl acetal resin, which may be modified providing it retains the chemical identity of the original resin and meets all specified wire requirements.

NOTE A modified resin is a resin that has undergone a chemical change, or contains one or more additives to enhance certain performance or application characteristics.

Class 105 is a thermal class that requires a minimum temperature index of 105 and a heat shock temperature of at least 155 °C.

The temperature in degrees Celsius corresponding to the temperature index is not necessarily that at which it is recommended that the wire be operated and this will depend on many factors, including the type of equipment involved.

The range of nominal conductor diameters covered by this standard is as follows:

- Grade 1: 0,040 mm up to and including 2,500 mm;
- Grade 2: 0,040 mm up to and including 5,000 mm;
- Grade 3: 0,080 mm up to and including 5,000 mm.

The nominal conductor diameters are specified in Clause 4 of IEC 60317-0-1.

### 2 Normative references

The following referenced documents are indispensable for the application referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60317-0=11.20082013, Specifications for particular types of winding wires – Part 0-1: General requirements – Enamelled round copper wire.
IEC 60317-0-1:2013/AMD1:2019

## 3 Terms, definitions and general notes on methods of test and appearance

#### 3.1 Terms and definitions

For terms and definitions, see 3.1 of IEC 60317-0-1. In case of inconsistencies between IEC 60317-0-1 and this standard, IEC 60317-1 shall prevail.

<sup>&</sup>lt;sup>1</sup> There exists a consolidated edition 4.1:2021 that includes IEC 60317-0-1:2013 and its Amendment 1:2019.

#### 3.2 General notes on methods of test

#### 3.2.1 **Methods of test**

For general notes on methods of test, see 3.2 of IEC 60317-0-1.

Subclause 3.2.1 of IEC 60317-0-1:2013 and IEC 60317-0-1:2013/AMD1:2019 applies.

In case of inconsistencies between IEC 60317-0-1 and this standard, IEC 60317-1 shall prevail.

#### 3.2.2 Winding wire

Subclause 3.2.2 of IEC 60317-0-1:2013 applies.

#### 3.3 **Appearance**

See 3.3 of IEC 60317-0-1.

#### **Dimensions**

See Clause 4 of IEC 60317-0-1.

#### 5 **Electrical resistance**

See Clause 5 of IEC 60317-0-1.

Clause 5 of IEC 60317-0-1:2013 and IEC 60317-0-1:2013/AMD1:2019 applies.

See Clause 6 of IEC 60317-0-16

#### **Springiness**

See Clause 7 of IEC 60317-0-1.

### Flexibility and adherence

See Clause 8 of IEC 60317-0-1, where the constant K used for the calculation of the number of revolutions for the peel test shall be 175 mm.

### **Heat shock**

The minimum heat shock temperature shall be 155 °C.

#### 9.1 Nominal conductor diameters up to and including 1,600 mm

The coating shall show no crack. The mandrel diameter shall be as specified in Table 1.

Table 1 - Heat shock

	uctor diameter m	Elongation before winding	Mandrel diameter <sup>b</sup>	
Over	Up to and including	on mandrel %		
_	0,050	20 <sup>a</sup>	0,150 mm	
0,050	1,600	_	D	

Or to the breaking point of the copper, whichever is less.

#### Nominal conductor diameters over 1,600 mm

See 9.2 of IEC 60317-0-1.

### 10 Cut-through

No failure shall occur within 2 min at 170 °C.

11 Resistance to abrasion (nominal conductor diameters from 0,250 mm up to The wire shall meet the requirements given in Table 2. and including 2,500 mm)

D is the overall diameter of the wire.

Table 2 - Resistance to abrasion

	Grade 1		Grade 2		Grade 3	
Nominal conductor diameter mm	Minimum average force to failure	Minimum force to failure of each measurement	Minimum average force to failure	Minimum force to failure of each measurement	Minimum average force to failure	Minimum force to failure of each measurement
	N	N	N	N	N	N
0,250	3,00	2,55	4,90	4,15	5,80	4,90
0,280	3,25	2,75	5,25	4,45	6,25	5,30
0,315	3,50	2,95	5,65	4,80	6,70	5,70
0,355	3,75	3,20	6,05	5,15	7,20	6,10
0,400	4,05	3,45	6,50	5,50	7,70	6,50
0,450	4,35	3,70	7,00	5,90	8,25	7,00
0,500	4,65	3,95	7,50	6,35	8,85	7,50
0,560	5,00	4,25	8,00	6,80	9,5	8,05
0,630	5,35	4,55	8,60	7,30	10,2	8,65
0,710	5,70	4,85	9,20	7,80	10,9	9,25
0,800	6,10	5,15	9,90	8,40	11,7	9,9
0,900	6,55	5,55	10,6	9,00	12,5	10,6
1,000	7,05	5,95	11,3	9,60	13,3	11,3
1,120	7,60	6,45	12,1	10,2	14,2	12,0
1,250	8,20	6,95	12,9	11,0	15,2	12,9
1,400	8,80	7,45	13,9	11,8	16,4	13,9
1,600	9,45	8,00	14,9	12,6	17,6	14,9
1,800	10,1	8,60	16,0	13,5	18,8	16,0
2,000	10,9	9,20	17,1	14,4	20,2	17,1
2,240	11,7	9,90	18,2	15,4	21,6	18,3
2,500	12,5	10,6	19,4	16,4	23,0	19,5

For intermediate nominal conductor diameters, the value of the next larger nominal conductor diameter shall be taken.

# 12 Resistance to solvents

See Clause 12 of IEC 60317-0-1.

#### 13) Breakdown voltage

See Clause 13 of IEC 60317-0-1, where the elevated temperature shall be 105 °C.

### 14 Continuity of insulation

See Clause 14 of IEC 60317-0-1.

#### 15 Temperature index

See Clause 15 of IEC 60317-0-1, where the minimum temperature index shall be 105.

### 16 Resistance to refrigerants

Test appropriate but no requirements are specified.

Test inappropriate.

See Clause 30 of IEC 60317-0-1.

ECHORN.COM. click to view the full PDF of the GOSTA. 2010 r. Auto Trick to view the full PDF of the GOSTA.

# CONTENTS

FΟ	REWORD	3				
INT	FRODUCTION	5				
1	Scope	6				
2 Normative references						
3	Terms, definitions and general notes on methods of test and appearance					
	3.1 Terms and definitions					
	3.2 General notes	<u>.</u> 7				
	3.2.1 Methods of test	7				
	3.2.2 Winding wire	7				
	3.3 Appearance	7 _				
4	Dimensions	7				
5	Electrical resistance	7				
6	Elongation	7				
7	3.2 General notes  3.2.1 Methods of test  3.2.2 Winding wire  3.3 Appearance  Dimensions  Electrical resistance  Elongation  Springiness  Flexibility and adherence	7				
8	Flexibility and adherence	7				
9						
	9.1 Nominal conductor diameters up to and including 600 mm					
	9.2 Nominal conductor diameters over 1,600 mm					
10	Cut-through	8				
11	Resistance to abrasion (nominal conductor diameters from 0,250 mm up to and including 2,500 mm)  Resistance to solvents  Breakdown voltage  Continuity of insulation	8				
12	Resistance to solvents	9				
13	Breakdown voltage	9				
14	Continuity of insulation	9				
15	Temperature index	9				
16						
17	Solderability	10				
18	Heat and solvent bonding	10				
19	Dielectric dissipation factor	10				
20	Resistance to transformer oil	10				
21	Loss of mass	10				
23	Pin hole test	10				
30	Packaging	10				
C						
Tab	ble 1 – Heat shock	8				
	ble 2 – Resistance to abrasion					

#### INTERNATIONAL ELECTROTECHNICAL COMMISSION

#### SPECIFICATIONS FOR PARTICULAR TYPES OF WINDING WIRES -

# Part 1: Polyvinyl acetal enamelled round copper wire, class 105

#### **FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter reterred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 60317-1 edition 4.1 contains the fourth edition (2010-03) [documents 55/1176/FDIS and 55/1187/RVD] and its amendment 1 (2024-06) [documents 55/1979/CDV and 55/2015/RVC].

This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.

International Standard IEC 60317-1 has been prepared by IEC technical committee 55: Winding wires.

This fourth edition of IEC 60317-1 cancels and replaces the third edition published in 1990, its Amendment 1 (1997) and Amendment 2 (1997). This edition constitutes a technical revision.

The main changes with respect to the previous edition are as follows:

- new requirements for appearance;
- deletion of high temperature failure requirements;
- new pin hole test requirements.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This International Standard is to be read in conjunction with IEC 60317-0-1:2013 and its Amendment 1:2019.

A list of all the parts in the IEC 60317 series, under the general title Specifications for particular types of winding wires, can be found on the IEC website.

The committee has decided that the contents of this document and its amendment will remain at absit .ocumen
.ocumen
.ocumen
.ocimen the full puth of life of the color of the unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

#### INTRODUCTION

This Part of IEC 60317 is one of a series which deals with insulated wires used for windings in electrical equipment. The series has three groups describing

- 1) winding wires and methods of test (IEC 60851);

ECHORAN.COM. Click to view the full POF of IEC 60317. 1.2010 r. Auto Vie

#### SPECIFICATIONS FOR PARTICULAR TYPES OF WINDING WIRES -

### Part 1: Polyvinyl acetal enamelled round copper wire, class 105

#### 1 Scope

This Part of IEC 60317 specifies the general requirements of enamelled round copper winding wires of class 105 with a sole coating based on polyvinyl acetal resin, which may be modified providing it retains the chemical identity of the original resin and meets all specified wire requirements.

NOTE A modified resin is a resin that has undergone a chemical change, or contains one or more additives to enhance certain performance or application characteristics.

Class 105 is a thermal class that requires a minimum temperature index of 105 and a heat shock temperature of at least 155 °C.

The temperature in degrees Celsius corresponding to the temperature index is not necessarily that at which it is recommended that the wire be operated and this will depend on many factors, including the type of equipment involved.

The range of nominal conductor diameters covered by this standard is as follows:

- Grade 1: 0,040 mm up to and including 2,500 mm;
- Grade 2: 0,040 mm up to and including 5,000 mm;
- Grade 3: 0,080 mm up to and including 5,000 mm.

The nominal conductor diameters are specified in Clause 4 of IEC 60317-0-1.

#### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60317-0-1-2013, Specifications for particular types of winding wires – Part 0-1: General requirements – Enamelled round copper wire. IEC 60317-0-1:2013/AMD1:2019

## 3 Terms, definitions and general notes on methods of test and appearance

#### 3.1 Terms and definitions

For terms and definitions, see 3.1 of IEC 60317-0-1. In case of inconsistencies between IEC 60317-0-1 and this standard, IEC 60317-1 shall prevail.

<sup>&</sup>lt;sup>1</sup> There exists a consolidated edition 4.1:2021 that includes IEC 60317-0-1:2013 and its Amendment 1:2019.

3.2 **General notes** 

#### 3.2.1 **Methods of test**

Subclause 3.2.1 of IEC 60317-0-1:2013 and IEC 60317-0-1:2013/AMD1:2019 applies.

In case of inconsistencies between IEC 60317-0-1 and this standard, IEC 60317-1 shall 30317.1.2010\*AMD1.2024°CSV prevail.

#### 3.2.2 Winding wire

Subclause 3.2.2 of IEC 60317-0-1:2013 applies.

#### 3.3 **Appearance**

See 3.3 of IEC 60317-0-1.

#### **Dimensions**

See Clause 4 of IEC 60317-0-1.

#### **Electrical resistance**

Clause 5 of IEC 60317-0-1:2013 and IEC 60317-0-1:2013/AMD1:2019 applies. EN the full PDF of

### **Elongation**

See Clause 6 of IEC 60317-0-1.

#### **Springiness**

See Clause 7 of IEC 60317-0-

### Flexibility and adherence

See Clause 8 of NEC 60317-0-1, where the constant K used for the calculation of the number of revolutions for the peel test shall be 175 mm.

# **Heat shock**

The minimum heat shock temperature shall be 155 °C.

#### Nominal conductor diameters up to and including 1,600 mm

The coating shall show no crack. The mandrel diameter shall be as specified in Table 1.