

# INTERNATIONAL STANDARD



**Multimedia gateway in home networks – Guidelines**

IECNORM.COM : Click to view the full PDF of IEC 62514:2010



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)  
Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00

# INTERNATIONAL STANDARD



**Multimedia gateway in home networks – Guidelines**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE **XA**

ICS 33.160.60; 35.110; 35.200

ISBN 978-2-88910-946-3

## CONTENTS

|   |    |
|---|----|
| FOREWORD.....                                       | 5  |
| INTRODUCTION.....                                   | 7  |
| 1 Scope.....  | 8  |
| 2 Normative references .....                        | 8  |
| 3 Terms, definitions and abbreviations .....        | 9  |
| 3.1 Terms and definitions .....                     | 9  |
| 3.2 Abbreviations .....                             | 10 |
| 4 HMG architecture .....                            | 12 |
| 4.1 Architecture of a home multimedia network ..... | 12 |
| 4.2 HMG architecture .....                          | 13 |
| 4.2.1 General .....                                 | 13 |
| 4.2.2 AV processing .....                           | 13 |
| 4.2.3 Home automation .....                         | 13 |
| 4.2.4 QoS.....                                      | 13 |
| 4.2.5 Security .....                                | 14 |
| 4.2.6 Interconnection.....                          | 14 |
| 4.2.7 Interfaces and access.....                    | 14 |
| 5 Interconnection requirements .....                | 14 |
| 5.1 General connection requirements .....           | 14 |
| 5.2 Address assignment and resolution .....         | 15 |
| 5.2.1 Address assignment .....                      | 15 |
| 5.2.2 Address resolution.....                       | 15 |
| 5.3 Data transfer .....                             | 15 |
| 5.4 Protocol translation .....                      | 16 |
| 6 AV processing requirements.....                   | 16 |
| 6.1 General.....                                    | 16 |
| 6.2 Multimedia transformation service .....         | 16 |
| 6.2.1 Requirements summary .....                    | 16 |
| 6.2.2 Applications mode .....                       | 16 |
| 6.3 Multimedia stream control service .....         | 22 |
| 6.3.1 Requirements summary .....                    | 22 |
| 6.3.2 Application mode .....                        | 22 |
| 6.3.3 Content directory service.....                | 30 |
| 6.4 Media format requirements .....                 | 32 |
| 7 Home automation requirements .....                | 33 |
| 7.1 Requirements summary.....                       | 33 |
| 7.2 Devices in directory.....                       | 33 |
| 7.2.1 Printer .....                                 | 33 |
| 7.2.2 Surveillance cameras .....                    | 33 |
| 7.2.3 Intelligent household appliance.....          | 34 |
| 7.3 Multimedia message application .....            | 34 |
| 7.3.1 Requirements summary for HMG .....            | 34 |
| 7.3.2 Multimedia message .....                      | 34 |
| 7.3.3 Requirements for multimedia message .....     | 34 |
| 7.3.4 Multimedia message format.....                | 35 |
| 7.3.5 Send a message.....                           | 36 |

|                       |  |    |
|-----------------------|--|----|
| 7.3.6                 | Delete a message.....  | 36 |
| 7.3.7                 | Requirements for HMG .....   | 36 |
| 7.4                   | Devices management by HMG .....  | 36 |
| 7.4.1                 | Device status.....   | 36 |
| 7.4.2                 | Connection status.....   | 36 |
| 7.4.3                 | Energy saving and power management .....   | 37 |
| 7.5                   | Meters reading .....   | 37 |
| 7.6                   | Household appliance control .....  | 38 |
| 8                     | QoS.....   | 38 |
| 8.1                   | General.....   | 38 |
| 8.2                   | QoS requirements for HMG .....   | 39 |
| 9                     | Security requirements.....   | 40 |
| 9.1                   | Requirements summary.....  | 40 |
| 9.2                   | DRM.....   | 40 |
| 9.3                   | Key management .....   | 41 |
| 9.4                   | Authentication .....   | 41 |
| 9.5                   | Credibility of HMG .....   | 42 |
| 10                    | Performance requirements .....   | 42 |
| 11                    | Requirements for interfaces and protocols of HMG .....   | 42 |
| 11.1                  | General.....   | 42 |
| 11.2                  | WAN side interfaces.....   | 43 |
| 11.3                  | LAN side interfaces .....  | 44 |
| Annex A (informative) | Application Scenario .....   | 45 |
| Bibliography.....     |  | 57 |
| Figure 1              | – Architecture for a home multimedia network.....  | 12 |
| Figure 2              | – HMG architecture .....   | 13 |
| Figure 3              | – Conversion of media streams.....   | 17 |
| Figure 4              | – HMRec requests media conversion from HMG .....   | 18 |
| Figure 5              | – HMRec requests WMS to support redirection .....  | 19 |
| Figure 6              | – HMSou actively sends media to HMRec .....  | 21 |
| Figure 7              | – Video clip .....   | 22 |
| Figure 8              | – AV media stream division.....  | 23 |
| Figure 9              | – Stream division process .....  | 23 |
| Figure 10             | – Combination of media streams .....   | 24 |
| Figure 11             | – Stream combination process .....   | 24 |
| Figure 12             | – Duplication of media streams .....   | 25 |
| Figure 13             | – HMRec1 duplicates media stream to HMRec2.....  | 26 |
| Figure 14             | – HMRec2 requests to join the multicast group of the program being played on HMRec1.....             | 26 |
| Figure 15             | – HMRec1 requests media stream from HMG and duplicates media stream to HMRec2.....                   | 27 |
| Figure 16             | – HMRec1 duplicates media stream to HMRec2 after requesting MS to redirect media stream to HMG ..... | 28 |
| Figure 17             | – Media stream redirection.....  | 29 |
| Figure 18             | – HMRec1 requests to redirect media stream to HMRec2.....  | 30 |

|   |    |
|---|----|
| Figure 19 – HMRec selects media contents through the directory service of HMG ..... | 31 |
| Figure 20 – QoS architecture overview .....   | 39 |
| Table 1 – Mandatory and Optional Media Formats .....                                | 32 |
| Table 2 – Multimedia Message Format Recommended .....                               | 35 |
| Table 3 – WAN Side Interfaces .....   | 43 |
| Table 4 – LAN Side Interfaces .....   | 44 |

IECNORM.COM : Click to view the full PDF of IEC 62514:2010

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**MULTIMEDIA GATEWAY IN HOME NETWORKS –  
GUIDELINES**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62514 has been prepared by technical area 9: Audio, video and multimedia applications for end-user network, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

The text of this standard is based on the following documents:

| FDIS          | Report on voting |
|---------------|------------------|
| 100/1672/FDIS | 100/1705/RVD     |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

IECNORM.COM : Click to view the full PDF of IEC 62514:2010



## INTRODUCTION

In a digital home, in order to meet the various requirements of digital living, all kinds of communication devices (computers, consumer-electrical products etc) are integrated into a home network. Such a network (comprising home information, entertainment, control services, etc.) thus forms a system of information exchange with outside networks.

A home network system is a Local Area Network (LAN) connecting such terminal devices as information devices, communication devices, entertainment devices, household appliances, meters of gas, water and electricity, health-care equipment, lighting and security systems, etc. to implement the network management and services and share the resources and services in the network.

The multimedia services and the management for devices mentioned above can be performed through a home multimedia gateway.

IECNORM.COM : Click to view the full PDF of IEC 62514:2010

## MULTIMEDIA GATEWAY IN HOME NETWORKS – GUIDELINES

### 1 Scope

This International Standard describes the general guidelines for typical applications of the home multimedia gateway in home networks supporting IP networking.

This standard specifies recommended functions and services to be supported by the home multimedia gateway and, where appropriate, refers to existing standards supported in the market. For general requirements, it is expected that widely adopted standards and technologies will be considered by implementers.

This standard gives supplementary application to IEC 62481, which specifies a central management model in home network supporting various interfaces in LAN side and WAN side (optional).

This standard is applicable to home multimedia gateways in the home network or networks of similar environment.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62481 (all parts), *Digital living network alliance (DLNA) home networked device interoperability guidelines*

IEC 62481-1:2007, *Digital living network alliance (DLNA) home networked device interoperability guidelines – Part 1: Architecture and protocols*

IEC 62481-2, *Digital living network alliance (DLNA) home networked device interoperability guidelines – Part 2: Media formats*

ISO/IEC 14762, *Information technology – Functional safety requirements for home and building electronic systems (HBES)*

ISO/IEC 29341 (all parts), *Information technology – UPnP Device Architecture*

ISO/IEC 29341-1, *Information technology – UPnP Device Architecture – Part 1: UPnP Device Architecture Version 1.0*

ISO/IEC 29341-3 (all Parts 3), *Information technology – UPnP Device Architecture – Part 3: Audio Visual Device Control Protocol*

ISO/IEC 15045-1, *Information technology – Home electronic system (HES) gateway – Part 1: A residential gateway model for HES*

ITU-T G.9960 /9961/G.hn *Next generation home networking transceivers*

UPnP Forum: *Quality of Service:3 (all parts)*, <http://www.upnp.org/specs/qos/qos3.asp>

RFC 2663, *IP Network Address Translator (NAT) Terminology and Considerations*

RFC 3022, *Traditional IP Network Address Translator (Traditional NAT)*

IEEE 802.16, *IEEE Standard for Local and metropolitan area networks Media Access Control (MAC) Bridges*

### 3 Terms, definitions and abbreviations

For the purposes of this document, the following terms, definitions and abbreviations apply.

#### 3.1 Terms and definitions

##### 3.1.1

##### **home multimedia network**

high speed network system to transport multimedia information within the home network

##### 3.1.2

##### **home multimedia gateway**

##### **HMG**

logical device in the home network, which provides such functions as multimedia processing and home automations, interconnection, QoS and security, etc; it can also connect LAN with outside networks (for example internet), implementing protocol translation and offer various network services

##### 3.1.3

##### **home control network**

network that transports control information in the home network

##### 3.1.4

##### **home control gateway**

provides protocol translation, device management, network management and control services in a home control network which can be combined with HMG in the form of a physical device

##### 3.1.5

##### **control point**

retrieves device and service descriptions, sends actions to services, polls for service state variables and receives events from Services

NOTE 'Service' is a term that is also defined in the ISO/IEC 29341 series.

##### 3.1.6

##### **terminal device**

devices in the home network that can be controlled and managed by HMG and control point

##### 3.1.7

##### **media receiver**

##### **MR**

device that receives media contents

NOTE It normally refers to the media content player.

##### 3.1.8

##### **home media receiver**

##### **HMRec**

device that receives media contents in the home network

NOTE HMRec should fully support the function of DMR and DMP which are DLNA device classes defined by IEC 62481-1.

### 3.1.9

#### **media source**

##### **MS**

device that owns media resources and sends media contents

### 3.1.10

#### **home media source**

##### **HMSou**

device that provides media contents in the home network; it can be a media server

NOTE HMSou should fully support the function of DMS and +PU+, which are defined by IEC 62481-1 and IEC 62481-2.

### 3.1.11

#### **WAN media source**

device that provides media contents in the Wide Area Network (WAN)

## 3.2 Abbreviations

|                  |                                       |
|------------------|---------------------------------------|
| +DN+             | Download Controller                   |
| +PR+             | Printing Controller                   |
| +PU+             | Push Uploader                         |
| +UP+             | Upload Controller                     |
| AAC              | Advanced Audio Coding                 |
| ADSL             | Asymmetric Digital Subscriber Line    |
| ANSI             | American National Standards Institute |
| ARP              | Address Resolution Protocol           |
| ATA              | Analog Telephone Adapter              |
| ATRAC            | Adaptive Transform Acoustic Coding    |
| AV               | Audio and Video                       |
| AVC              | Advanced Video Codec                  |
| CDS              | Content Distribution Service          |
| CPU              | Central Processing Unit               |
| DHCP             | Dynamic Host Configuration Protocol   |
| DLNA             | Digital Living Network Alliance       |
| DMC              | Digital Media Controller              |
| DMR              | Digital Media Renderer                |
| DMP              | Digital Media Player                  |
| DMP <sub>r</sub> | Digital Media Printer                 |
| DNS              | Domain Name System                    |
| DRM              | Digital Rights Management             |
| DSCP             | Differentiated Service Code Point     |
| DSL              | Digital Subscriber Line               |
| DTV              | Digital Television                    |
| EPG              | Electronic Program Guide              |
| ETH              | Ethernet                              |
| FTP              | File Transfer Protocol                |

|       |  |
|-------|--|
| GENA  | General Event Notification Architecture    |
| HMRec | Home Media Receiver                        |
| HMG   | Home Multimedia Gateway                    |
| HMSou | Home Media Source                          |
| HTTP  | Hyper Text Transfer Protocol               |
| ICMP  | Internet Control Message Protocol          |
| ID    | Identification                             |
| IGD   | Internet Gateway Device                    |
| IGMP  | Internet Group Management Protocol         |
| IP    | Internet Protocol                          |
| IPTV  | Internet Protocol Television               |
| ITU   | International Telecommunication Union      |
| JPEG  | Joint Photographic Experts Group           |
| LAN   | Local Area Network                         |
| LPCM  | Linear Pulse Code Modulation               |
| MAC   | Media Access Control                       |
| MIU   | Media Interoperability Unit                |
| MPEG  | Moving Picture Experts Group               |
| MR    | Media Receiver                             |
| MRCP  | MediaRenderer:1 Control Point              |
| MS    | Media Source                               |
| MSCP  | MediaServer:1 Control Point                |
| NAT   | Network Address Translation                |
| NAPT  | Port-Level NAT                             |
| NID   | Network Infrastructure Device              |
| PAN   | Personal Area Network                      |
| PC    | Personal Computer                          |
| QoS   | Quality of Service                         |
| RID   | Request Identity                           |
| RIP   | Routing Information Protocol               |
| SOAP  | Simple Object Access Protocol              |
| STB   | Set Top Box                                |
| TCP   | Transmission Control Protocol              |
| UDP   | User Datagram Protocol                     |
| UpnP  | Universal Plug and Play                    |
| URI   | Uniform Resource Identifier                |
| URL   | Uniform Resource Locator                   |
| VDSL  | Very-high-bit-rate Digital Subscriber Line |
| VOD   | Video on Demand                            |
| VOIP  | Voice over Internet Protocol               |
| WAN   | Wide Area Network                          |
| WMS   | WAN Media Source                           |
| WMM   | Wireless Multimedia                        |


## 4 HMG architecture

### 4.1 Architecture of a home multimedia network

A home multimedia network adopts a multiple levels network topology consisting of two network segments, i.e. a home multimedia network and a home control sub-network. The home control sub-network is optional, where appropriate.

The home multimedia network supports the central management mode which can be functioned by HMG, as well as supporting peer-to-peer mechanism as specified in the IEC 62481 series. The home multimedia network can access the outside network through an HMG while the home control sub-network can be connected to the home multimedia network through a home control sub-network gateway. The devices in a home control sub-network can intercommunicate and further access outside networks by sub-gateways and HMG.

The typical architecture of a home multimedia system is shown in Figure 1 as follows.

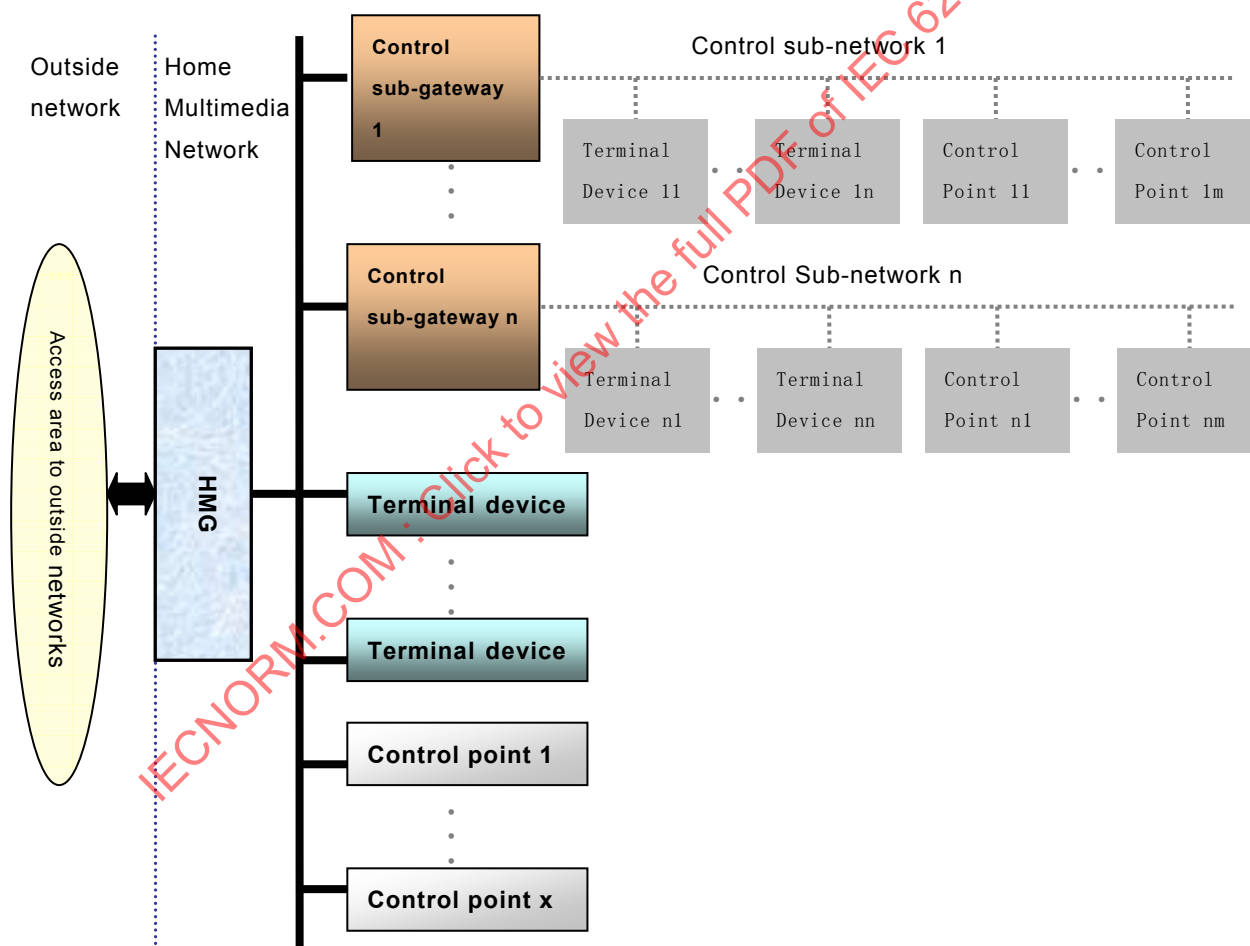


IEC 1077/10

Figure 1 – Architecture for a home multimedia network

## 4.2 HMG architecture

### 4.2.1 General

From the aspect of functional structure, the HMG provides such functions as multimedia processing and applications, interconnection, QoS and security, etc. The architecture of the HMG is shown in Figure 2 below.

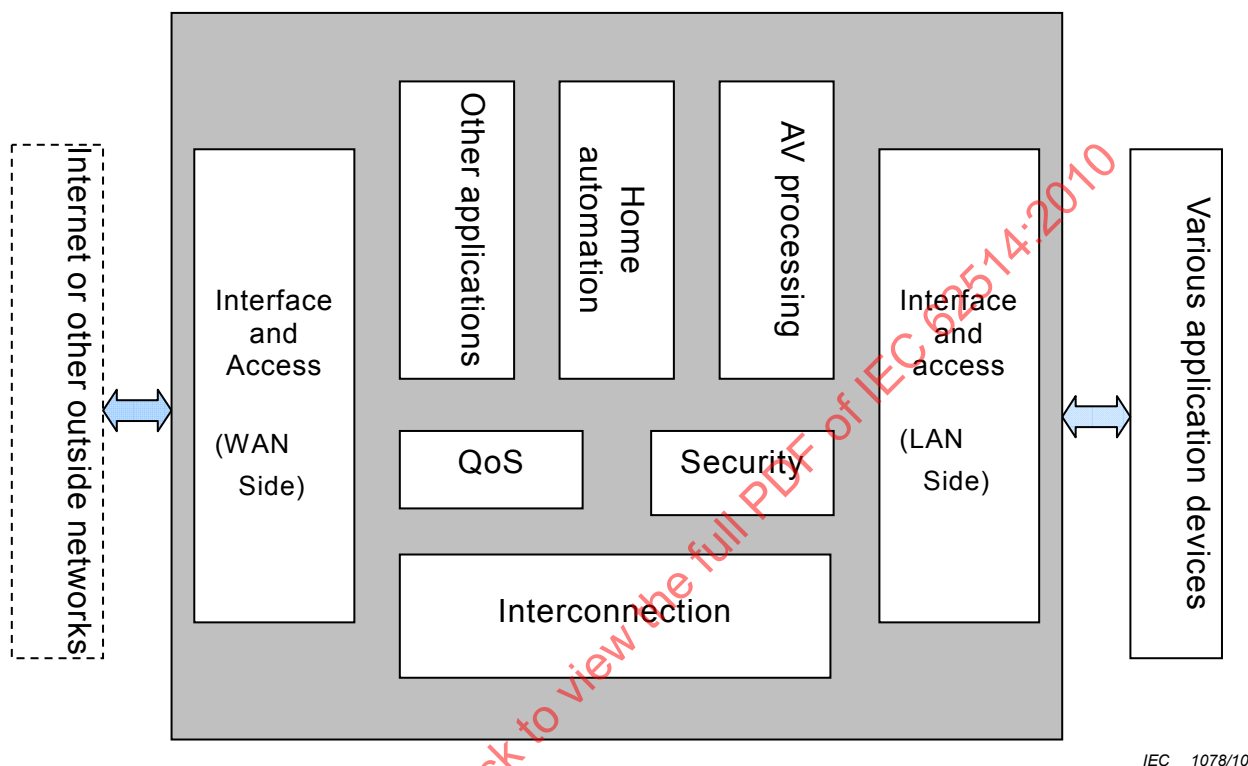

IEC 1078/10

**Figure 2 – HMG architecture**

### 4.2.2 AV processing

The HMG shall provide various application services of video and audio in the home multimedia network. It shall fully support all the functions of MIU (includes MSCP, MRCP), DMP<sub>r</sub> and +UP+/+DN+/+PR+, which are defined in IEC 62481-1 and IEC 62481-2.

### 4.2.3 Home automation

The HMG can offer local management and remote management as well as various control services to the devices in the home network.

### 4.2.4 QoS

HMG should support QoS features in order to transport multimedia contents effectively in the home network where the HMG is involved.

If HMG supports QoS features, then HMG shall use priority tag of QoS in order to transfer the multimedia contents that have IEEE 802.1Q User Priority, WMM Access Category or DSCP.

The detailed requirements of QoS shall be compliant with Networking and Connectivity: QoS requirements in IEC 62481-1.

#### **4.2.5 Security**

The HMG shall support DRM, key management, authentication and security to log on outside networks.

#### **4.2.6 Interconnection**

HMG shall support the network management, protocol translation, address assignment, configuration and management on the home networked devices, in different multimedia networks.

#### **4.2.7 Interfaces and access**

These provide the connection between the home network and outside networks (for example the Internet) when necessary, which is optional.

The detailed interface and communication protocol requirements on both LAN side and WAN side are specified in Clause 11. The specific protocol that is to be applied depends on the application case.

### **5 Interconnection requirements**

#### **5.1 General connection requirements**

Where the home multimedia network is an IP network, the requirements for the HMG should be as follows:

- a) HMG shall implement a Dynamic Host Configuration Protocol (DHCP) server in order to assign IP address to DHCP client in the home network where the HMG is involved.
- b) HMG should support Domain Name System (DNS) in order to use device name for better user experience.
- c) Those messages are formatted by using the SOAP HTTP binding, which shall be compliant with ISO/IEC 29341-1.
- d) HMG should collect information with respect to all the devices connected to the home network by using device description and service description of each device in order to manage the devices.
- e) HMG also should control other devices such as HMRec and HMSou by using appropriate actions to realize use cases described in this standard.

HMG shall also conform to the following requirements defined and specified in IEC 62481-1.

- f) HMG shall support a TCP/IP stack that includes IPv4, TCP, UDP, ARP, and ICMP.
- g) HMG may also support general capability recommendations and device recommendations.
- h) The detailed methods of interconnection shall be compliant with 7.3 of IEC 62481-1:2007 (Device discovery and control).
- i) HMG shall support Simple Object Access Protocol (SOAP) header and body elements, and the messages are delivered via HTTP. The HMG as well as HMSou and HMRec support the messaging scheme by using GENA protocol to exchange the event information inside the high-speed system. A control point invokes the action to the device's service in order to control it and when the action has completed or failed, the service returns any results or errors of the action.
- j) HMG shall support the detailed methods of device management.



## **5.2 Address assignment and resolution**

### **5.2.1 Address assignment**

The HMG shall support the functions of address assignment as follows:

- a) HMG shall assign the identifiers to each control sub-network in order to identify different sub-networks.
- b) The control sub-network gateway shall apply for the addresses, which comply for the higher-level network protocol and are composed of sub-network identifier and network address, from the HMG.
- c) The HMG shall have the following address assignment functions.
  - 1) The HMG shall support DHCP server to assign the addresses for the devices managed in the home network. Through a management and configuration interface on the HMG, the DHCP can be enabled or disabled, and the data such as address pool assignment on the DHCP can be configured as well.
  - 2) The terminal devices shall also support AutoIP in case there is no DHCP server in the sub-network.

### **5.2.2 Address resolution**

The HMG shall support the functions and requirements of address resolution as follows:

- a) If the source devices and destination devices are located in the same control sub-network or multimedia network, then the HMG shall forward the data packet directly without any processing.
- b) If the source devices and the destination devices are not located in the same control sub-network or multimedia network, then
  - 1) The source devices shall know the identifier and network address of the control sub-network or multimedia network in which the destination devices are located.
  - 2) The HMG shall resolve the data packet sent from the source devices and identify the identifiers and network addresses of the control sub-network or multimedia network in which the source devices and destination devices are located respectively.
  - 3) The HMG shall confirm the network and address of the destination devices located according to the identifier and network address of that control sub-network or multimedia network.
  - 4) The HMG shall confirm the communication protocol of the destination devices from the device registry.
  - 5) The HMG shall then re-pack the data and send to the destination device in accordance with the communication protocol confirmed.
- c) The HMG shall support the ARP protocol as well.

## **5.3 Data transfer**

The HMG

- a) shall support router working mode, bridge working mode or the hybrid working mode of both router and bridge,
- b) shall support the static router in the router working mode,
- c) should support the dynamic router and support RIP V1/V2 in the router working mode.
- d) shall support NAT and NAPT in accordance with RFC 2663 and RFC 3022 in the bridge working mode.
- e) shall support the transparent bridge protocol in accordance with IEEE 802.1d in the bridge working mode.

- f) shall support the relevant functions of both router working mode and bridge working mode when working the hybrid mode of router and bridge.

#### **5.4 Protocol translation**

The HMG shall support the application protocol translations when communicating and interacting among different networks or sub-networks.

### **6 AV processing requirements**

#### **6.1 General**

The HMG may offer services for applications in home network systems. In summary, service requirements include multimedia transformation and multimedia stream control and may be fulfilled by using the services and actions which are defined by UPnP AV specifications (ISO/IEC 29341-3) and DLNA guidelines (IEC 62481). All these AV processing services need some requirements for hardware and software of the HMG.

#### **6.2 Multimedia transformation service**

##### **6.2.1 Requirements summary**

The following requirements apply.


- a) The HMG shall provide the media conversion service, including code conversion (transcoding), resolution conversion (transcaling), and shall provide the media conversion service of frame rate conversion (transrating).
- b) The HMG should support voice code conversion.
- c) The media conversion service request message shall include the URI of the media resources, which specifies media code format, resolution, frame rate and transport protocols needed by the requester. In the case of getting contents from WMS, it can also include the code format, resolution and frame rate of the requested contents, as well as the media transport protocols supported by the media content owner.
- d) The HMG should be able to convert audio streams into voice streams.
- e) The HMG should be able to convert voice streams into audio streams.
- f) The HMG should be able to provide the video clip function, which shall be done in accordance with the capability of receiving terminals.

##### **6.2.2 Applications mode**

###### **6.2.2.1 Media conversion**

###### **6.2.2.1.1 General**

Media stream conversion is to convert a media stream from one mode to another. It includes code conversion, resolution conversion, rate conversion and transport protocol translation. As shown in Figure 3, the green media stream indicates a dynamic conversion process; the HMG converts a MPEG2 media stream transmitted from the HMSou into an H.264 media stream transmitted through the hyper text transfer protocol (HTTP); then the HMG sends the stream to the HMRec. In case the media server can know the devices at the user's home and the media formats supported, it can use the remaining capabilities of the HMG to convert the media contents on the media server into the format needed by the players. In this way, when such contents are played, they need not be dynamically converted, as the conversion might affect the QoS in real-time playback.

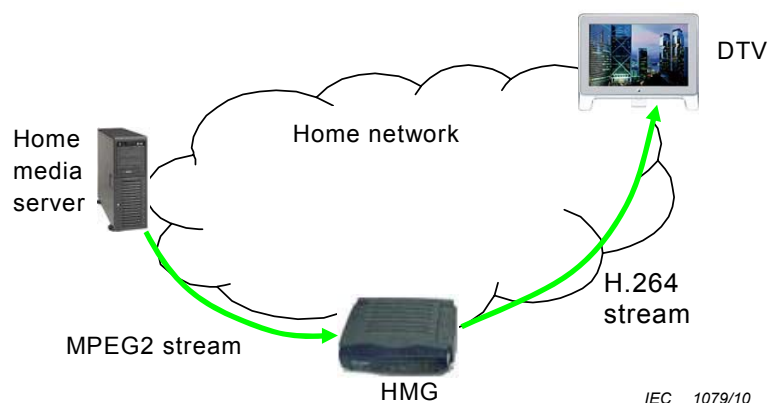

**Figure 3 – Conversion of media streams**

As shown in the Figure 3, media conversion can be performed in two modes. In the first mode, the media sender sends the media to the HMG; then the HMG converts the media and sends it to the media receiver. The one that requests media conversion might be the media sender or the media receiver. In the second mode, the device sends the media to the HMG. After being converted, and the media is returned to the device and is irrelevant with other application devices. In this mode, the HMG can be regarded as an extension of the device. In this case, there is no transport protocol translation.

The following text will describe the possible work modes of the HMG.


#### 6.2.2.1.2 HMRec requests media conversion service

Figure 4 shows the process of how the HMRec requests the media conversion service from the HMG when HMRec gets media resource from HMSou. Here it is supposed that:

- The HMG has obtained the uniform resource identifier (URI) for media resources on HMSou. The HMG can browse/search the directory of devices providing media contents and obtain the URI. The HMG also has obtained the code format, resolution and frame rate of the media resources.
- The HMG shall support to convert the media format and expose all of them in the CDS which is defined in the ISO/IEC 29341 series
- The HMRec has obtained the uniform resource identifier (URI) for media resources on HMG. The HMRec can browse/search the directory of devices providing media contents and obtain the URI. The HMRec also has obtained the code format, resolution and frame rate of the media resources.

The request process is as follows:

- The HMRec sends a request content message to the converted media URI of HMG.
- The HMG sends a request content message to the original media URI of HMSou.
- The HMSou accepts the request of the HMG and sends the original media stream to the HMG.
- The HMG converts the media stream and sends the converted media stream to the HMRec.

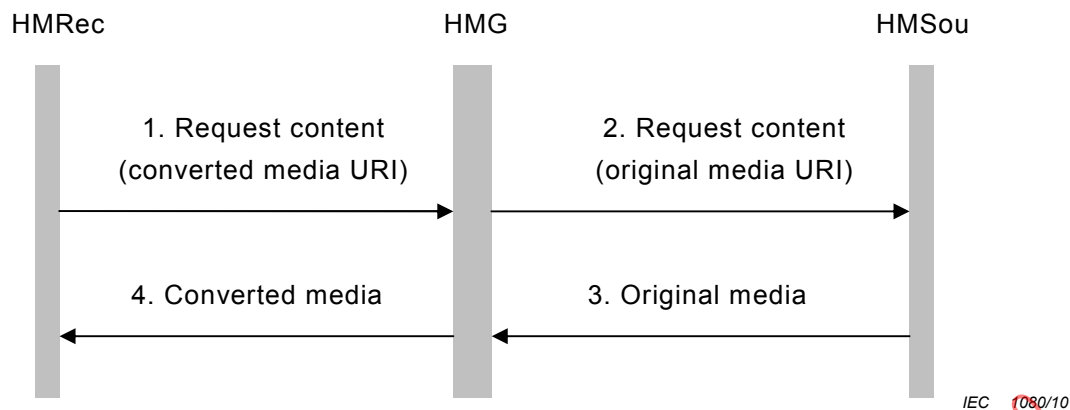

**Figure 4 – HMRec requests media conversion from HMG**

When the MS is the WMS, if DRM and authority management are taken into account, the process shall include the procedure of how the HMG can pass the WMS authentication. Because there are a rich variety of DRM and authority management modes, the HMG can hardly support all DRM systems and authority management modes.

Figure 5 shows an optimized process. Before the HMRec requests the media conversion service from the HMG, it first requests media stream redirection from the WMS. Here it is supposed that:

- The HMRec has obtained the URI of needed media resources.
- The HMRec might have obtained the code format, resolution and frame rate of the needed media resources.
- The HMRec might have known the media transport protocol used by the media sender.
- The HMRec needs the conversion service for sure.
- The HMRec has finished necessary DRM authentication and device authentication with the WMS.

The process is as follows:

- The HMRec sends a Request Redirection message to the WMS, which includes:
  - The URI of the media resources on the WMS requested by the HMRec.
- The WMS satisfies the request of the HMRec and allocates a Request identity (RID) in the response message.


**NOTE** When the media source receives a media service request from the media receiver, it allocates an identity to authenticate the media conversion service device, that is, the HMG, provided by the media receiver (MR). This identity is called the request identity. The media conversion service is originated by the media receiver; the request identity allocated by the media source is transferred to the HMG. When obtaining original media contents from the media source, the HMG needs to provide the request identity to the media source to prove its validity.

- The HMRec sends a request conversion message to the HMG, which includes:
  - The URI of the media resources on the WMS requested by the HMRec
  - The media code format, resolution and frame rate needed by the HMRec
  - Media transport protocols supported by the HMRec
  - RID allocated by the WMS
  - (Optional) media code format, resolution and frame rate of the media contents requested by the HMRec
  - (Optional) media transport protocols supported by the WMS
- If the HMG can accept the conversion request, it can send a message to the HMRec, indicating that the request is accepted; otherwise the HMG shall send a message to refuse the request.

5. The HMG requests the media resources needed by the HMRec from the WMS. The request message shall include the RID and the URI of the media resources on the WMS requested by the HMRec; or the RID shall be sent back upon the request of the WMS. In case the HMG cannot request resources, or if the HMG cannot make conversion after the resources are obtained, it shall send a message to the HMRec, indicating that the service cannot be fulfilled
6. The WMS accepts the request of the HMG after authenticating the RID. Then it sends the original media stream to the HMG.
7. The HMG converts the media stream and sends the converted media stream to the HMRec according to the media code format, resolution and frame rate needed by the HMRec.

In the above procedure, the WMS does not implement DRM authentication on the HMG but transmits the media stream directly. DRM authentication is completed by the HMRec before step 1. The WMS authenticates the RID to verify the validity of the HMG. In this way, the HMG does not need to support various DRM methods, but has new requirements on the WMS.

In practice, encrypted transmission is needed between the WMS and the HMG, and between the HMG and the HMRec. As a result, keys need to be exchanged between the WMS and the HMG, and between the HMG and the HMRec. It is easy to exchange keys between the HMRec and the HMG, as both devices are at home and can adopt a standard method. Because different service systems in the WAN adopt different DRM systems and different encryption algorithms, it is hard for the HMG to satisfy the media conversion requests from various service terminals. It is easy to unify the DRM method in the home network; however, it is hard to unify various services in the WAN. The HMG is required to support various encryption algorithms and key exchange methods. Even if a control channel is reserved between the HMRec and the WMS for key exchanges, through which the HMRec sends to the HMG the key exchanged with the WMS, the HMG still needs to support multiple encryption algorithms.

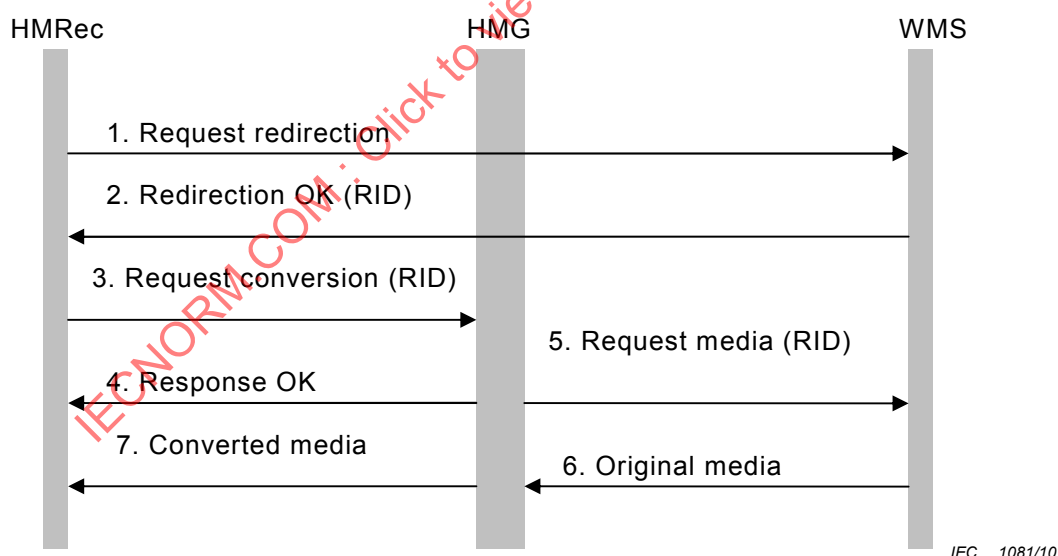

**Figure 5 – HMRec requests WMS to support redirection**

#### **HMG requirements:**

- a) The HMG shall provide the media conversion service. Upon receiving a media conversion request message from the HMRec, it should request media contents from the WMS.
- b) The HMG should judge whether it can accept the media conversion request according to the capability needed by the requester, available capability, and its processing capability.

- c) If the HMG finds that it cannot satisfy the requirement of the conversion service requester after obtaining the media resources, it should send a message to the conversion service requester, explaining that the conversion service cannot be fulfilled.
- d) The HMG should support the conversion of streaming media.
- e) The HMG should support the DRM.
- f) If the HMG receives a RID from the HMRec, it shall include the RID when requesting media contents from the WMS; or it shall feed back the RID upon the query of the WMS.
- g) The HMG should support encrypted transmission with the WMS.
- h) The HMG should support encrypted transmission with the HMRec.
- i) The HMG should support various encryption algorithms.
- j) The HMG should support various key management methods.

**WMS requirements:**

- a) The WMS should be able to accept the media redirection request of the HMRec.
- b) After the WMS accepts a media redirection request from the media receiver, it can allocate a RID to the media receiver so as to authenticate the HMG.
- c) Existing DRM methods should be optimized to support the media conversion service.
- d) New DRM methods should be adopted to support the media conversion service.

**HMRec requirements:**

- a) The HMRec should be able to send a media redirection request to the WMS.
- b) The HMRec should be able to request the media conversion service from the HMG. The request message should include the URI of the media resources, media code format, resolution, frame rate and transport protocols needed by the HMRec. It can also include the code format, resolution and frame rate of the requested contents, as well as the media transport protocols supported by the media content owner.
- c) If the HMRec sends a media redirection request to the WMS and receives a RID allocated by the MS, it should include this RID when sending a media conversion service request to the HMG.


**6.2.2.1.3 HMSou requests media conversion service**

When the HMSou actively sends media contents to the HMRec, it can request the media conversion service from the HMG and sends media contents to the HMRec after they are converted.

Supposing that

- a) The HMG shall support to convert the media format and expose all of them in the CDS, then the process in Figure 6 is as follows.
- b) The HMSou sends a request conversion message to the HMG, requesting the media conversion service. The message may includes
  - the media code format, resolution and frame rate of the media contents sent by the HMSou,
  - the media transport protocol of the HMSou,
  - the URI for the media source sent by HMSou.
- c) The HMG sends a request conversion message to the HMRec, requesting the media conversion service. The message may includes
  - the media code format, resolution and frame rate of the media contents sent by the HMG,
  - the media transport protocol of the HMG,

- the URI for the media source sent by HMG.
- d) The HMRec requests the converted media content from the HMG.
  - e) The HMG requests the original media content from the HMSou.
  - f) The HMSou transmits media streams to the HMG.
  - g) The HMG converts media streams and sends them to the HMRec.

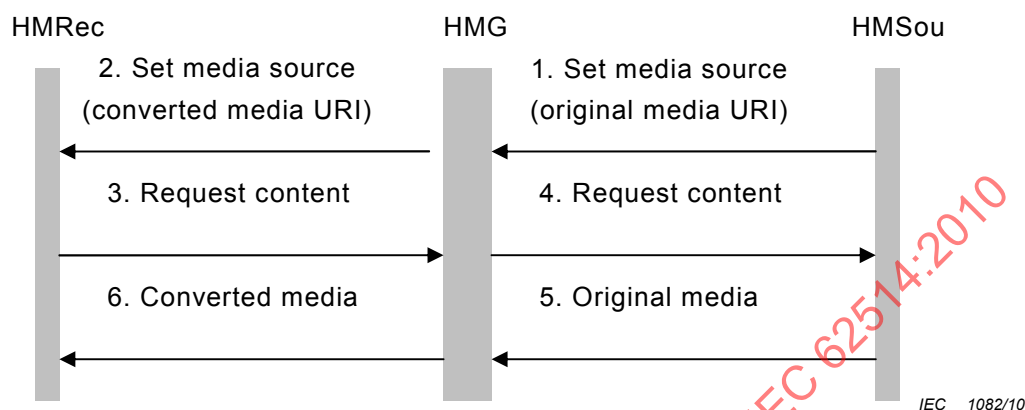

**Figure 6 – HMSou actively sends media to HMRec**

The HMSou and the HMRec might be located in different home networks. As a result, the HMG can be in the same home network as the HMSou or the HMRec. In case the HMG and the HMSou are in the same home network, the HMSou can know the HMG address through automatic discovery or configurations. In case the HMG and the HMSou are in different home networks, the HMRec shall notify the HMSou of the HMG address.

#### **HMG requirements:**

- a) The HMG shall support to convert the media format and expose all of them in the CDS.
- b) In the case of the HMG cannot fulfill the conversion process, it shall notify the HMSou that the conversion service cannot be fulfilled.

#### **HMSou requirements:**

The HMSou should send a Set Media Source request to the HMG when transmitting media contents. The request message from the HMSou may include the media code format, resolution and frame rate of the transmitted media contents, as well as the transport protocols used by the HMSou.

#### **HMRec requirements:**

The HMRec should receive and interpret Set Media Source request properly and send Request Content to HMG accordingly.

#### **6.2.2.2 Video clip**

Video clip is to clip some parts from high-resolution video pictures and transmit them to a low-resolution media terminal. For example, in video surveillance, the resolution of the pictures provided by a camera might be 720×480. When a user views a picture taken by the designated cameras through a hand-held device, for example his mobile phone, the user needs to zoom out the picture, as the screen of the hand-held device is quite small; otherwise, the user can only see part of the picture. Besides, the media source does not need to send all original data to the hand-held device. The user can view part of the picture taken by the cameras to keep the high definition of the picture. If so, the system can clip the expected part of the original video picture and encode it before transmitting to the hand-held device. As a result, the quantity of data transmitted can be reduced. The user can move the picture on the terminal and send commands



to the HMG to update the coordinates of the clipped picture. When a camera is fixed, the user can view different parts of the picture. Because the uplink bandwidth of the home network is always small, the picture can be clipped and encoded before being transmitted. In this way, the uplink bandwidth can be saved, while loads on the access network and the public network can be lessened. Figure 7 shows the video clip applications.

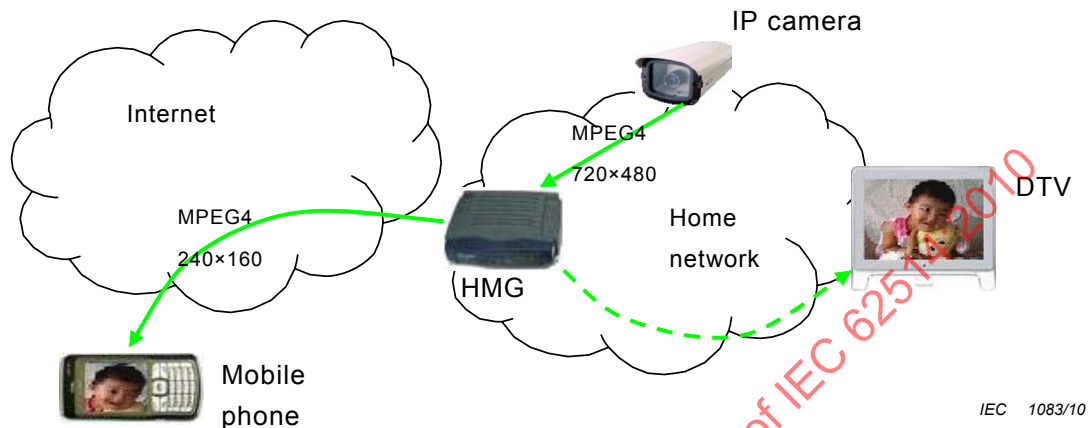


Figure 7 – Video clip

#### HMG requirements:

- The HMG can provide the video clip function. The service request message should include the relative coordinates and the scale of the video receiving terminal.
- HMG should be able to quickly respond to the coordinates switching command sent by the terminal.

### 6.3 Multimedia stream control service

#### 6.3.1 Requirements summary


- The HMG should be able to provide the AV media stream division service and divide the audio and video parts into two streams.
- The HMG should be able to provide the stream combination service and combine the video stream and the voice/audio stream into an AV stream.
- The HMG should be able to provide the media stream duplication service, which supports multiple player terminals to receive the same media content.
- The HMG should be able to use the Internet group management protocol (IGMP) to multicast media streams to provide the duplication function.
- The HMG should be able to duplicate unicast streams to provide the duplication function.
- The HMG should be able to provide the media stream redirection service.

#### 6.3.2 Application mode

##### 6.3.2.1 Stream division


Stream division is to separate the audio part from the video part of an AV media stream so that they can be transmitted through different channels. In a videophone stream, the voice stream is separated by the HMG from the video stream, the voice stream is transferred to videophone and the video stream is transferred to TV. In the stream division operation provided by the HMG, the audio part might not be converted into voice contents, but simply separated from the video part and transmitted. This process shall be executed according to the instructions of the device. Figure 7 shows the AV media stream division.



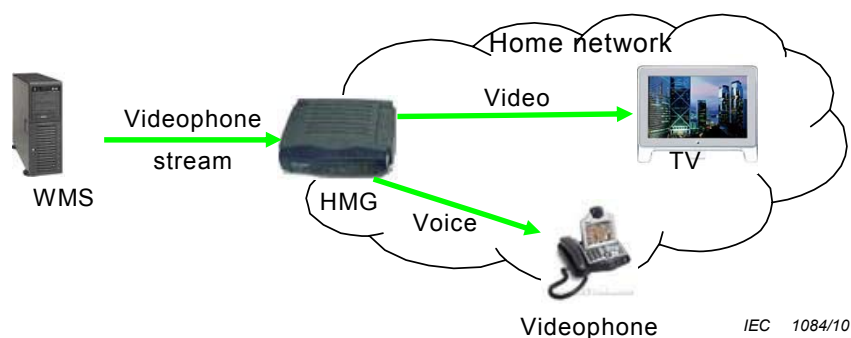

**Figure 8 – AV media stream division**

The stream division operation is a process in which the media receiver requests the media conversion service, see Figure 9.

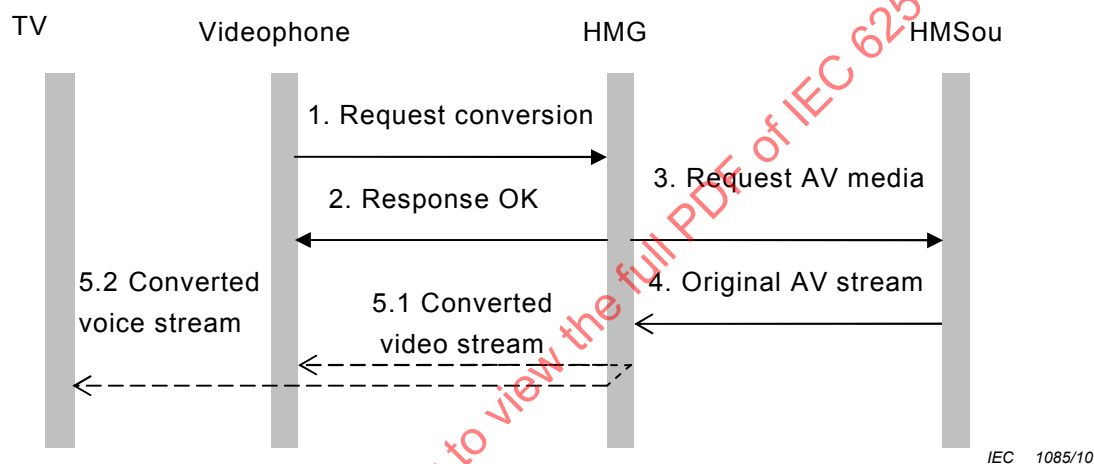

**Figure 9 – Stream division process**

#### HMG requirements:

- The HMG should be able to provide the AV media stream division function and divide the audio part and the video part into two streams.
- The HMG should be able to convert audio streams into voice streams.
- The HMG shall set up channels with the videophone for video and voice transmission.
- The HMG shall be able to set up channels for video and voice transmission with the stream division service requester, and send video and voice to the service requester.
- If the HMG provides the stream division service, the stream division request message shall include the URI of the AV resources, needed video code format and voice code format.


#### Videophone requirements:

- The videophone shall be able to set up IP connections with the HMG.
- The videophone shall be able to request the stream division service from the HMG. The request message shall include the URI of AV resources.

#### 6.3.2.2 Stream combination


Stream combination is reverse to stream division. In video communications, the user might use the cameras to capture video stream and videophone to capture voice stream, the HMG should combine the video stream and the voice stream into an AV stream before forwarding it to the WMS.

Figure 10 shows the stream combination application.

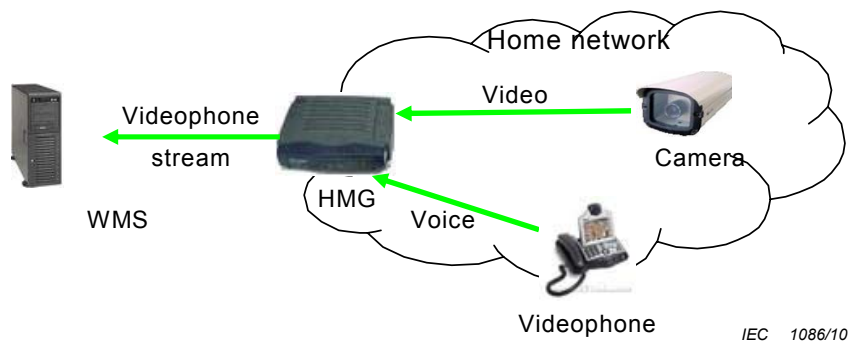

**Figure 10 – Combination of media streams**

The stream combination operation is a process in which the media sender requests the media conversion service, see Figure 11.

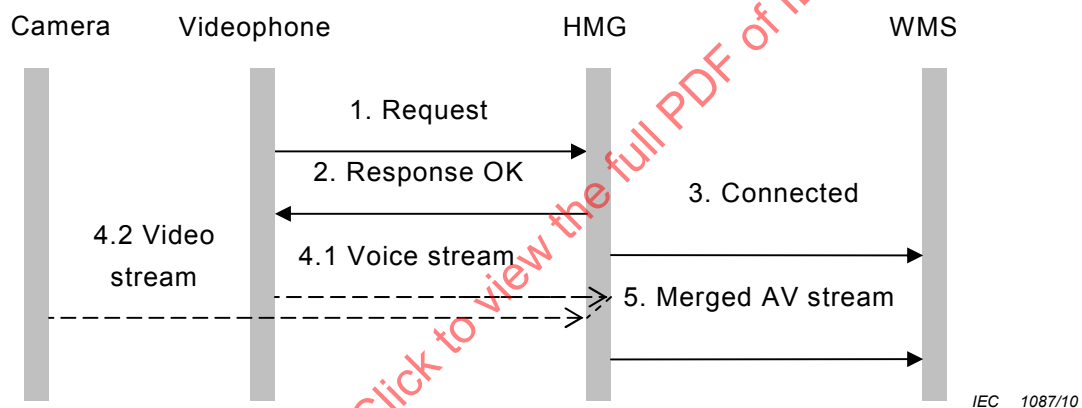

**Figure 11 – Stream combination process**

**HMG requirements:**

- The HMG should be able to provide the function of combining video and voice streams into an AV media stream.
- The HMG shall be able to convert voice streams into audio streams.
- The HMG shall set up channels with the videophone for voice and video transmission.
- If the videophone does not indicate the audio and video code formats at the AV stream receiver in the stream combination request message, the HMG shall be able to interact with the AV stream receiver and obtain the code formats.
- If the HMG provides the stream combination service, it shall be able to set up channels for video and voice transmission with the stream combination service requester, and receive video and voice from the service requester.
- If the stream combination service requester does not specify the audio/video code formats used by the AV stream receiver in the stream combination request message, the HMG shall be able to interact with the AV stream receiver to get the code formats.


**Videophone requirements:**

- The videophone shall be able to set up IP connections with the HMG.

- b) The videophone can request the stream combination service from the HMG. The request message shall include the address of the AV stream receiver and possibly the audio and video code formats needed by the receiver.

### 6.3.2.3 Duplication

Media stream duplication is to duplicate the transmitted media stream and send it to multiple receiving terminals. In general, the media server can support multicast protocols and support the preceding duplication operation. Nevertheless, if the media stream is to be converted, the HMG becomes the last multicast node on the multicast path and converts the media stream before sending it to multiple terminals. The HMG can also duplicate the media stream through the multicast technology of the application layer, thus generate multiple uni-cast streams. When different receiving terminals need different codes, resolutions and transport protocols, the HMG shall duplicate the media stream separately and send them after conversion. Figure 12 shows application for duplication of media streams.

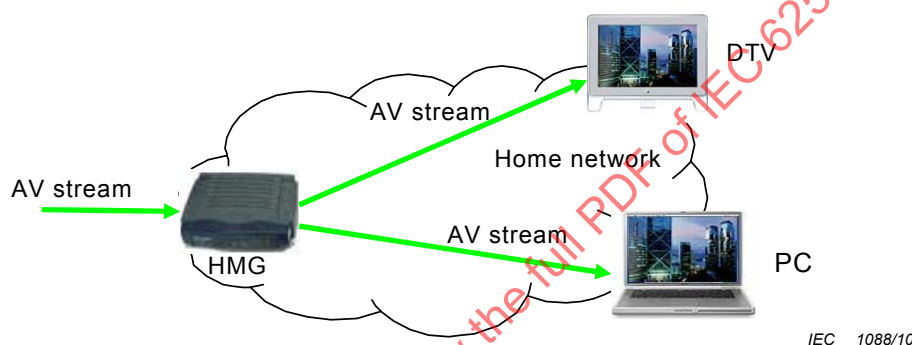

**Figure 12 – Duplication of media streams**

The duplication operation can be regarded as an application terminal joining a multicast group. There may be two cases:

- the original media stream passes through the HMG;
- the original media stream does not pass through the HMG.

In the first case, the duplication operation occurs on the HMG and can be easily fulfilled. In the second case, if the media server does not support the duplication operation, considerations shall be made about how to redirect the media stream to the HMG.


In user operations, there are two cases might lead to the duplication of the media stream. Suppose HMRec1 is playing a program, while the media stream shall be duplicated to HMRec2.

- The user operates HMRec1. The user browses the list of players and selects HMRec2. HMRec2 can be used to watch the program being played by HMRec1.
- The user operates HMRec2. The user browses the list of programs and selects the program being played. Both HMRecs can play the same program simultaneously. The user can browse the list of players on HMRec2 and select HMRec1 to join the multicast group of the program being played on HMRec1.


In either of the above operations, if the media stream passes through the HMG, operation commands will be sent to the HMG, which directly duplicates the media stream to HMRec2. If the media stream does not pass through the HMG, operation commands shall also be sent to the HMG. This can avoid the situation in which the media server does not support duplication operations. For example ordering programs on the WAN media server, in this case, the media stream shall be switched to the HMG and forwarded from the HMG to HMRec1. Then the media

stream can be duplicated to HMRec2. That is, in case the media stream does not pass through the HMG, operations shall be done so that the media stream passes through the HMG.

Figure12 and Figure13 show how HMRec1 duplicates the media stream to HMRec2 and how HMRec2 requests to join the multicast group of the program being played on HMRec1, in the case of the original media stream passes through the HMG. The HMRec1 and HMRec2 which supports DMC function of DLNA can satisfy the both flows in Figure 13 and Figure 14.

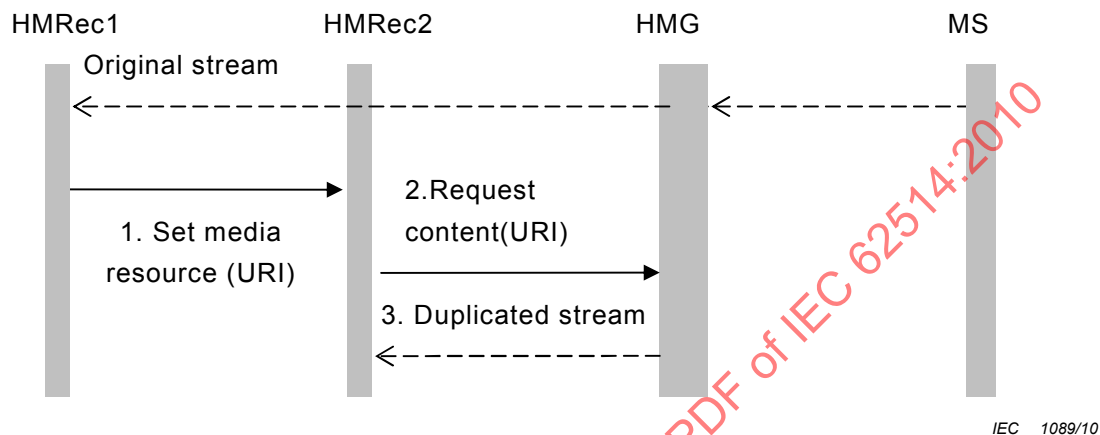


**Figure 13 – HMRec1 duplicates media stream to HMRec2**

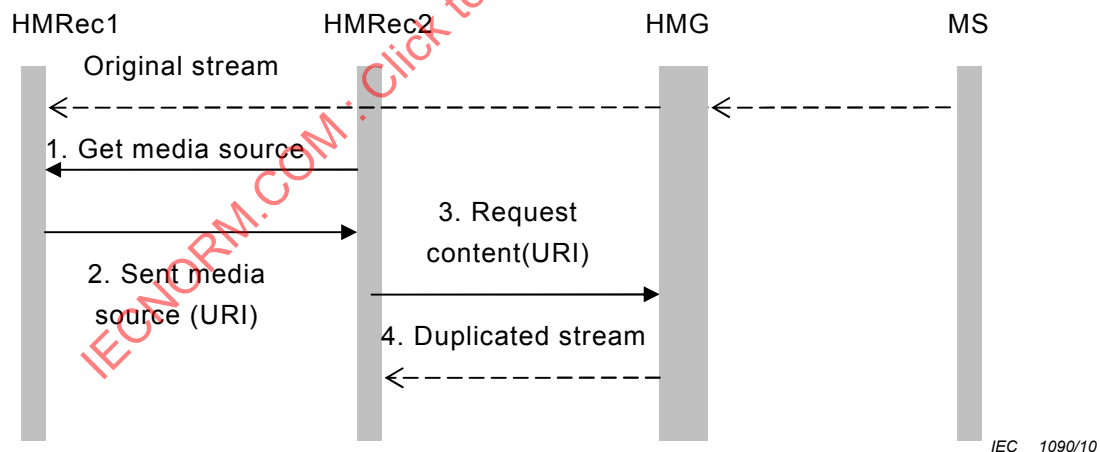

**Figure 14 – HMRec2 requests to join the multicast group of the program being played on HMRec1**

Figure 15 shows how HMRec1 requests the duplication of the media stream to HMRec2 in case the original media stream does not pass through the HMG. Steps 1–4 are similar to the process of requesting media conversion shown in Figure 3. Here the HMG is not used for media conversion. The media stream passes through the HMG to facilitate duplication operations. The request message in step 1 shall include the URI of the program being played and the position of contents played. Here the media conversion request message can be used. The media format and other parameters needed by HMRec1 are completely consistent with the parameters provided by the MS. In the media conversion request, a parameter can be added to indicate the start position of playback. When the HMG requests media contents from the MS in step 3, this


position information shall be included in the request message. Then the MS shall send contents to the HMG from the designated position. The HMRec1 which supports DMC function of DLNA can satisfy the flow in Figure 14.

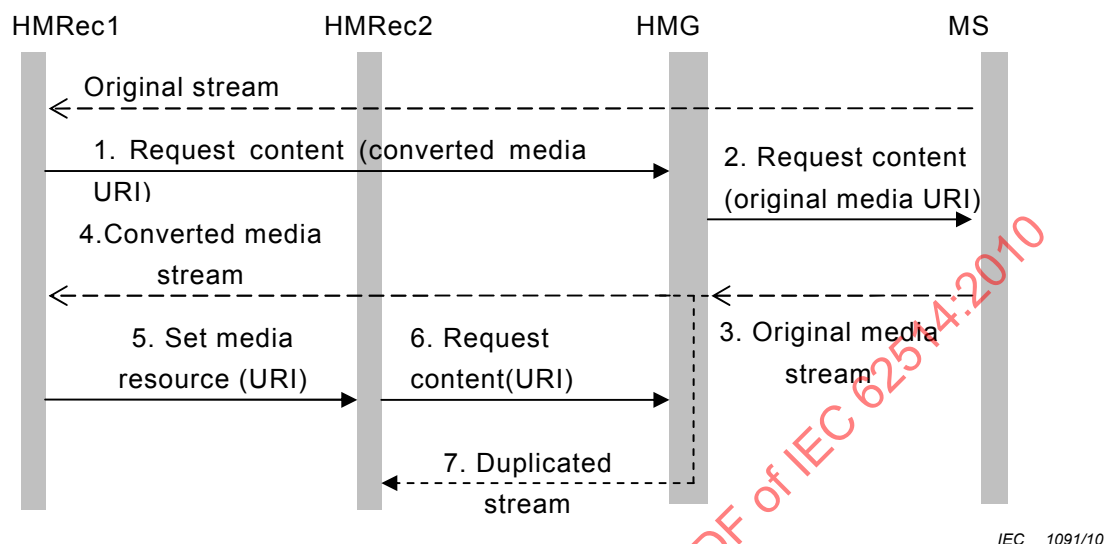

**Figure 15 – HMRec1 requests media stream from HMG and duplicates media stream to HMRec2**

Before step 1, HMRec1 shall terminate the media transmission connection with the MS. This procedure is not included in Figure 15. Because HMRec1 needs to receive subsequent media contents from the HMG after terminating the connection with the MS, the playback on HMRec1 will be interrupted temporarily during the duplication process.

Like the defect of the media conversion method shown in Figure 4, the method shown in Figure 15 can hardly be realized if DRM, device authentication or user identity authentication is involved. Figure 16 shows the duplication process by requesting media redirection, which is similar to Figure 5. The request messages in step 3 and step 5 shall include the stream position information. The HMRec1 which supports DMC function of DLNA can satisfy the flow in Figure 16.

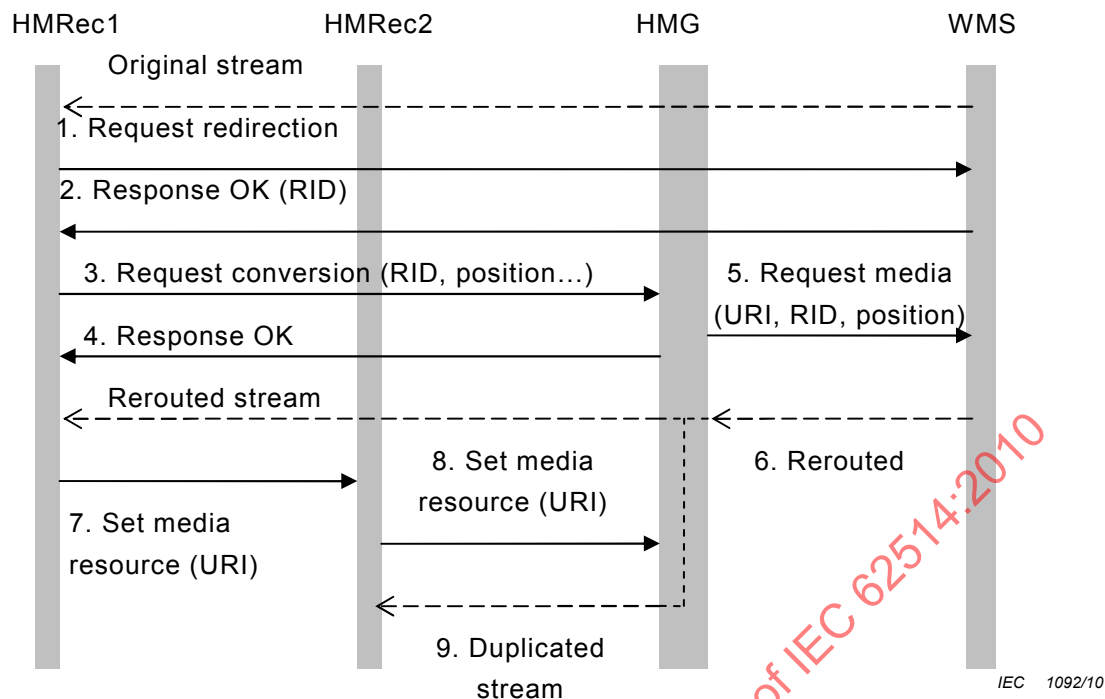

**Figure 16 – HMRec1 duplicates media stream to HMRec2 after requesting MS to redirect media stream to HMG**


In case the original media stream does not pass through the HMG, HMRec2 can request to join the multicast group of the media stream being played on HMRec1. If DRM and authentication are not considered, the process shown in Figure 16 can be adopted, but request messages are all sent by HMRec2. If DRM and authentication are taken into consideration, HMRec2 shall first log on to the MS for authentication; the HMRec2 can adopt the process shown in Figure 16; request messages are all sent by HMRec2.

#### **HMG requirements:**

- The HMG shall be able to provide the media stream duplication function and support multiple player terminals to share the same media contents.
- The HMG should be able to use the Internet group management protocol (IGMP) to multicast media streams so as to provide the duplication function.
- The HMG should be able to duplicate unicast streams to provide the duplication function.
- If the HMG supports the duplication function, it shall support direct duplication when the original media stream passes through the HMG.
- If the HMG supports the duplication function, it shall support the duplications in the case of the original media stream does not pass through the HMG.
- If the HMG supports the duplication function, it shall support the request of the original media stream receiver for duplicating the media stream to other terminal devices.
- If the HMG supports the duplication function, it shall support the request of the terminal device for joining the existing multicast group of a media stream.
- If the HMG supports the duplication function, it shall support the media stream redirection.
- If the HMG supports the duplication function, it shall support exceptional conversion operation, which is the forwarding of the media stream without conversion.
- If the HMG provides the duplication service, when the original media stream receiver requests to duplicate the media stream to other terminals, the duplication operation can succeed even if the destination terminal device is off. After the destination terminal device is turned on, it will automatically receive duplicated media streams.

#### 6.3.2.4 Redirection


The redirection operation is to change the transmission destination of the media stream to another device, as shown in Figure 17. This operation is oriented to the user shift programs on the original media receiving terminal. The bookmark technology is adopted to suspend the playback of the redirected media stream. When the user moves to a new media receiving terminal, the user can perform a simple operation to resume playing the paused program.

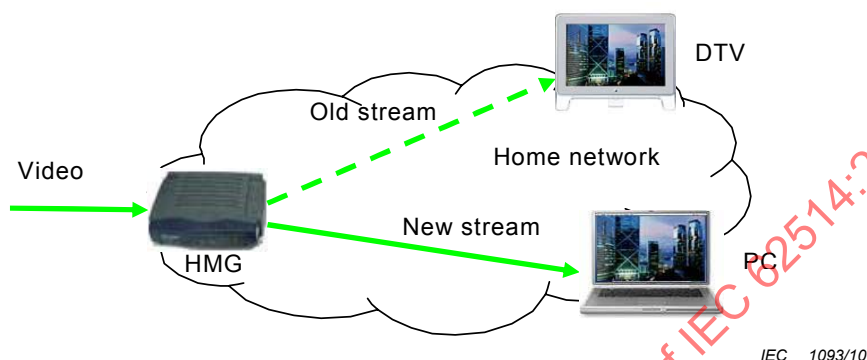

**Figure 17 – Media stream redirection**

The above figure shows the redirection of the original media stream when it passes through the HMG. Authentication is also considered in the process. First of all, HMRec1 sends a request redirection message to the HMG. The message shall include the temporary URI of media contents allocated by the HMG to HMRec1. Upon receiving the request message, the HMG saves the media stream location information and sets a bookmark. It terminates the media stream under transmission. HMRec2 can get the bookmark from HMG. After media redirection, HMRec2 shall show the user that the program is paused and display the last picture at pause. The HMRec1 and HMRec2 which support DMC function of DLNA can satisfy the flow in Figure 17. The HMRec1 and HMG which support DMR function of DLNA can get and record the status of media, so they can support the media redirection function.

Figure 18 shows the HMRec1 requests to redirect media stream to HMRec.

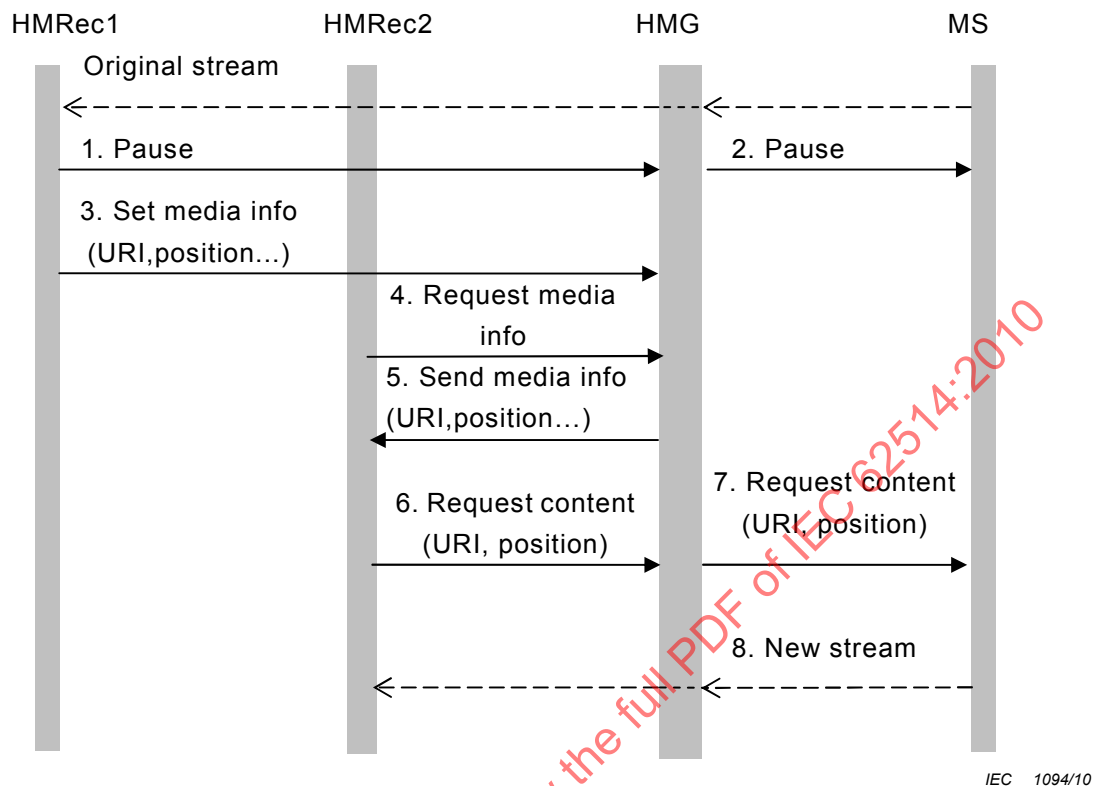

**Figure 18 – HMRec1 requests to redirect media stream to HMRec2**

#### **HMG requirements:**

- a) If the HMG provides the media stream redirection service, the redirection operation can be conducted even when the destination device is off.
- b) If the HMG successfully redirects a media stream, the position where the media stream pauses shall be recorded.
- c) If the HMG successfully redirects a media stream, the last picture at pause shall be sent to the destination device of the redirection.
- d) If the redirection operation is successful, the destination device of the redirection shall support the HMG to continue transmitting the media stream through the play operation.

### **6.3.3 Content directory service**

#### **6.3.3.1 Overview**

Media resources might come from multiple devices or channels. To guarantee good user experience, the user shall access the resources from a uniform ingress. IEC 62481-1 has proposed the concept of virtual media server, which is used to provide a unified content directory. This standard will expand the so-called media resources so that they are not restricted to media contents. Printers and surveillance cameras are also accessible media resources rather than merely devices.

#### **6.3.3.2 Unified content directory**

In a home network, media contents might exist in multiple devices, for example one or several home media servers, STB with hard disk, laptop, digital camera or video camera, and mobile




phone that can take pictures. When searching for media contents in the home network, the user might want to see a unified content directory, which classifies contents according to a certain method. The user can query contents by category or key words, instead of searching all devices. In this way, the user can get pleasant experience. This task can be enabled by the HMG. The HMG collects all possible media contents in the home network and presents them to the HMRec in the unified directory mode. The HMRec needs to connect to the HMG to access this unified directory. Moreover, the HMG can contain the directory of contents on registered media servers, for example the electronic program guide (EPG) for IPTV.

By combining media content directories on various media source devices, the directory service of the HMG provides single directory ingress for the HMRec, which can order media programs in all positions. When the HMRec searches for a program in the home network, it first accesses the unified directory provided by the HMG, browses the programs and makes a selection. In this process, the HMRec can know the encoding and decoding formats, resolution and frame rate of the selected media program. The HMG can know the playback capability of the HMRec. When the HMRec decides to play the program, it can send the media data through the HMG. If no data conversion is needed, the HMRec can directly obtain media data from the media source device according to the URI of the media content provided by the HMG. When the HMRec decides to play the program, if the HMG knows that the HMRec cannot play the selected media contents, the HMG redirects the URI provided to the HMRec to the HMG itself. The HMRec requests the selected contents from the HMG, then the HMG requests the contents from the actual media owner and sends them to the HMRec after conversion. On the contrary, if the HMG knows that the HMRec can directly play the selected media contents, it redirects the URI provided to the HMRec to the media content owner, and the HMRec requests the selected media contents from the media owner.

Figure 19 shows the preceding process in which the HMG needs to implement media conversion. During this process, the HMRec does not request the media conversion service from the HMG, because the URI provided by the HMG to the HMRec points to the HMG. In this case, the HMRec can regard the HMG as the provider of media contents in the designated format.

If the URI provided by the HMG to the HMRec points to the HMSou, the HMRec can request the media conversion service from the HMG, if it obtains media contents from the HMSou but cannot play the contents. In this case, the process as described in Figure 4 should apply.

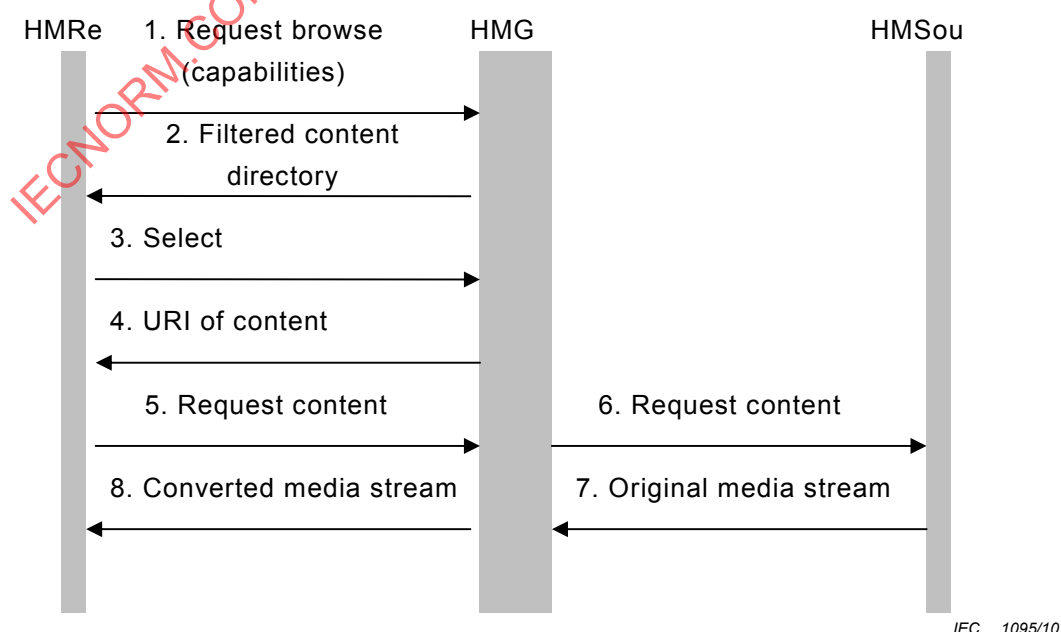

**Figure 19 – HMRec selects media contents through the directory service of HMG**

When the HMRec accesses the directory service of the HMG, the HMG can know the type of media services played by the HMRec. The directory only shows the media types that can be played by the HMRec, as indicated by steps 2, 3 and 4 in Figure 19. For example, for an electronic photo frame that only plays photos, the HMG merely presents the collected photos to the photo frame; for an MP3 player, the HMG presents music media contents.

#### HM requirements:

- a) The HMG should provide the unified directory service.
- b) The HMG should be able to collect media contents from various media devices in the home network to form a unified directory.
- c) The HMG should be able to classify media contents according to various standards, including the content type, content creation time, content creator, content author, and content title.
- d) The HMG should be able to query contents according to key words.
- e) If the HMG detects that the HMSou can directly provide the contents requested by the HMRec without conversion, the URI provided by the HMG to the HMRec can point to the HMSou; otherwise, the URI points to the HMG. In this case, the HMG should actively obtain contents from the device that contains the selected media contents and transmit the contents to the HMRec after conversion.
- f) The HMG should filter all media contents according to the media types requested by the HMRec and present the directory of filtered contents to the HMRec.

#### HMSou requirements:

The HMSou should provide the directory query interface, media content directory and contents.

#### HMRec requirements:

The HMRec should be able to automatically connect to the HMG to access its directory and browse the directory.

### 6.4 Media format requirements

The media format requirements shall fully support the specification of IEC 62481-2.

What specific media format is applicable depends on the application case it may be.

In order to establish the actual interoperability, IEC 62481-2 defines profileIDs which specify various parameters of those codecs. The serving endpoint such as HMSou and HMG expose profileIDs which they support and the rendering endpoint such as HMSou and HMRec use those profileIDs to identify the rendering capabilities.

**Table 1 – Mandatory and optional media formats**

| Media class | Mandatory format set                   | Optional format set   |
|-------------|--|---|
| Images      | JPEG                                   | GIF, TIFF, PNG  |
| Audio       | LPCM (2 channel), MP3 and MPEG4 AAC LC | WMA9, AC-3, MPEG2 AAC, ATRAC3plus, MPEG4 (HE AAC, AAC LTP, BSAC), AMR, ATRAC3plus, G.726, WMA, LPCM |
| Video       | MPEG2, MPEG4 AVC (AAC LC Assoc Audio)  | MPEG1, MPEG4, WMV9, VC1, H.263, MPEG4 part 2, MPEG4 AVC (BSAC or other for Assoc. Audio)            |

## 7 Home automation requirements

### 7.1 Requirements summary

In the home network system, the automation and control applications of the home network can be supported by the HMG. HMG should support all the requirements of ISO/IEC 14762. Clause 7 describes some typical multimedia applications supported by the HMG.

- a) device control functionality in directory services (7.2).
- b) multimedia message service (7.3).
- c) devices management service (7.4).
- d) meters reading service (7.5).
- e) household appliance control service (7.6).

### 7.2 Devices in directory

#### 7.2.1 Printer

The directory services provided by the HMG should include the printer. When the user uploads photos or pictures from video to the printer through any device, it means that the photos or pictures should be printed. The HMG should provide the printer driver and printing task management.

#### HMG requirements:

- a) If the home network contains a printer, the directory services provided by the HMG should include the printer. The HMG should be able to detect the printer automatically or configure the printer passively.
- b) When the HMRec uploads pictures and text contents to the printer directory, the HMG should regard them as printing tasks. In case the pictures and text contents cannot be printed immediately, a prompt should be provided.
- c) If the printer is not a network printer, the HMG should support the printing task management function.
- d) The HMG can convert the contents uploaded from the HMRec to the printer into the needed format.
- e) The HMG should only present the printer in the directory views of uploaded pictures and text contents.

#### 7.2.2 Surveillance cameras

The directory services provided by the HMG should also include the surveillance cameras. When the user selects a cameras through the video terminal, it means that the user needs to view the current picture of the cameras. The HMG can automatically provide resolution conversion and coding/decoding conversion services according to the capability of the terminal device. It can also clip pictures according to the operations on the terminal. The HMG should also consider the situation when multiple application terminals access the same camera at the same time.

#### HMG requirements:

- a) If the home network contains a surveillance cameras, the directory services provided by the HMG should include the cameras. The HMG should be able to detect the cameras automatically or configure the cameras passively.
- b) When an application terminal selects the cameras, the HMG should regard it as viewing cameras contents. The HMG should actively receive the contents from the cameras and perform conversion, compression and clipping operations according to the requirements of the application terminal.

- c) The HMG should support multiple application terminals accessing the same camera at the same time.
- d) The HMG should only present the cameras in the directory views of downloaded pictures and videos.

### **7.2.3 Intelligent household appliance**

The directory services provided by the HMG can also include the controllable home appliances. When the user selects a home appliance, it means that the user is to control the home appliance. In this case, the HMG can send a control Web page to the terminal, and the terminal controls the home appliance through the control Web page.

#### **HMG requirements:**

- a) The HMG should be able to support control on home appliances and can list home appliances in the directory.
- b) When a terminal selects a home appliance, the HMG can send a control Web page to the terminal. The Web page can be provided by the HMG or the home appliance itself.
- c) Home appliances should only appear in the directory views accessed by Web-enabled terminals.

### **7.3 Multimedia message application**

#### **7.3.1 Requirements summary for HMG**

- a) The HMG should be able to provide email detection and notification functions.
- b) If the HMG provides the email detection function, it should send the notifications of new emails to the device that can receive the notifications in the user's home network, for example the STB, intelligent telephone and the user's personal device.
- c) If the HMG provides the email detection function, it should provide an interface to configure the user's email address, user name, personal device, public device that can receive the email, and password for viewing the email text through the public device.

#### **7.3.2 Multimedia message**

A multimedia message application means a device generates an event and sends a message, which is presented in the multimedia form in the home network. For example, when the user is watching TV while the fixed telephone rings, the user can see the calling number on the TV screen. Another example is that the user hears a voice saying the clothes are all washed when he is reading a newspaper in the study. Such multimedia message applications can be realized through a unified multimedia message application platform in the home network.

#### **7.3.3 Requirements for multimedia message**

In the home network, events that occur on devices can be heard or seen. These events include incoming call, incoming email, ordered messages received, washing finished by washers, heating finished by the microwave oven, and hot water ready in the bathtub. Such events can be heard from the TV set and IP acoustic devices, or seen from devices with displays, for example TV set, video door bell, PDA, and mobile phone, or from indicators on the devices. The user can hear voice, music and ring tones, mostly voice. Sometimes, the user can set music or ring tones for specific events. Things to be seen include characters, pictures, video and icons; they can include various effects or mainly character information, because characters are the most direct expression mode. Sometimes, the user can set special pictures, videos and icons for specific events.

A unified multimedia message application platform in the home network allows any device to send a message and displays the message on the designated or dedicated display or indication device.

To support the unified multimedia message application platform in the home network, a unified message format should be made. Each message should meet the following requirements:

- a) The message should contain the ID of the device that sends the message so that the message receiver can classify and match the message. The device ID should be unique inside the home network.
- b) The message should have a message ID so that the message receiver can retrieve the message. The message ID can be used with the device ID. Therefore, the message ID should be unique in the device that sends the message.
- c) The message should contain the type of the message content. Content types include text, picture, audio, voice and video.
- d) The message should contain the media that presents the message contents. Message contents should be able to be presented through indicators, display, loudspeaker and other media. According to the ways of obtaining information, messages can be presented by looking and hearing. The specific presentation mode is determined by the message receiver. The message sender should specify whether the message will be heard or seen. In case the content type is inconsistent with the presentation media, contents of the message might be converted, for example from text into voice.
- e) The message should be able to contain the duration of presentation of message contents.
- f) The message should contain the information about the length of message contents.
- g) The message should contain the content body. The format of the contents is determined by the contents; for example a video involves the resolution, frame rate and code format, which are determined by the content body.
- h) Notification in the form of a special message should be sent to the display device to delete the previously sent messages.

### 7.3.4 Multimedia message format

Table 2 describes a general multimedia message format that is recommended.

**Table 2 – Multimedia message format recommended**

| Device ID<br>(4 bytes) | Message ID<br>(2 bytes) | Message<br>media type<br>(1 byte) | Presentation<br>media type<br>(1 byte) | Keeping time<br>(4 bytes) | Length of<br>message body<br>(4 bytes) | Message body<br>(LMB bytes) |
|------------------------|-------------------------|-----------------------------------|--|---------------------------|--|-----------------------------|
|------------------------|-------------------------|-----------------------------------|--|---------------------------|--|-----------------------------|

- a) Device ID: The device ID is allocated by the multimedia application platform in a unified mode; it can be the IP address or MAC address of the device.
- b) Message ID: allocated by the device that sends the message.
- c) Message Media Type: indicates the content type of the message body; 0-no message body; 1-text; 2-picture; 3-audio; 4-voice; 5-video; 6-event code.
- d) Presentation Media Type: 0-unknown (that is, not designated); 1-looking; 2-hearing; 3-looking and hearing.
- e) Keeping Time: 0-delete the message designated by device ID + message ID; non 0-duration of keeping, in seconds; if the message is not explicitly deleted after the time is due, the device deletes it automatically. Because no message is to be displayed permanently, there is no need to define a value to indicate that the message will be permanently displayed.
- f) Length of Message Body: The range is 0–0xffffffff; if the value of the message content type is 0, this field is also 0.
- g) Message Body: message contents to be displayed. If the content type is voice, audio, picture or video, the format is determined by the message body. That is, the format of the message body is its storage format. The message receiver will process the message body as a file. Before the message body reaches the receiver, however, it may be converted through the intermediate device. If the message content type is event code (6), the message body is an event code represented by a decimal number. The event code is defined by the message

sender, while the corresponding information content is provided by the HMG. The message media type (MMT), presentation media type (PMT) and keeping time (KT) can be defined on the HMG; in the message, these contents can be omitted.

### 7.3.5 Send a message

The message sender can directly send the message to the destination device or the HMG. The HMG can select the destination device automatically or according to settings. Either the message sender or the HMG can use the unicast mode or broadcast mode to send the message. It is recommended that all devices in the home network send messages to the HMG, while the HMG forwards the messages to the display device. This can not only simplify service configurations, but also facilitate unified allocation of device IDs. Moreover, the HMG can convert the message body if necessary.

### 7.3.6 Delete a message

After the message sender is sure that the user has known the sent message, a special message can be sent to the message receiver, notifying the receiver to delete the previous message. The method is to assign the same message ID to the special message and set the keeping time to 0.

When the message sender is sure that the user has viewed the displayed message, the displayed message can be deleted and not displayed again.

### 7.3.7 Requirements for HMG

#### HMG requirements:

- a) The HMG should accept the registration of multimedia services by the application device.
- b) The HMG should support the receiving and forwarding of multimedia messages.
- c) The HMG should automatically detect the status of the application device and determine the message forwarding destination. It can also adopt the broadcast mode to forward messages.
- d) The HMG should match the media format of the message and the media processing capability of the message receiver. If necessary, it should convert the message body.

## 7.4 Devices management by HMG

### 7.4.1 Device status

In the chapter of directory service has given introduction to the presentation of the printer, surveillance cameras and home appliances in the directory. The HMG needs to know whether these devices are usable. Even when a device enters the hibernation mode due to power management and can be remotely woken up, the device is usable if the HMG can wake up the device.

#### HMG requirements:

The HMG should record the state of the device under its management. States include usable and unusable. Usable states include the online state and the hibernation mode, in which the device can be woken up by the HMG.

### 7.4.2 Connection status

If a media stream from the MS to the HMRec passes through the HMG, in the case of the MS fails or the connection between the MS and the HMG fails, the HMG can detect the failure. The HMRec can also detect the failure, as it cannot receive media data from the HMG, and terminate the connection with the HMG automatically or under user operation. In the case of the connection between the HMRec and the HMG is abnormal, if the HMG makes no special processing, it can continue obtaining media data from the MS, although it is insignificant to do so. Therefore, when detecting any exception on the connection between the HMG and the HMRec,



the HMG should actively terminate or suspend the transmission to the MS, to save processing capabilities and resources to serve other connections.

**HMG requirements:**

The HMG should be able to judge whether the transmission connection on itself is normal. When the transmission connection is abnormal, it should terminate or suspend the media service.

**7.4.3 Energy saving and power management**

The home media service center and player terminals, which store and manage media contents, might be in the hibernation mode to save energy when they are not in use. When the HMG accesses the media service center and player terminals, it should be able to wake up these devices. Therefore, the HMG should be able to support the power wake-up function. Wake-up messages can be saved on the HMG or queried by the HMG from other devices. (A specific solution is needed.)

In some special cases, the HMG might force a device to enter the hibernation mode. For example, if the HMG detects that the TV is on but there is no-one at home, or no-one near the room with the TV, it can turn off the TV. In this case, the TV actually enters a hibernation mode.

**HMG requirements:**

- a) The HMG should be able to wake up other devices in the hibernation mode.
- b) The HMG should be able to save the wake-up messages sent by other devices before entering the hibernation mode.
- c) The HMG should be able to query the wake-up messages from other devices.
- d) The HMG can send the dormancy command to other devices.

**7.5 Meters reading**

Meters reading is an important function in home automation. It can significantly reduce the operation expenditures of water, electricity and gas companies. This function should not add any burden on users. For each user, if meters of water, gas and electricity are located outdoors, the user normally does not pay attention to meter reading by water, electricity and gas companies. As a result, the user is not interested in automatic meter reading, unless there are some advantages; for example the user can query the consumptions of water, electricity and gas through PC, TV and mobile phone to know family expenditures.

Because the water, electricity and gas companies do not have operation networks, the deployment of automatic meter reading needs the cooperation among these companies and network operators. This can involve the settings of many parameters, for example the server addresses and the data report time.

If the metering data for water, electricity and gas is automatically reported by the home network, the payment information should also be sent to the user's home through the home network. The network should adopt a method to notify the user to query the payment information, for example displaying payment information on TV.

The HMG communicates with water, electricity and gas meters through wired or wireless mode in the home network system.

**HMG requirements:**

- a) The HMG should be able to support the three-meter reading function.
- b) The HMG should provide interfaces for communicating with water, electricity and gas meters.
- c) The HMG should provide the user query interface.

- d) The HMG should provide the configuration interface for some parameters, for example the URL of the data report server and the data report time.
- e) The HMG should provide an interface for receiving payment information, or query the payment information from the suppliers' servers.

## 7.6 Household appliance control

Home appliance control can be performed by means of directory service. If the HMG supports home appliance control, it is the home appliance control center and supporting other forms of control methods; for example, it can control home appliances by receiving the short messages sent by mobile phones, through voice interaction, or by logging on to the Web page.

### HMG requirements:

- a) The HMG should support control through short messages.
- b) The HMG should be able to receive short messages.
- c) The HMG should resolve the message content, authenticate the password, and resolve and execute the control command when the HMG receives a short message.
- d) The HMG should be able to send a message, notifying the command execution result to the number that sends the control command when the HMG receives a short message.
- e) The HMG should be able to support Web proxy and provide control Web pages for various home appliances.
- f) The HMG should support Web proxy and allow the user to log on to Web pages. It should provide user identity authentication and display the status and control results of home appliances through Web pages.

## 8 QoS

### 8.1 General


There might be multiple streams or multiple types of streams passing through the HMG. The HMG needs to distinguish the priority level of each HMRec and the level of the stream type. In case the HMG has a limited output bandwidth and a limited processing capability, it should guarantee the bandwidth requirement and quality of service (QoS) of devices of high priority.

The QoS is compatible with the UPnP QoS:3 which is defined in the ISO/IEC 29341 series. The HMG should support the UPnP QoS Device:3 service.

The following paragraph is the reference from UPnP QoS Architecture:3 document. Refer to UPnP QoS:3 for more details.

The QoS defines three services which are the QosPolicyHolder Service [QPH:3], the QosManager Service [QM:3] and the QosDevice Service [QD:3]. All three services are shown in Figure 20.



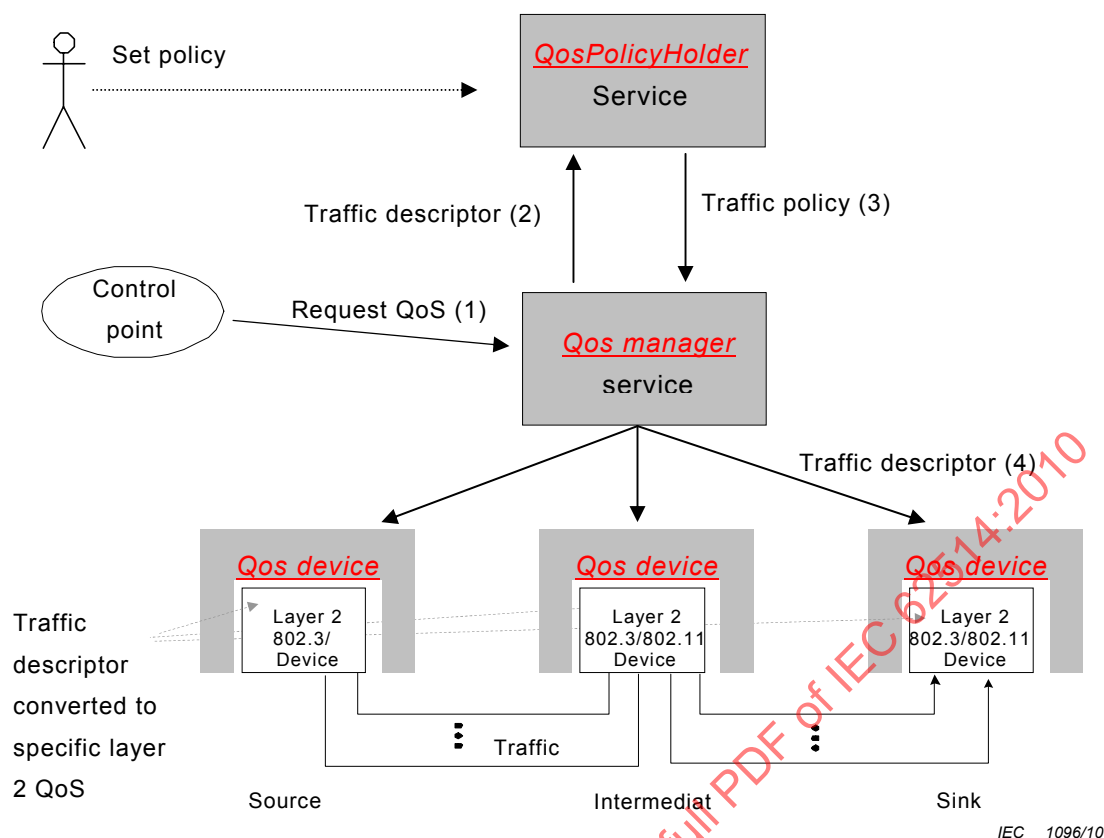

**Figure 20 – QoS Architecture overview**

Fundamentally, QoS manages the QoS for a traffic stream that flows between a source and a sink device. A traffic stream is viewed as a uni-directional flow from a source device to a sink device, possibly passing through intermediate devices. In the interaction described in this clause, a control point application is assumed to have the knowledge of source, sink and content characteristics to be streamed, along with the content's traffic specification (TSPEC). The control point constructs a TrafficDescriptor structure and requests a QoSManager service on the network to setup QoS for a traffic stream (step 1). The control point in the QoSManager Service (from hereon referred to as QoS Manager) requests the QoSPolicyHolder Service (step 2) to provide appropriate policy for the traffic stream described by the TrafficDescriptor structure (step 3). Based on this policy, the QoS Manager configures the QoSDevice Service(s) for establishing the QoS for the new traffic stream (step 4).

## 8.2 QoS requirements for HMG

- The HMG should support the UPnP QoS Device:3 service defined in the ISO/IEC 29341 series.
- The HMG should guarantee the bandwidth and QoS needed by the streaming media.
- The HMG should be able to implement priority control on transmission connections according to the device priority. For example, the telephone is of higher priority than the STB; the STB is of higher priority than the PC.
- The HMG should be able to implement priority control on transmission connections according to the content priority. For example, voice contents are of higher priority than audio contents; audio contents are of higher priority than video contents; video contents are of higher priority than pictures.
- The HMG should be able to reject new media service requests, or terminate connections of the lowest priority, in case the remaining bandwidth or processing capability is insufficient.

## 9 Security requirements

### 9.1 Requirements summary

- a) The HMG shall prevent the leakage of protected media contents and transmit the media contents only to the media service requester. The HMG shall not save the media contents locally.
- b) The HMG shall accept authentication by the HMRec.
- c) The HMG should be able to implement DRM authentication on the service requester as a procedure in the DRM.
- d) The HMG shall support encrypted transmission with the MS.
- e) The HMG shall support encrypted transmission with the HMRec.
- f) The HMG shall support multiple encryption algorithms.
- g) The HMG shall support multiple key management methods.
  - The HMG shall fully support multiple DRM and link protection methods, including the digital transmission contents protection over DTCP-IP: Digital Transmission Content Protection over Internet Protocol.
- h) The HMG should be able to replace the media service requester in accepting user identity authentication by the media sender.
- i) If the HMG replaces the HMRec in identity authentication, the HMG shall transmit related authentication data with the HMRec in the encrypted mode.
- j) The HMG shall not store related authentication data.
- k) The HMG shall support firmware and software upgrade initiated from WAN side or LAN side.
- l) The HMG shall check the firmware and software integrity before flashing procedure.
- m) The HMG shall provide a mechanism that guarantees the basic functionality can be recovered in the case of a failure of a firmware and software upgrade.
- n) The HMG should support WMS authentication through the RID allocated by the WMS. If the HMG receives a RID from the media service requester, this RID shall be included in the request when the HMG requests media contents from the WMS, or the HMG shall feed back the RID upon the query of the WMS.

Suppose that the HMG is allowed to disguise itself as a media service requester, and accepts device authentication by the media sender. It shall meet the following requirement:

The HMG shall authenticate the MS to prevent unauthorized devices from obtaining the user's account and password.

### 9.2 DRM

Some previous chapters have already talked about the digital right management (DRM). In general, the DRM is used for two purposes. One is to encrypt transmission to prevent contents from being intercepted. The other is to manage copies to prevent unauthorized copies. The purpose of preventing unauthorized copies is to restrict the propagation of media contents in the authorized range; unauthorized devices will not be able to obtain protected contents. When the HMG is involved, however, media contents are actually duplicated, which makes the situation more complicated. In this case, a new DRM system should be designed to add supports for media format conversion and transmission adaptation, or the existing DRM system can be expanded to support media format conversion and transmission adaptation.

#### HMG requirements:

- a) The HMG should prevent the leakage of protected media contents and transmit the media contents only to the media service requester. The HMG should not save the media contents locally.

- b) The HMG should be able to implement DRM authentication on the service requester as a procedure in the DRM.
- c) The HMG should accept authentication by the HMRec.

### 9.3 Key management

In addition to the encryption of transmitted contents by the DRM system, other contents not involving copyright might also be encrypted during transmission to avoid being intercepted; for example, in video communications, video transmitted is encrypted. The HMG can support the conversion service only if it gets a key and decrypts the media stream sent by the MS. Therefore, the HMG needs to get a key from the HMRec, or exchange the key and negotiate about the encryption method with the MS.

In case the media stream received by the HMG is encrypted, the HMG shall also encrypt the converted media stream before sending it to the HMRec. The HMG can adopt the same encryption method used between the HMRec and the MS to secretly transmit media streams to the HMRec. It can also adopt another encryption method.

#### HM requirement:

The HMG shall support key management.

### 9.4 Authentication

In the media conversion service method shown in Figure 4, the HMG wholly replaces the HMRec in requesting media contents from the MS. In addition to the DRM authentication, the MS might implement device authentication on the HMG to check whether the device is permitted to use services. The MS might also authenticate the user identity to make sure that the user is authorized. The authentication process might include the following.

- Device authentication: Some services might require device authentication. Only registered and authorized devices can use these services. The authentication process might require the device to own or provide the following information:
  - a) device authentication key;
  - b) device authentication certificate;
  - c) unique identifier of device.

The above information is bound with the device. If the HMG obtains such information and replaces the HMRec in accepting MS authentication, the HMG is actually disguised as the HMRec, which shall be prohibited. The only exception is that a device type is defined to support the disguise and new authentication process and device specifications are made in the new DRM system.

User identity authentication: Some services might need to authenticate the user's identity. The user can use a service only if he can provide the authorized account and password, and shall always use the service on the same device. The authentication process needs the following information:

- account name and password;
- a key used to encrypt account and password in transmission.

#### HM requirements:

- a) The HMG should be able to replace the media service requester to accept the user identity authentication by the media sender.
- b) The HMG shall accept authentication by the HMRec.
- c) The HMG shall encrypt related authentication data transmitted by the HMRec.
- d) The HMG shall not save related authentication data.

- e) The HMG shall prevent the leakage of protected media contents and transmit the media contents only to the media service requester. The HMG shall not save the media contents locally.

Suppose that the HMG is allowed to disguise itself as a media service requester, and accept device authentication by the media sender. It shall meet the following requirement.

- the HMG shall authenticate the MS to prevent unauthorized devices from obtaining the user's account and password.

## 9.5 Credibility of HMG

For the consideration of the DRM, the HMG shall be an authorized device. This means not only when replacing the HMRec in obtaining media from the media source, the HMG shall appear as an authorized device; it also means HMRec shall confirm authorization of the HMG. Therefore, the HMRec needs to authenticate the HMG. In encrypted transmission not involving the DRM, it shall be ensured that the HMG will not disclose the media contents. For such reasons, the HMRec needs to authenticate the HMG so that the HMG is credible.

### HMG requirement:

The HMG shall accept the authentication by the HMRec.

## 10 Performance requirements

- a) The HMG shall support simultaneous processing of at least two input media streams and two output media streams, including media stream transcoding, resolution adaptation, transport protocol adaptation, stream combination, stream division, duplication, redirection, encryption and decryption.
- b) If the HMG provides the video clip function, it shall be able to quickly respond to the coordinate switching command sent by the terminal.
- c) The HMG shall enter the energy-saving state when it does not provide services, for example, reducing the CPU rate.
- d) The HMG shall be able to work normally in the energy-saving state and receive service requests.
- e) The HMG shall recover from the energy-saving state once it receives a service request.

## 11 Requirements for interfaces and protocols of HMG

### 11.1 General

HMG is a logical device which can be combined into any physical device in home network as well as can be a separate physical device. HMG shall be in accordance with the requirements if HMG adopts the following optional interfaces.

## 11.2 WAN side interfaces

**Table 3 – WAN side interfaces**

| Optional interfaces | Requirements and options   |
|---------------------|--|
| ADSL and ADSL2+     | <ol style="list-style-type: none"> <li>1) The HMG should include an internal ADSL modem.</li> <li>2) The HMG should comply with requirements as specified in ANSI T1.413:1998 [1], ANSI T1.413a-2001 [2] and ITU 992.1 [3] for Annex A or Annex B depending upon regional requirements</li> <li>3) The HMG should support FDM-mode per ANSI T1.413 [1], and ITU-T G.992.1 [3].</li> <li>4) The HMG should comply with ITU G.992.3 [4], (ADSL2) and ITU G.992.5 [5], (ADSL2+).</li> <li>5) The HMG should comply with ITU G.992.3 [4], Annex L (RE-ADSL2).</li> </ol>   |
| VDSL2               | <ol style="list-style-type: none"> <li>1) The HMG should include an internal VDSL2 modem.</li> <li>2) The HMG should be compliant with ITU-T G.993.2 [6].</li> <li>3) The HMG should include support for the following application reference models from ITU-T G.993.2 [6].: <ul style="list-style-type: none"> <li>– G.993.2 [6].section 5.4.2, Data with POTS service</li> <li>– G.993.2 [6].section 5.4.1, Data service (no POTS or SDN)</li> </ul> </li> </ol>   |
| Ethernet (WAN)      | <ol style="list-style-type: none"> <li>1) If the HMG supports an optional WAN Ethernet port, it should support 10BASE-T/100BASE-T presented on an RJ-45 jack.</li> <li>2) If the HMG supports both a WAN Ethernet port in addition to another physical WAN link type (e.g., ADSL, VDSL2, ONT function, etc.), simultaneous use of both WAN ports should NOT be supported.</li> <li>3) Any Ethernet port used as a WAN link should be non-blocking for LAN to LAN and LAN to WAN traffic flows. This may occur in some implementations that utilize one port of a multi-port Ethernet switch for WAN use, sometimes as a result requiring LAN to LAN traffic to be forwarded and processed through the device CPU.</li> </ol> |
| GPON                | <ol style="list-style-type: none"> <li>1) The HMG should include an integrated GPON ONT interface.</li> <li>2) The HMG should comply with all mandatory requirements for the ONT as specified in ITU G.984.1 [7] (General Characteristics), G.984.2 [8] Amd 1 (Physical Media Dependent Layer), G.984.3 [9] (Transmission Convergence Layer) and G.984.4 [10] (ONT Management and Control Interface).</li> <li>3) The HMG should support requirements contained in Table 3.2 of ITU-T G.984.2:2003 [8] Amd1 (optical budget, source type, transmitter range, mean launched power min/max, extinction ratio, etc.).</li> </ol>  |

### 11.3 LAN side interfaces

**Table 4 – LAN side interfaces**

| Optional interfaces | Requirements and options   |
|---------------------|--|
| ETH                 | <ol style="list-style-type: none"> <li>1) The HMG shall have at least one 10/100BASE-T Ethernet port (RJ-45 jack) for connecting it to the home data network.</li> <li>2) The HMG shall be able to support both 10BASE-T and 100BASE-T with auto negotiate for speed and duplex on a port-by-port basis according to IEEE 802.3u.</li> <li>3) The Ethernet LAN interface should allow for adjusting the inter-frame and collision back off timers so that traffic marked with Ethernet priority (as defined in IEEE 802.1D) can get statistically better treatment on broadcast LAN Segments.</li> </ol> |
| G.hn                | <ol style="list-style-type: none"> <li>1) The HMG should be compliant with G.hn Physical Layer (recommendation ITU-T G.9960 specification).</li> <li>2) The HMG should be compliant with G.hn Data Link Layer (recommendation ITU-T G.9961 specification).</li> </ol>  |
| Wireless            | <ol style="list-style-type: none"> <li>1) The HMG shall be compliant with the IEEE 802.11 b/g specifications.</li> <li>2) The HMG shall be Wi-Fi CERTIFIED™ for all applicable IEEE 802.11 standards.</li> <li>3) The HMG shall be Wi-Fi CERTIFIED™ for WPA2-Personal.</li> <li>4) The HMG shall support setting the Ethernet VLAN identifier, defined in IEEE 802.1Q, of incoming wireless traffic to a configurable value based on SSID.</li> </ol>  |

IECNORM.COM : Click to view the full PDF of IEC 62514:2010

## **Annex A** (informative)

### **Application scenario**

#### **A.1 Entertainment**

##### **A.1.1 Scenario 1: Playback**

###### **Description:**

A home network might contain one or multiple media servers, which support a lot of media contents. Other user terminals, for example, the STBs, mobile phones and digital cameras, might also contain some media contents. Once these devices are on, the user can access the resources and select a media content to be played on the media player.

###### **Precondition:**

Media contents are stored on the media server and some other devices.

There is at least one media player that can play media contents.

###### **Application process 1:**

The user operates the media player, which displays all media contents found in the home network. The user selects some contents and starts playing the contents.

###### **Application process 2:**

The user operates a control device, for example a remote control or a PC, which displays all media contents found in the home network. The user selects some contents. The control device also displays usable players in the home network. The user selects a player and starts playing the selected media contents.

###### **Functional requirements:**

- a) The HMG can provide the directory service to collect all media contents in the home network, mainly contents on media servers.
- b) The HMG can provide the media conversion service when necessary, so that media formats not supported by a player can be played on the player.
- c) The HMG can provide the transport protocol translation service when necessary, so that the player can play the selected media content, in the case of the player and the device that provides media contents use different transport protocols.
- d) The HMG should support the conversion of the control protocol when providing the transport protocol translation service.
- e) Devices containing media contents should actively report their contents to the HMG, or accept queries from the HMG.

##### **A.1.2 Scenario 2: VOD**

###### **Description:**

The user can play media programs on demand from the public network through the TV set, PC and various hand-held devices.

**Precondition:**

The server in the WAN might authenticate the identities of the user and devices. The contents provided might be protected by the digital rights management (DRM) technology.

**Application process 1:**

The user logs on to the media server through the STB. The program list is displayed on the TV set. The user selects a program, and the program is smoothly played.

**Application process 2:**

The user surfs the Internet through the PC. On a Web page, the user finds a video media hyperlink. The user clicks the hyperlink and the video is smoothly played.

**Functional requirements:**

- a) The HMG should provide the media conversion service, so that the player can play media formats it does not support.
- b) The HMG should be able to meet the DRM requirement.

**A.1.3 Scenario 3: Change player**

**Description:**

When the user watches a program on demand on a device, he wants to transfer the program to another device and continues watching.

**Precondition:**

The user owns multiple players, all of which are connected to the home network.

**Application process:**

The user watches a movie on demand on the PC in the study.

After watching for a while, the user finds the movie very interesting and wants to transfer the program to the TV set in the sitting room. The user suspends the program and selects the TV set in the sitting room from the device list. The program is transferred to the TV set in the sitting room.

The user comes to the sitting room and turns on the TV set. He switches to the VOD channel. The TV screen shows the last picture of the program and a prompt, "Please press **OK** to continue." The user presses **OK** on the remote control. The program is played from the previous break point.

**Functional requirements:**

- a) The HMG can support the media stream redirection function and support program transfer.
- b) Even if the destination device is not on, the program transfer can succeed.
- c) After the program is successfully transferred, the destination device should display the last picture at program pause.
- d) The user can press the prompted key on the destination device to continue playing the program.
- e) If the destination device does not support the original media format, the HMG should provide the conversion service.



- f) If program transfer is supported through the HMG, the HMG should meet the DRM requirement.

#### **A.1.4 Scenario 4: Multicast**

##### **Description:**

While watching TV programs on demand or programs stored in the home network, the user wants to output the currently played program on multiple player terminals, so that family members can watch the same program in different rooms or on various types of devices.

##### **Precondition:**

Related players are connected to the home network so that they can interwork with one another.

##### **Application process 1:**

The user orders a program.

The user selects **Multicast** from the menu or through the functional key of the remote control.

The list of all players is displayed on the TV set.

The user selects multiple players that are used for simultaneous playback.

The user presses **OK**. The current program on demand is played on all selected TV sets.

##### **Application process 2:**

The user views the VOD or playback program being played in the home network through the player. The user selects the program being played and starts playing the program on his device.

##### **Functional requirements:**

- a) Through the HMG, a terminal device can join the multicast group of a program being played.
- b) The HMG should be able to accept a terminal device passive joining of a multicast group
- c) The HMG should be able to accept a terminal device active joining of a multicast group .
- d) For a terminal device passive joining a multicast group, the joining operation should succeed even if the device is not on.
- e) A terminal device passive joining a multicast group will play the multicast contents once it is turned on.
- f) When the HMG forwards media contents to multiple terminals, it should convert media streams in orientation to the capabilities of different media receivers, if necessary.
- g) The HMG can accept the **Stop Playback** request from any terminal, which means leaving the multicast group.
- h) The HMG should permit trick mode operations by any terminal in the multicast group.
- i) The HMG should support multicast under the permission of the DRM.