

INTERNATIONAL  
STANDARD

ISO/IEC  
14496-2

First edition  
1999-12-01

---

---

**Information technology — Coding of  
audio-visual objects —**

**Part 2:  
Visual**

*Technologies de l'information — Codage des objets audiovisuels —  
Partie 2: Codage visuel*

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999



Reference number  
ISO/IEC 14496-2:1999(E)

© ISO/IEC 1999

## Contents

1	<b>Scope</b> .....	1
2	<b>Normative references</b> .....	1
3	<b>Definitions</b> .....	2
4	<b>Abbreviations and symbols</b> .....	8
4.1	<b>Arithmetic operators</b> .....	9
4.2	<b>Logical operators</b> .....	9
4.3	<b>Relational operators</b> .....	9
4.4	<b>Bitwise operators</b> .....	10
4.5	<b>Conditional operators</b> .....	10
4.6	<b>Assignment</b> .....	10
4.7	<b>Mnemonics</b> .....	10
4.8	<b>Constants</b> .....	10
5	<b>Conventions</b> .....	10
5.1	<b>Method of describing bitstream syntax</b> .....	10
5.2	<b>Definition of functions</b> .....	12
5.2.1	<b>Definition of next_bits() function</b> .....	12
5.2.2	<b>Definition of bytealigned() function</b> .....	12
5.2.3	<b>Definition of nextbits_bytealigned() function</b> .....	12
5.2.4	<b>Definition of next_start_code() function</b> .....	12
5.2.5	<b>Definition of next_resync_marker() function</b> .....	12
5.2.6	<b>Definition of transparent_mb() function</b> .....	13
5.2.7	<b>Definition of transparent_block() function</b> .....	13

5.3	Reserved, forbidden and marker_bit.....	13
5.4	Arithmetic precision .....	13
6	Visual bitstream syntax and semantics .....	13
6.1	Structure of coded visual data.....	13
6.1.1	Visual object sequence .....	14
6.1.2	Visual object .....	14
6.1.3	Video object.....	14
6.1.4	Mesh object.....	19
6.1.5	Face object.....	20
6.2	Visual bitstream syntax .....	24
6.2.1	Start codes.....	24
6.2.2	Visual Object Sequence and Visual Object .....	27
6.2.3	Video Object Layer.....	29
6.2.4	Group of Video Object Plane .....	34
6.2.5	Video Object Plane and Video Plane with Short Header .....	34
6.2.6	Macroblock .....	48
6.2.7	Block.....	54
6.2.8	Still Texture Object .....	55
6.2.9	Mesh Object.....	64
6.2.10	Face Object.....	67
6.3	Visual bitstream semantics .....	77
6.3.1	Semantic rules for higher syntactic structures.....	77
6.3.2	Visual Object Sequence and Visual Object .....	77
6.3.3	Video Object Layer.....	83
6.3.4	Group of Video Object Plane .....	91
6.3.5	Video Object Plane and Video Plane with Short Header .....	91
6.3.6	Macroblock related.....	101
6.3.7	Block related.....	104
6.3.8	Still texture object .....	104
6.3.9	Mesh object.....	109
6.3.10	Face object.....	112

7	The visual decoding process .....	117
7.1	Video decoding process .....	117
7.2	Higher syntactic structures .....	118
7.3	VOP reconstruction .....	118
7.4	Texture decoding .....	119
7.4.1	Variable length decoding .....	119
7.4.2	Inverse scan .....	120
7.4.3	Intra dc and ac prediction for intra macroblocks .....	121
7.4.4	Inverse quantisation .....	123
7.4.5	Inverse DCT .....	126
7.5	Shape decoding .....	126
7.5.1	Higher syntactic structures .....	127
7.5.2	Macroblock decoding .....	127
7.5.3	Arithmetic decoding .....	136
7.5.4	Grayscale Shape Decoding .....	138
7.6	Motion compensation decoding .....	140
7.6.1	Padding process .....	141
7.6.2	Half sample interpolation .....	144
7.6.3	General motion vector decoding process .....	144
7.6.4	Unrestricted motion compensation .....	146
7.6.5	Vector decoding processing and motion-compensation in progressive P-VOP .....	146
7.6.6	Overlapped motion compensation .....	148
7.6.7	Temporal prediction structure .....	150
7.6.8	Vector decoding process of non-scalable progressive B-VOPs .....	150
7.6.9	Motion compensation in non-scalable progressive B-VOPs .....	151
7.7	Interlaced video decoding .....	155
7.7.1	Field DCT and DC and AC Prediction .....	155
7.7.2	Motion compensation .....	155
7.8	Sprite decoding .....	162
7.8.1	Higher syntactic structures .....	163
7.8.2	Sprite Reconstruction .....	163

7.8.3	Low-latency sprite reconstruction .....	164
7.8.4	Sprite reference point decoding .....	165
7.8.5	Warping .....	165
7.8.6	Sample reconstruction .....	167
7.9	Generalized scalable decoding .....	167
7.9.1	Temporal scalability .....	169
7.9.2	Spatial scalability .....	172
7.10	Still texture object decoding .....	175
7.10.1	Decoding of the DC subband .....	175
7.10.2	ZeroTree Decoding of the Higher Bands .....	176
7.10.3	Inverse Quantization .....	181
7.11	Mesh object decoding .....	188
7.11.1	Mesh geometry decoding .....	188
7.11.2	Decoding of mesh motion vectors .....	191
7.12	Face object decoding .....	193
7.12.1	Frame based face object decoding .....	193
7.12.2	DCT based face object decoding .....	194
7.12.3	Decoding of the viseme parameter fap 1 .....	195
7.12.4	Decoding of the viseme parameter fap 2 .....	196
7.12.5	Fap masking .....	196
7.13	Output of the decoding process .....	196
7.13.1	Video data .....	197
7.13.2	2D Mesh data .....	197
7.13.3	Face animation parameter data .....	197
8	Visual-Systems Composition Issues .....	197
8.1	Temporal Scalability Composition .....	197
8.2	Sprite Composition .....	198
8.3	Mesh Object Composition .....	199
9	Profiles and Levels .....	199
9.1	Visual Object Types .....	200
9.2	Visual Profiles .....	202
9.3	Visual Profiles@Levels .....	202

9.3.1	Natural Visual .....	202
9.3.2	Synthetic Visual.....	202
9.3.3	Synthetic/Natural Hybrid Visual.....	203
Annex A (normative) Coding transforms .....		205
A.1	Discrete cosine transform for video texture.....	205
A.2	Discrete wavelet transform for still texture .....	205
A.2.1	Adding the mean .....	205
A.2.2	Wavelet filter .....	206
A.2.3	Symmetric extension .....	206
A.2.4	Decomposition level .....	207
A.2.5	Shape adaptive wavelet filtering and symmetric extension .....	207
Annex B (normative) Variable length codes and arithmetic decoding .....		209
B.1	Variable length codes .....	209
B.1.1	Macroblock type .....	209
B.1.2	Macroblock pattern .....	210
B.1.3	Motion vector.....	212
B.1.4	DCT coefficients .....	214
B.1.5	Shape Coding .....	227
B.1.6	Sprite Coding.....	233
B.1.7	DCT based facial object decoding.....	234
B.2	Arithmetic Decoding.....	246
B.2.1	Arithmetic decoding for still texture object .....	246
B.2.2	Arithmetic decoding for shape decoding .....	251
B.2.3	Face Object Decoding.....	254
Annex C (normative) Face object decoding tables and definitions .....		256
Annex D (normative) Video buffering verifier .....		269
D.1	Introduction .....	269
D.2	Video Rate Buffer Model Definition .....	269
D.3	Comparison between ISO/IEC 14496-2 VBV and the ISO/IEC 13818-2 VBV (Informative).....	272
D.4	Video Complexity Model Definition .....	273
D.5	Video Reference Memory Model Definition .....	274

D.6	Interaction between VBV, VCV and VMV (informative).....	274
D.7	Video Presentation Model Definition (informative).....	275
Annex E (informative) Features supported by the algorithm.....		277
E.1	Error resilience .....	277
E.1.1	Resynchronization .....	277
E.1.2	Data Partitioning .....	278
E.1.3	Reversible VLC .....	278
E.1.4	Decoder Operation.....	279
E.1.5	Adaptive Intra Refresh (AIR) Method .....	282
E.2	Complexity Estimation .....	284
E.3	Resynchronization in Case of Unknown Video Header Format .....	284
Annex F (informative) Preprocessing and postprocessing .....		286
F.1	Segmentation for VOP Generation .....	286
F.1.1	Introduction .....	286
F.1.2	Description of a combined temporal and spatial segmentation framework .....	286
F.1.3	References .....	288
F.2	Bounding Rectangle of VOP Formation .....	289
F.3	Postprocessing for Coding Noise Reduction .....	290
F.3.1	Deblocking filter .....	290
F.3.2	Deringing filter.....	292
F.3.3	Further issues.....	294
F.4	Chrominance Decimation and Interpolation Filtering for Interlaced Object Coding.....	294
Annex G (normative) Profile and level indication and restrictions .....		296
Annex H (informative) Patent statements .....		298
H.1	Patent statements .....	298
Annex I (informative) Bibliography .....		300
Annex J (normative) View dependent object scalability .....		301
J.1	Introduction .....	301
J.2	Decoding Process of a View-Dependent Object .....	301
J.2.1	General Decoding Scheme.....	301
J.2.2	Computation of the View-Dependent Scalability parameters.....	303
J.2.3	VD mask computation .....	304

J.2.4	Differential mask computation.....	305
J.2.5	DCT coefficients decoding .....	305
J.2.6	Texture update.....	305
J.2.7	IDCT .....	306
<b>Annex K (normative) Decoder configuration information .....</b>		<b>307</b>
K.1	Introduction .....	307
K.2	Description of the set up of a visual decoder (informative).....	307
K.2.1	Processing of decoder configuration information.....	308
K.3	Specification of decoder configuration information.....	309
K.3.1	VideoObject .....	309
K.3.2	StillTextureObject.....	309
K.3.3	MeshObject .....	309
K.3.4	FaceObject .....	310
<b>Annex L (informative) Rate control.....</b>		<b>311</b>
L.1	Frame Rate Control .....	311
L.1.1	Introduction .....	311
L.1.2	Description.....	311
L.1.3	Summary .....	314
L.2	Multiple Video Object Rate Control .....	314
L.2.1	Initialization.....	315
L.2.2	Quantization Level Calculation for I-frame and first P-frame .....	315
L.2.3	Update Rate-Distortion Model.....	317
L.2.4	Post-Frameskip Control.....	317
L.3	Macroblock Rate Control.....	319
L.3.1	Rate-Distortion Model .....	319
L.3.2	Target Number of Bits for Each Macroblock .....	319
L.3.3	Macroblock Rate Control.....	320
<b>Annex M (informative) Binary shape coding .....</b>		<b>322</b>
M.1	Introduction .....	322
M.2	Context-Based Arithmetic Shape Coding.....	322
M.2.1	Intra Mode .....	322

<b>M.2.2</b>	<b>Inter Mode .....</b>	<b>323</b>
<b>M.3</b>	<b>Texture Coding of Boundary Blocks.....</b>	<b>324</b>
<b>M.4</b>	<b>Encoder Architecture.....</b>	<b>324</b>
<b>M.5</b>	<b>Encoding Guidelines .....</b>	<b>325</b>
<b>M.5.1</b>	<b>Lossy Shape Coding.....</b>	<b>325</b>
<b>M.5.2</b>	<b>Coding Mode Selection .....</b>	<b>326</b>
<b>M.6</b>	<b>Conclusions.....</b>	<b>326</b>
<b>M.7</b>	<b>References.....</b>	<b>326</b>
<b>Annex N (normative) Visual profiles@levels</b>		<b>328</b>

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 14496-2 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

ISO/IEC 14496 consists of the following parts, under the general title *Information technology — Coding of audio-visual objects*:

- *Part 1: Systems*
- *Part 2: Visual*
- *Part 3: Audio*
- *Part 4: Conformance testing*
- *Part 5: Reference testing*
- *Part 6: Delivery Multimedia Integration Framework (DMIF)*

Annexes A to D, G, J, K and N form a normative part of this part of ISO/IEC 14496. Annexes E, F, H, I, L and M are for information only.

## Introduction

### Purpose

This part of ISO/IEC 14496 was developed in response to the growing need for a coding method that can facilitate access to visual objects in natural and synthetic moving pictures and associated natural or synthetic sound for various applications such as digital storage media, internet, various forms of wired or wireless communication etc. The use of ISO/IEC 14496 means that motion video can be manipulated as a form of computer data and can be stored on various storage media, transmitted and received over existing and future networks and distributed on existing and future broadcast channels.

### Application

The applications of ISO/IEC 14496 cover, but are not limited to, such areas as listed below:

IMM	Internet Multimedia
IVG	Interactive Video Games
IPC	Interpersonal Communications (videoconferencing, videophone, etc.)
ISM	Interactive Storage Media (optical disks, etc.)
MMM	Multimedia Mailing
NDB	Networked Database Services (via ATM, etc.)
RES	Remote Emergency Systems
RVS	Remote Video Surveillance
WMM	Wireless Multimedia

### Profiles and levels

ISO/IEC 14496 is intended to be generic in the sense that it serves a wide range of applications, bitrates, resolutions, qualities and services. Furthermore, it allows a number of modes of coding of both natural and synthetic video in a manner facilitating access to individual objects in images or video, referred to as content based access. Applications should cover, among other things, digital storage media, content based image and video databases, internet video, interpersonal video communications, wireless video etc. In the course of creating ISO/IEC 14496, various requirements from typical applications have been considered, necessary algorithmic elements have been developed, and they have been integrated into a single syntax. Hence ISO/IEC 14496 will facilitate the bitstream interchange among different applications.

This part of ISO/IEC 14496 includes one or more complete decoding algorithms as well as a set of decoding tools. Moreover, the various tools of this part of ISO/IEC 14496 as well as that derived from ISO/IEC 13818-2 can be combined to form other decoding algorithms. Considering the practicality of implementing the full syntax of ISO/IEC 14496-2, however, a limited number of subsets of the syntax are also stipulated by means of "profile" and "level".

A "profile" is a defined subset of the entire bitstream syntax that is defined by this part of ISO/IEC 14496. Within the bounds imposed by the syntax of a given profile it is still possible to require a very large variation in the performance of encoders and decoders depending upon the values taken by parameters in the bitstream.

In order to deal with this problem "levels" are defined within each profile. A level is a defined set of constraints imposed on parameters in the bitstream. These constraints may be simple limits on numbers. Alternatively they may take the form of constraints on arithmetic combinations of the parameters.

## Object based coding syntax

### Video object

A *video object* in a scene is an entity that a user is allowed to access (seek, browse) and manipulate (cut and paste). The instances of video objects at a given time are called *video object planes* (VOPs). The encoding process generates a coded representation of a VOP as well as composition information necessary for display. Further, at the decoder, a user may interact with and modify the composition process as needed.

The full syntax allows coding of rectangular as well as arbitrarily shaped video objects in a scene. Furthermore, the syntax supports both nonscalable coding and scalable coding. Thus it becomes possible to handle normal scalabilities as well as object based scalabilities. The scalability syntax enables the reconstruction of useful video from pieces of a total bitstream. This is achieved by structuring the total bitstream in two or more layers, starting from a standalone base layer and adding a number of enhancement layers. The base layer can be coded using a non-scalable syntax, or in the case of picture based coding, even using a syntax of a different video coding standard.

To ensure the ability to access individual objects, it is necessary to achieve a coded representation of its shape. A natural video object consists of a sequence of 2D representations (at different points in time) referred to here as VOPs. For efficient coding of VOPs, both temporal redundancies as well as spatial redundancies are exploited. Thus a coded representation of a VOP includes representation of its shape, its motion and its texture.

### Face object

A 3D (or 2D) *face object* is a representation of the human face that is structured for portraying the visual manifestations of speech and facial expressions adequate to achieve visual speech intelligibility and the recognition of the mood of the speaker. A face object is animated by a stream of *face animation parameters* (FAP) encoded for low-bandwidth transmission in broadcast (one-to-many) or dedicated interactive (point-to-point) communications. The FAPs manipulate key feature control points in a mesh model of the face to produce animated visemes for the mouth (lips, tongue, teeth), as well as animation of the head and facial features like the eyes. FAPs are quantized with careful consideration for the limited movements of facial features, and then prediction errors are calculated and coded arithmetically. The remote manipulation of a face model in a terminal with FAPs can accomplish lifelike visual scenes of the speaker in real-time without sending pictorial or video details of face imagery every frame.

A simple streaming connection can be made to a decoding terminal that animates a default face model. A more complex session can initialize a custom face in a more capable terminal by downloading *face definition parameters* (FDP) from the encoder. Thus specific background images, facial textures, and head geometry can be portrayed. The composition of specific backgrounds, face 2D/3D meshes, texture attribution of the mesh, etc. is described in ISO/IEC 14496-1. The FAP stream for a given user can be generated at the user's terminal from video/audio, or from text-to-speech. FAPs can be encoded at bitrates up to 2-3kbit/s at necessary speech rates. Optional temporal DCT coding provides further compression efficiency in exchange for delay. Using the facilities of ISO/IEC 14496-1, a composition of the animated face model and synchronized, coded speech audio (low-bitrate speech coder or text-to-speech) can provide an integrated low-bandwidth audio/visual speaker for broadcast applications or interactive conversation.

Limited scalability is supported. Face animation achieves its efficiency by employing very concise motion animation controls in the channel, while relying on a suitably equipped terminal for rendering of moving 2D/3D faces with non-normative models held in local memory. Models stored and updated for rendering in the terminal can be simple or complex. To support speech intelligibility, the normative specification of FAPs intends for their selective or complete use as signaled by the encoder. A masking scheme provides for selective transmission of FAPs according to what parts of the face are naturally active from moment to moment. A further control in the FAP stream allows face animation to be suspended while leaving face features in the terminal in a defined quiescent state for higher overall efficiency during multi-point connections.

The Face Animation specification is defined in ISO/IEC 14496-1 and this part of ISO/IEC 14496. This clause is intended to facilitate finding various parts of specification. As a rule of thumb, FAP specification is found in the part 2, and FDP specification in the part 1. However, this is not a strict rule. For an overview of FAPs and their interpretation, read subclauses "6.1.5.2 Facial animation parameter set", "6.1.5.3 Facial animation parameter units", "6.1.5.4 Description of a neutral face" as well as the Table C-1. The viseme parameter is documented in subclause "7.12.3 Decoding of the viseme parameter fap 1" and the Table C-5 in annex C. The expression parameter is

documented in subclause “7.12.4 Decoding of the expression parameter fap 2” and the Table C-3. FAP bitstream syntax is found in subclauses “6.2.10 Face Object”, semantics in “6.3.10 Face Object”, and subclause “7.12 Face object decoding” explains in more detail the FAP decoding process. FAP masking and interpolation is explained in subclauses “6.3.11.1 Face Object Plane”, “7.12.1.1 Decoding of faps”, “7.12.5 Fap masking”. The FIT interpolation scheme is documented in subclause “7.2.5.3.2.4 FIT” of ISO/IEC 14496-1. The FDPs and their interpretation are documented in subclause “7.2.5.3.2.6 FDP” of ISO/IEC 14496-1. In particular, the FDP feature points are documented in the Figure C-1.

## Mesh object

A 2D *mesh object* is a representation of a 2D deformable geometric shape, with which synthetic video objects may be created during a composition process at the decoder, by spatially piece-wise warping of existing video object planes or still texture objects. The instances of mesh objects at a given time are called *mesh object planes* (mops). The geometry of mesh object planes is coded losslessly. Temporally and spatially predictive techniques and variable length coding are used to compress 2D mesh geometry. The coded representation of a 2D mesh object includes representation of its geometry and motion.

### Overview of the object based nonscalable syntax

The coded representation defined in the non-scalable syntax achieves a high compression ratio while preserving good image quality. Further, when access to individual objects is desired, the shape of objects also needs to be coded, and depending on the bandwidth available, the shape information can be coded lossy or losslessly.

The compression algorithm employed for texture data is not lossless as the exact sample values are not preserved during coding. Obtaining good image quality at the bitrates of interest demands very high compression, which is not achievable with intra coding alone. The need for random access, however, is best satisfied with pure intra coding. The choice of the techniques is based on the need to balance a high image quality and compression ratio with the requirement to make random access to the coded bitstream.

A number of techniques are used to achieve high compression. The algorithm first uses block-based motion compensation to reduce the temporal redundancy. Motion compensation is used both for causal prediction of the current VOP from a previous VOP, and for non-causal, interpolative prediction from past and future VOPs. Motion vectors are defined for each 16-sample by 16-line region of a VOP or 8-sample by 8-line region of a VOP as required. The prediction error, is further compressed using the discrete cosine transform (DCT) to remove spatial correlation before it is quantised in an irreversible process that discards the less important information. Finally, the shape information, motion vectors and the quantised DCT information, are encoded using variable length codes.

### Temporal processing

Because of the conflicting requirements of random access to and highly efficient compression, three main VOP types are defined. Intra coded VOPs (I-VOPs) are coded without reference to other pictures. They provide access points to the coded sequence where decoding can begin, but are coded with only moderate compression. Predictive coded VOPs (P-VOPs) are coded more efficiently using motion compensated prediction from a past intra or predictive coded VOPs and are generally used as a reference for further prediction. Bidirectionally-predictive coded VOPs (B-VOPs) provide the highest degree of compression but require both past and future reference VOPs for motion compensation. Bidirectionally-predictive coded VOPs are never used as references for prediction (except in the case that the resulting VOP is used as a reference for scalable enhancement layer). The organisation of the three VOP types in a sequence is very flexible. The choice is left to the encoder and will depend on the requirements of the application.

### Coding of Shapes

In natural video scenes, VOPs are generated by segmentation of the scene according to some semantic meaning. For such scenes, the shape information is thus binary (binary shape). Shape information is also referred to as alpha plane. The binary alpha plane is coded on a macroblock basis by a coder which uses the context information, motion compensation and arithmetic coding.

For coding of shape of a VOP, a bounding rectangle is first created and is extended to multiples of  $16 \times 16$  blocks with extended alpha samples set to zero. Shape coding is then initiated on a  $16 \times 16$  block basis; these blocks are also referred to as binary alpha blocks.

## Motion representation - macroblocks

The choice of  $16 \times 16$  blocks (referred to as macroblocks) for the motion-compensation unit is a result of the trade-off between the coding gain provided by using motion information and the overhead needed to represent it. Each macroblock can further be subdivided to  $8 \times 8$  blocks for motion estimation and compensation depending on the overhead that can be afforded.

Depending on the type of the macroblock, motion vector information and other side information is encoded with the compressed prediction error in each macroblock. The motion vectors are differenced with respect to a prediction value and coded using variable length codes. The maximum length of the motion vectors allowed is decided at the encoder. It is the responsibility of the encoder to calculate appropriate motion vectors. The specification does not specify how this should be done.

## Spatial redundancy reduction

Both source VOPs and prediction errors VOPs have significant spatial redundancy. This part of ISO/IEC 14496 uses a block-based DCT method with optional visually weighted quantisation, and run-length coding. After motion compensated prediction or interpolation, the resulting prediction error is split into  $8 \times 8$  blocks. These are transformed into the DCT domain where they can be weighted before being quantised. After quantisation many of the DCT coefficients are zero in value and so two-dimensional run-length and variable length coding is used to encode the remaining DCT coefficients efficiently.

## Chrominance formats

This part of ISO/IEC 14496 currently supports the 4:2:0 chrominance format.

## Pixel depth

This part of ISO/IEC 14496 supports pixel depths between 4 and 12 bits in luminance and chrominance planes.

## Generalized scalability

The scalability tools in this part of ISO/IEC 14496 are designed to support applications beyond that supported by single layer video. The major applications of scalability include internet video, wireless video, multi-quality video services, video database browsing etc. In some of these applications, either normal scalabilities on picture basis such as those in ISO/IEC 13818-2 may be employed or object based scalabilities may be necessary; both categories of scalability are enabled by this part of ISO/IEC 14496.

Although a simple solution to scalable video is the simulcast technique that is based on transmission/storage of multiple independently coded reproductions of video, a more efficient alternative is scalable video coding, in which the bandwidth allocated to a given reproduction of video can be partially re-utilised in coding of the next reproduction of video. In scalable video coding, it is assumed that given a coded bitstream, decoders of various complexities can decode and display appropriate reproductions of coded video. A scalable video encoder is likely to have increased complexity when compared to a single layer encoder. However, this part of ISO/IEC 14496 provides several different forms of scalabilities that address non-overlapping applications with corresponding complexities.

The basic scalability tools offered are temporal scalability and spatial scalability. Moreover, combinations of these basic scalability tools are also supported and are referred to as hybrid scalability. In the case of basic scalability, two layers of video referred to as the lower layer and the enhancement layer are allowed, whereas in hybrid scalability up to four layers are supported.

## Object based Temporal scalability

Temporal scalability is a tool intended for use in a range of diverse video applications from video databases, internet video, wireless video and multiview/stereoscopic coding of video. Furthermore, it may also provide a migration path from current lower temporal resolution video systems to higher temporal resolution systems of the future.

Temporal scalability involves partitioning of VOPs into layers, where the lower layer is coded by itself to provide the basic temporal rate and the enhancement layer is coded with temporal prediction with respect to the lower layer. These layers when decoded and temporally multiplexed yield full temporal resolution. The lower temporal resolution systems may only decode the lower layer to provide basic temporal resolution whereas enhanced systems of the

future may support both layers. Furthermore, temporal scalability has use in bandwidth constrained networked applications where adaptation to frequent changes in allowed throughput are necessary. An additional advantage of temporal scalability is its ability to provide resilience to transmission errors as the more important data of the lower layer can be sent over a channel with better error performance, whereas the less critical enhancement layer can be sent over a channel with poor error performance. Object based temporal scalability can also be employed to allow graceful control of picture quality by controlling the temporal rate of each video object under the constraint of a given bit-budget.

### **Spatial scalability**

Spatial scalability is a tool intended for use in video applications involving multi quality video services, video database browsing, internet video and wireless video, i.e., video systems with the primary common feature that a minimum of two layers of spatial resolution are necessary. Spatial scalability involves generating two spatial resolution video layers from a single video source such that the lower layer is coded by itself to provide the basic spatial resolution and the enhancement layer employs the spatially interpolated lower layer and carries the full spatial resolution of the input video source.

An additional advantage of spatial scalability is its ability to provide resilience to transmission errors as the more important data of the lower layer can be sent over a channel with better error performance, whereas the less critical enhancement layer data can be sent over a channel with poor error performance. Further, it can also allow interoperability between various standards.

### **Hybrid scalability**

There are a number of applications where neither the temporal scalability nor the spatial scalability may offer the necessary flexibility and control. This may necessitate use of temporal and spatial scalability simultaneously and is referred to as the hybrid scalability. Among the applications of hybrid scalability are wireless video, internet video, multiviewpoint/stereoscopic coding etc.

### **Error Resilience**

This part of ISO/IEC 14496 provides error robustness and resilience to allow accessing of image or video information over a wide range of storage and transmission media. The error resilience tools developed for this part of ISO/IEC 14496 can be divided into three major categories. These categories include synchronization, data recovery, and error concealment. It should be noted that these categories are not unique to this part of ISO/IEC 14496, and have been used elsewhere in general research in this area. It is, however, the tools contained in these categories that are of interest, and where this part of ISO/IEC 14496 makes its contribution to the problem of error resilience.

### **Patents**

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this part of ISO/IEC 14496 may involve the use of patents concerning the coded representation of picture information given in Annex H.

ISO and IEC take no position concerning the evidence, validity and scope of these patent rights.

The holders of these patent rights have assured ISO and IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of these patent rights are registered with ISO and IEC. Information may be obtained from the patent offices of the organizations listed in Annex H.

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 14496 may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.



# Information technology — Coding of audio-visual objects — Part 2: Visual

## 1 Scope

This part of ISO/IEC 14496 specifies the coded representation of picture information in the form of natural or synthetic visual objects like video sequences of rectangular or arbitrarily shaped pictures, moving 2D meshes, animated 3D face models and texture for synthetic objects. The coded representation allows for content based access for digital storage media, digital video communication and other applications. ISO/IEC 14496 specifies also the decoding process of the aforementioned coded representation. The representation supports constant bitrate transmission, variable bitrate transmission, robust transmission, content based random access (including normal random access), object based scalable decoding (including normal scalable decoding), object based bitstream editing, as well as special functions such as fast forward playback, fast reverse playback, slow motion, pause and still pictures. Synthetic objects and coding of special 2D/3D meshes, texture, and animation parameters are provided for use with downloadable models to exploit mixed media and the bandwidth improvement associated with remote manipulation of such models. ISO/IEC 14496 is intended to allow some level of interoperability with ISO/IEC 11172-2, ISO/IEC 13818-2 and ITU-T Recommendation H.263.

## 2 Normative references

The standards contain provisions which through reference in this text, constitute provisions of ISO/IEC 14496. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on ISO/IEC 14496 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards

- ITU-T Recommendation T.81 (1992)|ISO/IEC 10918-1:1994, *Information technology —Digital compression and coding of continuous-tone still images: Requirements and guidelines*.
- ISO/IEC 11172-1:1993, *Information technology — Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s — Part 1: Systems*.
- ISO/IEC 11172-2:1993, *Information technology — Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s — Part 2: Video*.
- ISO/IEC 11172-3:1993, *Information technology — Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s — Part 3: Audio*.
- ITU-T Recommendation H.222.0(1995)|ISO/IEC 13818-1:1996, *Information technology — Generic coding of moving pictures and associated audio information: Systems*.
- ITU-T Recommendation H.262(1995)|ISO/IEC 13818-2:1996, *Information technology — Generic coding of moving pictures and associated audio information: Video*.
- ISO/IEC 13818-3:1998, *Information technology — Generic coding of moving pictures and associated audio information — Part 3: Audio*.
- Recommendations and reports of the CCIR, 1990 XVIIth Plenary Assembly, Dusseldorf, 1990 Volume XI - Part 1 Broadcasting Service (Television) Recommendation ITU-R BT.601-3, *Encoding parameters of digital television for studios*.
- CCIR Volume X and XI Part 3 Recommendation ITU-R BR.648, *Recording of audio signals*.
- CCIR Volume X and XI Part 3 Report ITU-R 955-2, *Satellite sound broadcasting to vehicular, portable and fixed receivers in the range 500 - 3000Mhz*.

- IEEE Standard Specifications for the Implementations of 8 by 8 Inverse Discrete Cosine Transform, IEEE Std 1180-1990, December 6, 1990.
- IEC Publication 908:1987, *CD Digital Audio System*.
- IEC Publication 461:1986, *Time and control code for video tape recorder*.
- ITU-T Recommendation H.261 (Formerly CCITT Recommendation H.261), *Codec for audiovisual services at px64 kbit/s*.
- ITU-T Recommendation H.263, *Video Coding for Low Bitrate Communication*.

### 3 Definitions

3.1 **AC coefficient:** Any DCT coefficient for which the frequency in one or both dimensions is non-zero.

3.2 **B-VOP; bidirectionally predictive-coded video object plane (VOP):** A VOP that is coded using motion compensated prediction from past and/or future reference VOPs.

3.3 **backward compatibility:** A newer coding standard is backward compatible with an older coding standard if decoders designed to operate with the older coding standard are able to continue to operate by decoding all or part of a bitstream produced according to the newer coding standard.

3.4 **backward motion vector:** A motion vector that is used for motion compensation from a reference VOP at a later time in display order.

3.5 **backward prediction:** Prediction from the future reference VOP.

3.6 **base layer:** An independently decodable layer of a scalable hierarchy.

3.7 **binary alpha block:** A block of size 16x16 pels, colocated with macroblock, representing shape information of the binary alpha map; it is also referred to as a bab.

3.8 **binary alpha map:** A 2D binary mask used to represent the shape of a video object such that the pixels that are opaque are considered as part of the object whereas pixels that are transparent are not considered to be part of the object.

3.9 **bitstream; stream:** An ordered series of bits that forms the coded representation of the data.

3.10 **bitrate:** The rate at which the coded bitstream is delivered from the storage medium or network to the input of a decoder.

3.11 **block:** An 8-row by 8-column matrix of samples, or 64 DCT coefficients (source, quantised or dequantised).

3.12 **byte aligned:** A bit in a coded bitstream is byte-aligned if its position is a multiple of 8-bits from the first bit in the stream.

3.13 **byte:** Sequence of 8-bits.

3.14 **context based arithmetic encoding:** The method used for coding of binary shape; it is also referred to as cae.

3.15 **channel:** A digital medium or a network that stores or transports a bitstream constructed according to ISO/IEC 14496.

3.16 **chrominance format:** Defines the number of chrominance blocks in a macroblock.

3.17 **chrominance component:** A matrix, block or single sample representing one of the two colour difference signals related to the primary colours in the manner defined in the bitstream. The symbols used for the chrominance signals are Cr and Cb.

3.18 **coded B-VOP:** A B-VOP that is coded.

3.19 **coded VOP:** A coded VOP is a coded I-VOP, a coded P-VOP or a coded B-VOP.

3.20 **coded I-VOP:** An I-VOP that is coded.

3.21 **coded P-VOP:** A P-VOP that is coded.

3.22 **coded video bitstream:** A coded representation of a series of one or more VOPs as defined in this part of ISO/IEC 14496.

3.23 **coded representation:** A data element as represented in its encoded form.

3.24 **coding parameters:** The set of user-definable parameters that characterise a coded video bitstream. Bitstreams are characterised by coding parameters. Decoders are characterised by the bitstreams that they are capable of decoding.

3.25 **component:** A matrix, block or single sample from one of the three matrices (luminance and two chrominance) that make up a picture.

3.26 **composition process:** The (non-normative) process by which reconstructed VOPs are composed into a scene and displayed.

3.27 **compression:** Reduction in the number of bits used to represent an item of data.

3.28 **constant bitrate coded video:** A coded video bitstream with a constant bitrate.

3.29 **constant bitrate:** Operation where the bitrate is constant from start to finish of the coded bitstream.

3.30 **conversion ratio:** The size conversion ratio for the purpose of rate control of shape.

3.31 **data element:** An item of data as represented before encoding and after decoding.

3.32 **DC coefficient:** The DCT coefficient for which the frequency is zero in both dimensions.

3.33 **DCT coefficient:** The amplitude of a specific cosine basis function.

3.34 **decoder input buffer:** The first-in first-out (FIFO) buffer specified in the video buffering verifier.

3.35 **decoder:** An embodiment of a decoding process.

3.36 **decoding order:** The order in which the VOPs are transmitted and decoded. This order is not necessarily the same as the display order.

3.37 **decoding (process):** The process defined in this part of ISO/IEC 14496 that reads an input coded bitstream and produces decoded VOPs or audio samples.

3.38 **dequantisation:** The process of rescaling the quantised DCT coefficients after their representation in the bitstream has been decoded and before they are presented to the inverse DCT.

3.39 **digital storage media; DSM:** A digital storage or transmission device or system.

3.40 **discrete cosine transform; DCT:** Either the forward discrete cosine transform or the inverse discrete cosine transform. The DCT is an invertible, discrete orthogonal transformation. The inverse DCT is defined in annex A.

**3.41** **display order:** The order in which the decoded pictures are displayed. Normally this is the same order in which they were presented at the input of the encoder.

**3.42** **editing:** The process by which one or more coded bitstreams are manipulated to produce a new coded bitstream. Conforming edited bitstreams must meet the requirements defined in this part of ISO/IEC 14496.

**3.43** **encoder:** An embodiment of an encoding process.

**3.44** **encoding (process):** A process, not specified in this part of ISO/IEC 14496, that reads a stream of input pictures or audio samples and produces a valid coded bitstream as defined in this part of ISO/IEC 14496.

**3.45** **enhancement layer:** A relative reference to a layer (above the base layer) in a scalable hierarchy. For all forms of scalability, its decoding process can be described by reference to the lower layer decoding process and the appropriate additional decoding process for the enhancement layer itself.

**3.46** **face animation parameter units, FAPU:** Special normalized units (e.g. translational, angular, logical) defined to allow interpretation of FAPs with any facial model in a consistent way to produce reasonable results in expressions and speech pronunciation.

**3.47** **face animation parameters, FAP:** Coded streaming animation parameters that manipulate the displacements and angles of face features, and that govern the blending of visemes and face expressions during speech.

**3.48** **face animation table, FAT:** A downloadable function mapping from incoming FAPs to feature control points in the face mesh that provides piecewise linear weightings of the FAPs for controlling face movements.

**3.49** **face calibration mesh:** Definition of a 3D mesh for calibration of the shape and structure of a baseline face model.

**3.50** **face definition parameters, FDP:** Downloadable data to customize a baseline face model in the decoder to a particular face, or to download a face model along with the information about how to animate it. The FDPs are normally transmitted once per session, followed by a stream of compressed FAPs. FDPs may include feature points for calibrating a baseline face, face texture and coordinates to map it onto the face, animation tables, etc.

**3.51** **face feature control point:** A normative vertex point in a set of such points that define the critical locations within face features for control by FAPs and that allow for calibration of the shape of the baseline face.

**3.52** **face interpolation transform, FIT:** A downloadable node type defined in ISO/IEC 14496-1 for optional mapping of incoming FAPs to FAPs before their application to feature points, through weighted rational polynomial functions, for complex cross-coupling of standard FAPs to link their effects into custom or proprietary face models.

**3.53** **face model mesh:** A 2D or 3D contiguous geometric mesh defined by vertices and planar polygons utilizing the vertex coordinates, suitable for rendering with photometric attributes (e.g. texture, color, normals).

**3.54** **feathering:** A tool that tapers the values around edges of binary alpha mask for composition with the background.

**3.55** **flag:** A one bit integer variable which may take one of only two values (zero and one).

3.56 **forbidden**: The term “forbidden” when used in the clauses defining the coded bitstream indicates that the value shall never be used. This is usually to avoid emulation of start codes.

3.57 **forced updating**: The process by which macroblocks are intra-coded from time-to-time to ensure that mismatch errors between the inverse DCT processes in encoders and decoders cannot build up excessively.

3.58 **forward compatibility**: A newer coding standard is forward compatible with an older coding standard if decoders designed to operate with the newer coding standard are able to decode bitstreams of the older coding standard.

3.59 **forward motion vector**: A motion vector that is used for motion compensation from a reference frame VOP at an earlier time in display order.

3.60 **forward prediction**: Prediction from the past reference VOP.

3.61 **frame**: A frame contains lines of spatial information of a video signal. For progressive video, these lines contain samples starting from one time instant and continuing through successive lines to the bottom of the frame.

3.62 **frame period**: The reciprocal of the frame rate.

3.63 **frame rate**: The rate at which frames are be output from the composition process.

3.64 **future reference VOP**: A future reference VOP is a reference VOP that occurs at a later time than the current VOP in display order.

3.65 **VOP reordering**: The process of reordering the reconstructed VOPs when the decoding order is different from the composition order for display. VOP reordering occurs when B-VOPs are present in a bitstream. There is no VOP reordering when decoding low delay bitstreams.

3.66 **hybrid scalability**: Hybrid scalability is the combination of two (or more) types of scalability.

3.67 **interlace**: The property of conventional television frames where alternating lines of the frame represent different instances in time. In an interlaced frame, one of the field is meant to be displayed first. This field is called the first field. The first field can be the top field or the bottom field of the frame.

3.68 **I-VOP; intra-coded VOP**: A VOP coded using information only from itself.

3.69 **intra coding**: Coding of a macroblock or VOP that uses information only from that macroblock or VOP.

3.70 **intra shape coding**: Shape coding that does not use any temporal prediction.

3.71 **inter shape coding**: Shape coding that uses temporal prediction.

3.72 **level**: A defined set of constraints on the values which may be taken by the parameters of this part of ISO/IEC 14496 within a particular profile. A profile may contain one or more levels. In a different context, level is the absolute value of a non-zero coefficient (see “run”).

3.73 **layer**: In a scalable hierarchy denotes one out of the ordered set of bitstreams and (the result of) its associated decoding process.

3.74 **layered bitstream**: A single bitstream associated to a specific layer (always used in conjunction with layer qualifiers, e. g. “enhancement layer bitstream”).

3.75 **lower layer**: A relative reference to the layer immediately below a given enhancement layer (implicitly including decoding of *all* layers below this enhancement layer).

3.76 **luminance component**: A matrix, block or single sample representing a monochrome representation of the signal and related to the primary colours in the manner defined in the bitstream. The symbol used for luminance is Y.

3.77 **Mbit**: 1 000 000 bits.

3.78 **macroblock**: The four  $8 \times 8$  blocks of luminance data and the two (for 4:2:0 chrominance format) corresponding  $8 \times 8$  blocks of chrominance data coming from a  $16 \times 16$  section of the luminance component of the picture. Macroblock is sometimes used to refer to the sample data and sometimes to the coded representation of the sample values and other data elements defined in the macroblock header of the syntax defined in this part of ISO/IEC 14496. The usage is clear from the context.

3.79 **mesh**: A 2D triangular mesh refers to a planar graph which tessellates a video object plane into triangular patches. The vertices of the triangular mesh elements are referred to as node points. The straight-line segments between node points are referred to as edges. Two triangles are adjacent if they share a common edge.

3.80 **mesh geometry**: The spatial locations of the node points and the triangular structure of a mesh.

3.81 **mesh motion**: The temporal displacements of the node points of a mesh from one time instance to the next.

3.82 **motion compensation**: The use of motion vectors to improve the efficiency of the prediction of sample values. The prediction uses motion vectors to provide offsets into the past and/or future reference VOPs containing previously decoded sample values that are used to form the prediction error.

3.83 **motion estimation**: The process of estimating motion vectors during the encoding process.

3.84 **motion vector**: A two-dimensional vector used for motion compensation that provides an offset from the coordinate position in the current picture or field to the coordinates in a reference VOP.

3.85 **motion vector for shape**: A motion vector used for motion compensation of shape.

3.86 **non-intra coding**: Coding of a macroblock or a VOP that uses information both from itself and from macroblocks and VOPs occurring at other times.

3.87 **opaque macroblock**: A macroblock with shape mask of all 255's.

3.88 **P-VOP; predictive-coded VOP**: A picture that is coded using motion compensated prediction from the past VOP.

3.89 **parameter**: A variable within the syntax of this part of ISO/IEC 14496 which may take one of a range of values. A variable which can take one of only two values is called a flag.

3.90 **past reference picture**: A past reference VOP is a reference VOP that occurs at an earlier time than the current VOP in composition order.

3.91 **picture**: Source, coded or reconstructed image data. A source or reconstructed picture consists of three rectangular matrices of 8-bit numbers representing the luminance and two chrominance signals. A "coded VOP" was defined earlier. For progressive video, a picture is identical to a frame.

3.92 **prediction**: The use of a predictor to provide an estimate of the sample value or data element currently being decoded.

3.93 **prediction error**: The difference between the actual value of a sample or data element and its predictor.

3.94 **predictor**: A linear combination of previously decoded sample values or data elements.

3.95 **profile**: A subset of the syntax of this part of ISO/IEC 14496, defined in terms of Visual Object Types.

3.96 **progressive**: The property of film frames where all the samples of the frame represent the same instances in time.

3.97 **quantisation matrix**: A set of sixty-four 8-bit values used by the dequantiser.

3.98 **quantised DCT coefficients**: DCT coefficients before dequantisation. A variable length coded representation of quantised DCT coefficients is transmitted as part of the coded video bitstream.

3.99 **quantiser scale**: A scale factor coded in the bitstream and used by the decoding process to scale the dequantisation.

3.100 **random access**: The process of beginning to read and decode the coded bitstream at an arbitrary point.

3.101 **reconstructed VOP**: A reconstructed VOP consists of three matrices of 8-bit numbers representing the luminance and two chrominance signals. It is obtained by decoding a coded VOP.

3.102 **reference VOP**: A reference VOP is a reconstructed VOP that was coded in the form of a coded I-VOP or a coded P-VOP. Reference VOPs are used for forward and backward prediction when P-VOPs and B-VOPs are decoded.

3.103 **reordering delay**: A delay in the decoding process that is caused by VOP reordering.

3.104 **reserved**: The term “reserved” when used in the clauses defining the coded bitstream indicates that the value may be used in the future for ISO/IEC defined extensions.

3.105 **scalable hierarchy**: coded video data consisting of an ordered set of more than one video bitstream.

3.106 **scalability**: Scalability is the ability of a decoder to decode an ordered set of bitstreams to produce a reconstructed sequence. Moreover, useful video is output when subsets are decoded. The minimum subset that can thus be decoded is the first bitstream in the set which is called the base layer. Each of the other bitstreams in the set is called an enhancement layer. When addressing a specific enhancement layer, “lower layer” refers to the bitstream that precedes the enhancement layer.

3.107 **side information**: Information in the bitstream necessary for controlling the decoder.

3.108 **run**: The number of zero coefficients preceding a non-zero coefficient, in the scan order. The absolute value of the non-zero coefficient is called “level”.

3.109 **S-VOP**: A picture that is coded using information obtained by warping whole or part of a static sprite.

3.110 **saturation**: Limiting a value that exceeds a defined range by setting its value to the maximum or minimum of the range as appropriate.

3.111 **source; input**: Term used to describe the video material or some of its attributes before encoding.

3.112 **spatial prediction**: prediction derived from a decoded frame of the reference layer decoder used in spatial scalability.

3.113 **spatial scalability**: A type of scalability where an enhancement layer also uses predictions from sample data derived from a lower layer without using motion vectors. The layers can have different VOP sizes or VOP rates.

3.114 **static sprite**: The luminance, chrominance and binary alpha plane for an object which does not vary in time.

3.115 **start codes**: 32-bit codes embedded in that coded bitstream that are unique. They are used for several purposes including identifying some of the structures in the coding syntax.

3.116 **stuffing (bits); stuffing (bytes)**: Code-words that may be inserted into the coded bitstream that are discarded in the decoding process. Their purpose is to increase the bitrate of the stream which would otherwise be lower than the desired bitrate.

3.117 **temporal prediction**: prediction derived from reference VOPs other than those defined as spatial prediction.

3.118 **temporal scalability**: A type of scalability where an enhancement layer also uses predictions from sample data derived from a lower layer using motion vectors. The layers have identical frame size, and but can have different VOP rates.

3.119 **top layer**: the topmost layer (with the highest layer\_id) of a scalable hierarchy.

3.120 **transparent macroblock**: A macroblock with shape mask of all zeros.

3.121 **variable bitrate**: Operation where the bitrate varies with time during the decoding of a coded bitstream.

3.122 **variable length coding; VLC**: A reversible procedure for coding that assigns shorter code-words to frequent events and longer code-words to less frequent events.

3.123 **video buffering verifier; VBV**: Part of a hypothetical decoder that is conceptually connected to the output of the encoder. Its purpose is to provide a constraint on the variability of the data rate that an encoder or editing process may produce.

3.124 **video complexity verifier; VCV**: Part of a hypothetical decoder that is conceptually connected to the output of the encoder. Its purpose is to provide a constraint on the maximum processing requirements of the bitstream that an encoder or editing process may produce.

3.125 **video memory verifier; VMV**: Part of a hypothetical decoder that is conceptually connected to the output of the encoder. Its purpose is to provide a constraint on the maximum reference memory requirements of the bitstream that an encoder or editing process may produce.

3.126 **video presentation verifier; VPV**: Part of a hypothetical decoder that is conceptually connected to the output of the encoder. Its purpose is to provide a constraint on the maximum presentation memory requirements of the bitstream that an encoder or editing process may produce.

3.127 **video session**: The highest syntactic structure of coded video bitstreams. It contains a series of one or more coded video objects.

3.128 **viseme**: the physical (visual) configuration of the mouth, tongue and jaw that is visually correlated with the speech sound corresponding to a phoneme.

3.129 **warping**: Processing applied to extract a sprite VOP from a static sprite. It consists of a global spatial transformation driven by a few motion parameters (0,2,4,6,8), to recover luminance, chrominance and shape information.

3.130 **zigzag scanning order**: A specific sequential ordering of the DCT coefficients from (approximately) the lowest spatial frequency to the highest.

#### 4 Abbreviations and symbols

The mathematical operators used to describe this part of ISO/IEC 14496 are similar to those used in the C programming language. However, integer divisions with truncation and rounding are specifically defined. Numbering and counting loops generally begin from zero.

#### 4.1 Arithmetic operators

+	Addition.
-	Subtraction (as a binary operator) or negation (as a unary operator).
++	Increment. i.e. $x++$ is equivalent to $x = x + 1$
--	Decrement. i.e. $x--$ is equivalent to $x = x - 1$
$\times$ *}	Multiplication.
$\wedge$	Power.
/	Integer division with truncation of the result toward zero. For example, $7/4$ and $-7/4$ are truncated to 1 and $-7/4$ and $7/-4$ are truncated to -1.
//	Integer division with rounding to the nearest integer. Half-integer values are rounded away from zero unless otherwise specified. For example $3//2$ is rounded to 2, and $-3//2$ is rounded to -2.
///	Integer division with sign dependent rounding to the nearest integer. Half-integer values when positive are rounded away from zero, and when negative are rounded towards zero. For example $3///2$ is rounded to 2, and $-3///2$ is rounded to -1.
////	Integer division with truncation towards the negative infinity.
$\div$	Used to denote division in mathematical equations where no truncation or rounding is intended.
%	Modulus operator. Defined only for positive numbers.
Sign( )	$\text{Sign}(x) = \begin{cases} 1 & x \geq 0 \\ -1 & x < 0 \end{cases}$
Abs( )	$\text{Abs}(x) = \begin{cases} x & x \geq 0 \\ -x & x < 0 \end{cases}$
$\sum_{i=a}^{i=b} f(i)$	The summation of the $f(i)$ with $i$ taking integral values from $a$ up to, but not including $b$ .

#### 4.2 Logical operators

	Logical OR.
&&	Logical AND.
!	Logical NOT.

#### 4.3 Relational operators

>	Greater than.
$\geq$	Greater than or equal to.
$\geq$	Greater than or equal to.
<	Less than.
$\leq$	Less than or equal to.

$\leq$  Less than or equal to.

$==$  Equal to.

$!=$  Not equal to.

$\max [ , \dots , ]$  the maximum value in the argument list.

$\min [ , \dots , ]$  the minimum value in the argument list.

#### 4.4 Bitwise operators

$\&$  AND

$|$  OR

$>>$  Shift right with sign extension.

$<<$  Shift left with zero fill.

#### 4.5 Conditional operators

$?:$   $(condition? a : b) = \begin{cases} a & \text{if } condition \text{ is true,} \\ b & \text{otherwise.} \end{cases}$

#### 4.6 Assignment

$=$  Assignment operator.

#### 4.7 Mnemonics

The following mnemonics are defined to describe the different data types used in the coded bitstream.

**bslbf** Bit string, left bit first, where “left” is the order in which bit strings are written in this part of ISO/IEC 14496. Bit strings are generally written as a string of 1s and 0s within single quote marks, e.g. ‘1000 0001’. Blanks within a bit string are for ease of reading and have no significance. For convenience large strings are occasionally written in hexadecimal, in this case conversion to a binary in the conventional manner will yield the value of the bit string. Thus the left most hexadecimal digit is first and in each hexadecimal digit the most significant of the four bits is first.

**uimsbf** Unsigned integer, most significant bit first.

**simsbf** Signed integer, in two's complement format, most significant (sign) bit first.

**vlclbf** Variable length code, left bit first, where “left” refers to the order in which the VLC codes are written. The byte order of multibyte words is most significant byte first.

#### 4.8 Constants

$\pi$  3,141 592 653 58...

$e$  2,718 281 828 45...

### 5 Conventions

#### 5.1 Method of describing bitstream syntax

The bitstream retrieved by the decoder is described in subclause 6.2. Each data item in the bitstream is in bold type. It is described by its name, its length in bits, and a mnemonic for its type and order of transmission.

The action caused by a decoded data element in a bitstream depends on the value of that data element and on data elements previously decoded. The decoding of the data elements and definition of the state variables used in their decoding are described in subclause 6.3. The following constructs are used to express the conditions when data elements are present, and are in normal type:

while ( condition ) { <b>data_element</b> ... }	If the condition is true, then the group of data elements occurs next in the data stream. This repeats until the condition is not true.
do { <b>data_element</b> ... } while ( condition )	The data element always occurs at least once.  The data element is repeated until the condition is not true.
if ( condition ) { <b>data_element</b> ... } else { <b>data_element</b> ... }	If the condition is true, then the first group of data elements occurs next in the data stream.  If the condition is not true, then the second group of data elements occurs next in the data stream.
for ( i = m; i < n; i++ ) { <b>data_element</b> ... }	The group of data elements occurs (n-m) times. Conditional constructs within the group of data elements may depend on the value of the loop control variable i, which is set to m for the first occurrence, incremented by one for the second occurrence, and so forth.
/* comment ... */	Explanatory comment that may be deleted entirely without in any way altering the syntax.

This syntax uses the 'C-code' convention that a variable or expression evaluating to a non-zero value is equivalent to a condition that is true and a variable or expression evaluating to a zero value is equivalent to a condition that is false. In many cases a literal string is used in a condition. For example;

```
if ( video_object_layer_shape == "rectangular" ) ...
```

In such cases the literal string is that used to describe the value of the bitstream element in subclause 6.3. In this example, we see that "rectangular" is defined in a Table 6-14 to be represented by the two bit binary number '00'.

As noted, the group of data elements may contain nested conditional constructs. For compactness, the brackets {} are omitted when only one data element follows.

**data\_element [n]** data\_element [n] is the n+1th element of an array of data.

**data\_element [m][n]** data\_element [m][n] is the m+1, n+1th element of a two-dimensional array of data.

**data\_element [l][m][n]** data\_element [l][m][n] is the l+1, m+1, n+1th element of a three-dimensional array of data.

While the syntax is expressed in procedural terms, it should not be assumed that subclause 6.2 implements a satisfactory decoding procedure. In particular, it defines a correct and error-free input bitstream. Actual decoders must include means to look for start codes in order to begin decoding correctly, and to identify errors, erasures or insertions while decoding. The methods to identify these situations, and the actions to be taken, are not standardised.

## 5.2 Definition of functions

Several utility functions for picture coding algorithm are defined as follows:

### 5.2.1 Definition of next\_bits() function

The function next\_bits() permits comparison of a bit string with the next bits to be decoded in the bitstream.

### 5.2.2 Definition of bytealigned() function

The function bytealigned () returns 1 if the current position is on a byte boundary, that is the next bit in the bitstream is the first bit in a byte. Otherwise it returns 0.

### 5.2.3 Definition of nextbits\_bytealigned() function

The function nextbits\_bytealigned() returns a bit string starting from the next byte aligned position. This permits comparison of a bit string with the next byte aligned bits to be decoded in the bitstream. If the current location in the bitstream is already byte aligned and the 8 bits following the current location are '01111111', the bits subsequent to these 8 bits are returned. The current location in the bitstream is not changed by this function.

### 5.2.4 Definition of next\_start\_code() function

The next\_start\_code() function removes any zero bit and a string of 0 to 7 '1' bits used for stuffing and locates the next start code.

next_start_code() {	No. of bits	Mnemonic
<b>zero_bit</b>	1	'0'
while (!bytealigned())		
<b>one_bit</b>	1	'1'
}		

This function checks whether the current position is byte aligned. If it is not, a zero stuffing bit followed by a number of one stuffing bits may be present before the start code.

### 5.2.5 Definition of next\_resync\_marker() function

The next\_resync\_marker() function removes any zero bit and a string of 0 to 7 '1' bits used for stuffing and locates the next resync marker; it thus performs similar operation as next\_start\_code() but for resync\_marker.

next_resync_marker() {	No. of bits	Mnemonic
<b>zero_bit</b>	1	'0'
while (!bytealigned())		
<b>one_bit</b>	1	'1'
}		

### 5.2.6 Definition of transparent\_mb() function

The function transparent\_mb() returns 1 if the current macroblock consists only of transparent pixels. Otherwise it returns 0.

### 5.2.7 Definition of transparent\_block() function

The function transparent\_block(j) returns 1 if the 8x8 with index j consists only of transparent pixels. Otherwise it returns 0. The index value for each block is defined in Figure 6-5.

## 5.3 Reserved, forbidden and marker\_bit

The terms “reserved” and “forbidden” are used in the description of some values of several fields in the coded bitstream.

The term “reserved” indicates that the value may be used in the future for ISO/IEC defined extensions.

The term “forbidden” indicates a value that shall never be used (usually in order to avoid emulation of start codes).

The term “marker\_bit” indicates a one bit integer in which the value zero is forbidden (and it therefore shall have the value ‘1’). These marker bits are introduced at several points in the syntax to avoid start code emulation.

The term “zero\_bit” indicates a one bit integer with the value zero.

## 5.4 Arithmetic precision

In order to reduce discrepancies between implementations of this part of ISO/IEC 14496, the following rules for arithmetic operations are specified.

- (a) Where arithmetic precision is not specified, such as in the calculation of the IDCT, the precision shall be sufficient so that significant errors do not occur in the final integer values.
- (b) Where ranges of values are given, the end points are included if a square bracket is present, and excluded if a round bracket is used. For example, [a, b) means from a to b, including a but excluding b.

## 6 Visual bitstream syntax and semantics

### 6.1 Structure of coded visual data

Coded visual data can be of several different types, such as video data, still texture data, 2D mesh data or facial animation parameter data.

Synthetic objects and their attribution are structured in a hierarchical manner to support both bitstream scalability and object scalability. ISO/IEC 14496-1 of the specification provides the approach to spatial-temporal scene composition including normative 2D/3D scene graph nodes and their composition supported by Binary Interchange Format Specification. At this level, synthetic and natural object composition relies on ISO/IEC 14496-1 with subsequent (non-normative) rendering performed by the application to generate specific pixel-oriented views of the models.

Coded video data consists of an ordered set of video bitstreams, called layers. If there is only one layer, the coded video data is called non-scalable video bitstream. If there are two layers or more, the coded video data is called a scalable hierarchy.

One of the layers is called base layer, and it can always be decoded independently. Other layers are called enhancement layers, and can only be decoded together with the lower layers (previous layers in the ordered set), starting with the base layer. The multiplexing of these layers is discussed in ISO/IEC 14496-1. The base layer of a scalable set of streams can be coded by other standards. The Enhancement layers shall conform to this part of ISO/IEC 14496. In general the visual bitstream can be thought of as a syntactic hierarchy in which syntactic structures contain one or more subordinate structures.

Visual texture, referred to herein as still texture coding, is designed for maintaining high visual quality in the transmission and rendering of texture under widely varied viewing conditions typical of interaction with 2D/3D synthetic scenes. Still texture coding provides for a multi-layer representation of luminance, color and shape. This supports progressive transmission of the texture for image build-up as it is received by a terminal. Also supported is the downloading of the texture resolution hierarchy for construction of image pyramids used by 3D graphics APIs. Quality and SNR scalability are supported by the structure of still texture coding.

Coded mesh data consists of a single non-scalable bitstream. This bitstream defines the structure and motion of a 2D mesh object. Texture that is to be mapped onto the mesh geometry is coded separately.

Coded face animation parameter data consists of one non-scaleable bitstream. It defines the animation of the facemodel of the decoder. Face animation data is structured as standard formats for downloadable models and their animation controls, and a single layer of compressed face animation parameters used for remote manipulation of the face model. The face is a node in a scene graph that includes face geometry ready for rendering. The shape, texture and expressions of the face are generally controlled by the bitstream containing instances of Facial Definition Parameter (FDP) sets and/or Facial Animation Parameter (FAP) sets. Upon initial or baseline construction, the face object contains a generic face with a neutral expression. This face can receive FAPs from the bitstream and be subsequently rendered to produce animation of the face. If FDPs are transmitted, the generic face is transformed into a particular face of specific shape and appearance. A downloaded face model via FDPs is a scene graph for insertion in the face node.

### 6.1.1 Visual object sequence

Visual object sequence is the highest syntactic structure of the coded visual bitstream.

A visual object sequence commences with a `visual_object_sequence_start_code` which is followed by one or more `visual_objects` coded concurrently. The visual object sequence is terminated by a `visual_object_sequence_end_code`.

### 6.1.2 Visual object

A visual object commences with a `visual_object_start_code`, is followed by profile and level identification, and a visual object id, and is followed by a video object, a still texture object, a mesh object, or a face object.

### 6.1.3 Video object

A video object commences with a `video_object_start_code`, and is followed by one or more video object layers.

#### 6.1.3.1 Progressive and interlaced sequences

This part of ISO/IEC 14496 deals with coding of both progressive and interlaced sequences.

The sequence, at the output of the decoding process, consists of a series of reconstructed VOPs separated in time and are readied for display via the compositor.

#### 6.1.3.2 Frame

A frame consists of three rectangular matrices of integers; a luminance matrix (Y), and two chrominance matrices (Cb and Cr).

#### 6.1.3.3 VOP

A reconstructed VOP is obtained by decoding a coded VOP. A coded VOP may have been derived from either a progressive or interlaced frame.

#### 6.1.3.4 VOP types

There are four types of VOPs that use different coding methods:

1. An Intra-coded (I) VOP is coded using information only from itself.

2. A Predictive-coded (P) VOP is a VOP which is coded using motion compensated prediction from a past reference VOP.
3. A Bidirectionally predictive-coded (B) VOP is a VOP which is coded using motion compensated prediction from a past and/or future reference VOP(s).
4. A sprite (S) VOP is a VOP for a sprite object.

#### 6.1.3.5 I-VOPs and group of VOPs

I-VOPs are intended to assist random access into the sequence. Applications requiring random access, fast-forward playback, or fast reverse playback may use I-VOPs relatively frequently.

I-VOPs may also be used at scene cuts or other cases where motion compensation is ineffective.

Group of VOP (GOV) header is an optional header that can be used immediately before a coded I-VOP to indicate to the decoder:

- 1) the modulo part (i.e. the full second units) of the time base for the next VOP after the GOV header in display order
- 2) if the first consecutive B-VOPs immediately following the coded I-VOP can be reconstructed properly in the case of a random access.

In a non scalable bitstream or the base layer of a scalable bitstream, the first coded VOP following a GOV header shall be a coded I-VOP.

#### 6.1.3.6 Format

In this format the Cb and Cr matrices shall be one half the size of the Y-matrix in both horizontal and vertical dimensions. The Y-matrix shall have an even number of lines and samples.

The luminance and chrominance samples are positioned as shown in Figure 6-1. The two variations in the vertical and temporal positioning of the samples for interlaced VOPs are shown in Figure 6-2 and Figure 6-3.

Figure 6-4 shows the vertical and temporal positioning of the samples in a progressive frame.

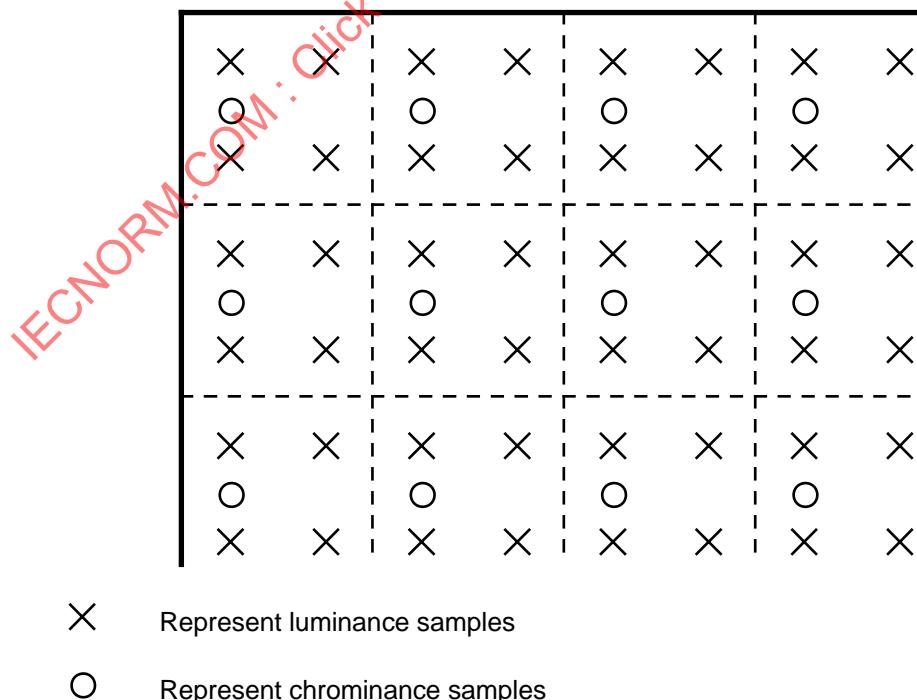


Figure 6-1 -- The position of luminance and chrominance samples in 4:2:0 data

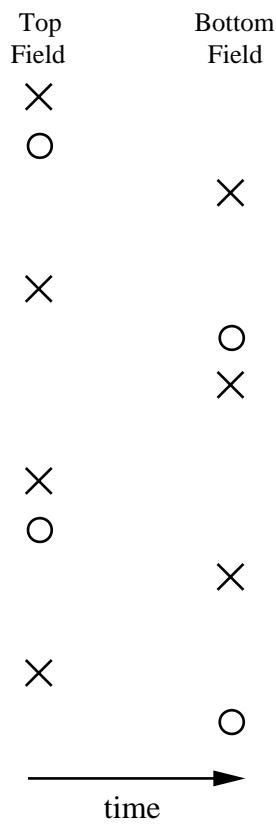


Figure 6-2 -- Vertical and temporal positions of samples in an interlaced frame with `top_field_first=1`

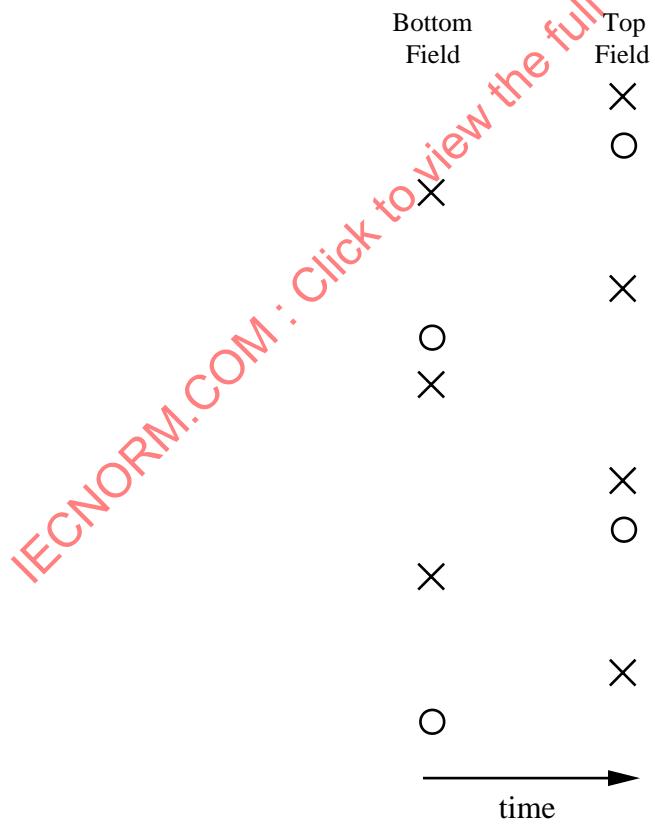


Figure 6-3 -- Vertical and temporal position of samples in an interlaced frame with `top_field_first=0`



**Figure 6-4 -- Vertical and temporal positions of samples in a progressive frame**

The binary alpha plane for each VOP is represented by means of a bounding rectangle as described in clause F.2, and it has always the same number of lines and pixels per line as the luminance plane of the VOP bounding rectangle. The positions between the luminance and chrominance pixels of the bounding rectangle are defined in this clause according to the 4:2:0 format. For the progressive case, each 2x2 block of luminance pixels in the bounding rectangle associates to one chrominance pixel. For the interlaced case, each 2x2 block of luminance pixels of the same field in the bounding rectangle associates to one chrominance pixel of that field.

In order to perform the padding process on the two chrominance planes, it is necessary to generate a binary alpha plane which has the same number of lines and pixels per line as the chrominance planes. Therefore, when non-scalable shape coding is used, this binary alpha plane associated with the chrominance planes is created from the binary alpha plane associated with the luminance plane by the subsampling process defined below:

For each 2x2 block of the binary alpha plane associated with the luminance plane of the bounding rectangle (of the same frame for the progressive and of the same field for the interlaced case), the associated pixel value of the binary alpha plane associated with the chrominance planes is set to 255 if any pixel of said 2x2 block of the binary alpha plane associated with the luminance plane equals 255.

#### 6.1.3.7 VOP reordering

When a video object layer contains coded B-VOPs, the number of consecutive coded B-VOPs is variable and unbounded. The first coded VOP shall not be a B-VOP.

A video object layer may contain no coded P-VOPs. A video object layer may also contain no coded I-VOPs in which case some care is required at the start of the video object layer and within the video object layer to effect both random access and error recovery.

The order of the coded VOPs in the bitstream, also called decoding order, is the order in which a decoder reconstructs them. The order of the reconstructed VOPs at the output of the decoding process, also called the display order, is not always the same as the decoding order and this subclause defines the rules of VOP reordering that shall happen within the decoding process.

When the video object layer contains no coded B-VOPs, the decoding order is the same as the display order.

When B-VOPs are present in the video object layer re-ordering is performed according to the following rules:

If the current VOP in decoding order is a B-VOP the output VOP is the VOP reconstructed from that B-VOP.

If the current VOP in decoding order is a I-VOP or P-VOP the output VOP is the VOP reconstructed from the previous I-VOP or P-VOP if one exists. If none exists, at the start of the video object layer, no VOP is output.

The following is an example of VOPs taken from the beginning of a video object layer. In this example there are two coded B-VOPs between successive coded P-VOPs and also two coded B-VOPs between successive coded I- and P-VOPs. VOP '1I' is used to form a prediction for VOP '4P'. VOPs '4P' and '1I' are both used to form predictions for VOPs '2B' and '3B'. Therefore the order of coded VOPs in the coded sequence shall be '1I', '4P', '2B', '3B'. However, the decoder shall display them in the order '1I', '2B', '3B', '4P'.

At the encoder input,

1	2	3	4	5	6	7	8	9	10	11	12	13
I	B	B	P	B	B	P	B	B	I	B	B	P

At the encoder output, in the coded bitstream, and at the decoder input,

1	4	2	3	7	5	6	10	8	9	13	11	12
I	P	B	B	P	B	B	I	B	B	P	B	B

At the decoder output,

1	2	3	4	5	6	7	8	9	10	11	12	13
I	B	B	P	B	B	P	B	B	I	B	B	P

#### 6.1.3.8 Macroblock

A macroblock contains a section of the luminance component and the spatially corresponding chrominance components. The term macroblock can either refer to source and decoded data or to the corresponding coded data elements. A skipped macroblock is one for which no information is transmitted. Presently there is only one chrominance format for a macroblock, namely, 4:2:0 format. The orders of blocks in a macroblock is illustrated below:

A 4:2:0 Macroblock consists of 6 blocks. This structure holds 4 Y, 1 Cb and 1 Cr Blocks and the block order is depicted in Figure 6-5.

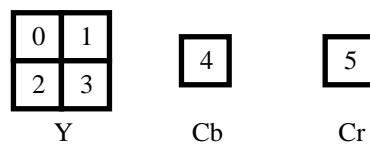


Figure 6-5 -- 4:2:0 Macroblock structure

The organisation of VOPs into macroblocks is as follows.

For the case of a progressive VOP, the interlaced flag (in the VOP header) is set to "0" and the organisation of lines of luminance VOP into macroblocks is called frame organization and is illustrated in Figure 6-6. In this case, frame DCT coding is employed.

For the case of interlaced VOP, the interlaced flag is set to "1" and the organisation of lines of luminance VOP into macroblocks can be either frame organization or field organization and thus both frame and field DCT coding may be used in the VOP.

- In the case of frame DCT coding, each luminance block shall be composed of lines from two fields alternately. This is illustrated in Figure 6-6.
- In the case of field DCT coding, each luminance block shall be composed of lines from only one of the two fields. This is illustrated in Figure 6-7.

Only frame DCT coding is applied to the chrominance blocks. It should be noted that field based predictions may be applied for these chrominance blocks which will require predictions of 8x4 regions (after half-sample filtering).

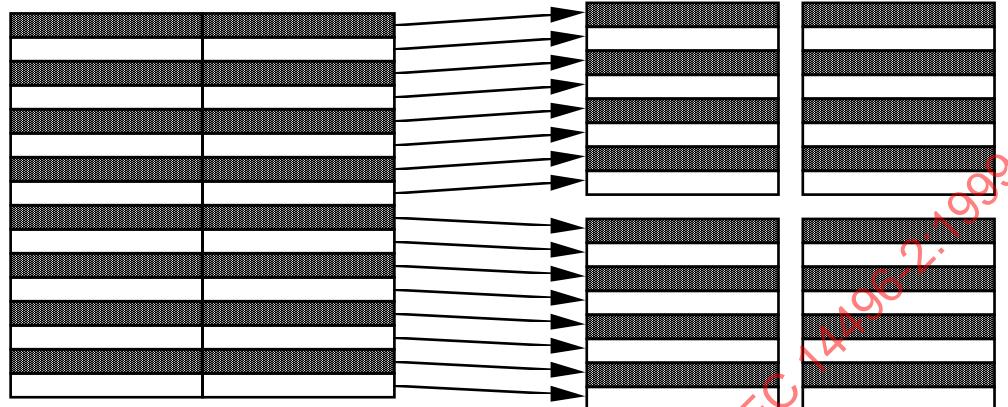


Figure 6-6 -- Luminance macroblock structure in frame DCT coding

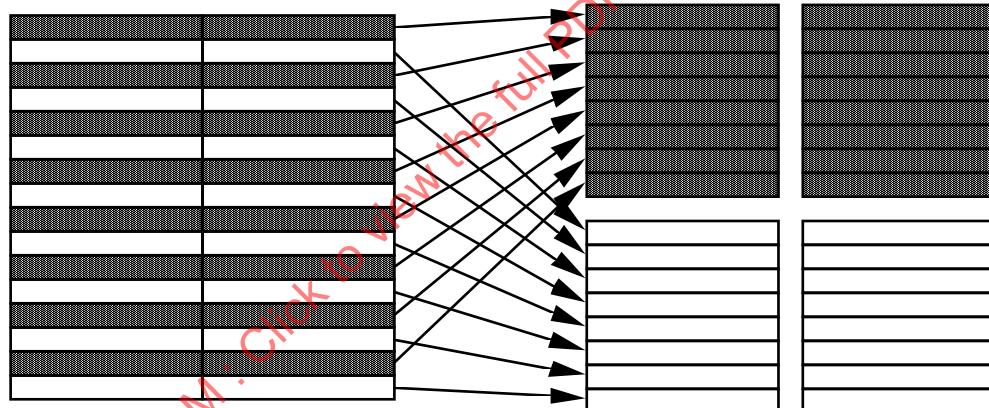


Figure 6-7 -- Luminance macroblock structure in field DCT coding

#### 6.1.3.9 Block

The term **block** can refer either to source and reconstructed data or to the DCT coefficients or to the corresponding coded data elements.

When the block refers to source and reconstructed data it refers to an orthogonal section of a luminance or chrominance component with the same number of lines and samples. There are 8 lines and 8 samples/line in the block.

#### 6.1.4 Mesh object

A 2D triangular *mesh* refers to a tessellation of a 2D visual object plane into triangular patches. The vertices of the triangular patches are called *node points*. The straight-line segments between node points are called *edges*. Two triangles are *adjacent* if they share a common edge.

A *dynamic* 2D mesh consists of a temporal sequence of 2D triangular meshes, where each mesh has the same topology, but node point locations may differ from one mesh to the next. Thus, a dynamic 2D mesh can be specified by the geometry of the initial 2D mesh and motion vectors at the node points for subsequent meshes, where each

motion vector points from a node point of the previous mesh in the sequence to the corresponding node point of the current mesh. The dynamic 2D mesh can be used to create 2D animations by mapping texture from e.g. a video object plane onto successive 2D meshes.

A 2D dynamic mesh with *implicit structure* refers to a 2D dynamic mesh of which the initial mesh has either *uniform* or *Delaunay* topology. In both cases, the topology of the initial mesh does not have to be coded (since it is implicitly defined), only the node point locations of the initial mesh have to be coded. Note that in both the uniform and Delaunay case, the mesh is restricted to be *simple*, i.e. it consists of a single connected component without any holes, topologically equivalent to a disk.

A *mesh object* represents the geometry and motion of a 2D triangular mesh. A mesh object consists of one or more *mesh object planes*, each corresponding to a 2D triangular mesh at a certain time instance. An example of a mesh object is shown in the figure below.

A sequence of mesh object planes represents the piece-wise deformations to be applied to a video object plane or still texture object to create a synthetic animated video object. Triangular patches of a video object plane are to be warped according to the motion of corresponding triangular mesh elements. The motion of mesh elements is specified by the temporal displacements of the mesh node points.

The syntax and semantics of the mesh object pertains to the mesh geometry and mesh motion only; the video object to be used in an animation is coded separately. The warping or texture mapping applied to render visual object planes is handled in the context of scene composition. Furthermore, the syntax does not allow explicit encoding of other mesh properties such as colors or texture coordinates.

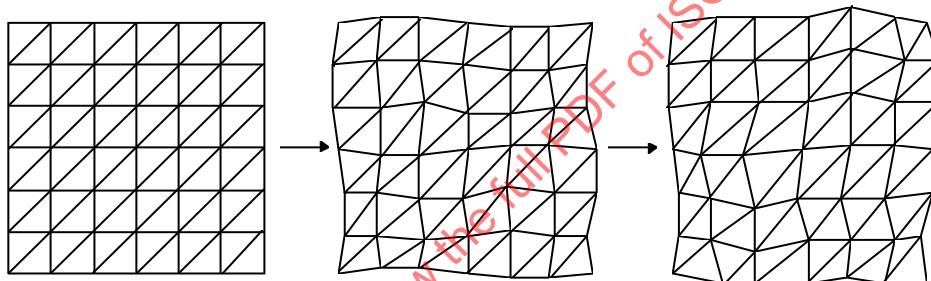


Figure 6-8 -- Mesh object with uniform triangular geometry

#### 6.1.4.1 Mesh object plane

There are two types of mesh object planes that use different coding methods.

An *intra-coded* mesh object plane codes the geometry of a single 2D mesh. An intra-coded mesh is either of uniform or Delaunay type. In the case of a mesh of uniform type, the mesh geometry is coded by a small set of parameters. In the case of a mesh of Delaunay type, the mesh geometry is coded by the locations of the node points and boundary edge segments. The triangular mesh structure is specified implicitly by the coded information.

A *predictive-coded* mesh object plane codes a 2D mesh using temporal prediction from a past reference mesh object plane. The triangular structure of a predictive-coded mesh is identical to the structure of the reference mesh used for prediction; however, the locations of node points may change. The displacements of node points represent the motion of the mesh and are coded by specifying the motion vectors of node points from the reference mesh towards the predictive-coded mesh.

The locations of mesh node points correspond to locations in a video object or still texture object. Mesh node point locations and motion vectors are represented and coded with half pixel accuracy.

#### 6.1.5 Face object

Conceptually the face object consists of a collection of nodes in a scene graph which are animated by the facial object bitstream. The shape, texture and expressions of the face are generally controlled by the bitstream containing instances of Facial Definition Parameter (FDP) sets and/or Facial Animation Parameter (FAP) sets. Upon construction, the Face object contains a generic face with a neutral expression. This face can already be rendered.

It is also immediately capable of receiving the FAPs from the bitstream, which will produce animation of the face: expressions, speech etc. If FDPs are received, they are used to transform the generic face into a particular face determined by its shape and (optionally) texture. Optionally, a complete face model can be downloaded via the FDP set as a scene graph for insertion in the face node.

The FDP and FAP sets are designed to allow the definition of a facial shape and texture, as well as animation of faces reproducing expressions, emotions and speech pronunciation. The FAPs, if correctly interpreted, will produce reasonably similar high level results in terms of expression and speech pronunciation on different facial models, without the need to initialize or calibrate the model. The FDPs allow the definition of a precise facial shape and texture in the setup phase. If the FDPs are used in the setup phase, it is also possible to produce more precisely the movements of particular facial features. Using a phoneme/bookmark to FAP conversion it is possible to control facial models accepting FAPs via TTS systems. The translation from phonemes to FAPs is not standardized. It is assumed that every decoder has a default face model with default parameters. Therefore, the setup stage is not necessary to create face animation. The setup stage is used to customize the face at the decoder.

#### 6.1.5.1 Structure of the face object bitstream

A face object is formed by a temporal sequence of face object planes. This is depicted as follows in Figure 6-9.





Figure 6-9 -- Structure of the face object bitstream


A face object represents a node in an ISO/IEC 14496 scene graph. An ISO/IEC 14496 scene is understood as a composition of Audio-Visual objects according to some spatial and temporal relationships. The scene graph is the hierarchical representation of the ISO/IEC 14496 scene structure (see ISO/IEC 14496-1).

Alternatively, a face object can be formed by a temporal sequence of face object plane groups (called segments for simplicity), where each face object plane group itself is composed of a temporal sequence of 16 face object planes, as depicted in the following:

##### face object:



##### face object plane group:



When the alternative face object bitstream structure is employed, the bitstream is decoded by DCT-based face object decoding as described in subclause 7.12.2. Otherwise, the bitstream is decoded by the frame-based face object decoding. Refer to Table C-1 for a specification of default minimum and maximum values for each FAP

#### 6.1.5.2 Facial animation parameter set

The FAPs are based on the study of minimal facial actions and are closely related to muscle actions. They represent a complete set of basic facial actions, and therefore allow the representation of most natural facial expressions. Exaggerated values permit the definition of actions that are normally not possible for humans, but could be desirable for cartoon-like characters.

The FAP set contains two high level parameters visemes and expressions. A viseme is a visual correlate to a phoneme. The viseme parameter allows viseme rendering (without having to express them in terms of other parameters) and enhances the result of other parameters, insuring the correct rendering of visemes. Only static visemes which are clearly distinguished are included in the standard set. Additional visemes may be added in future extensions of the standard. Similarly, the expression parameter allows definition of high level facial expressions. The facial expression parameter values are defined by textual descriptions. To facilitate facial animation, FAPs that can


be used together to represent natural expression are grouped together in FAP groups, and can be indirectly addressed by using an expression parameter. The expression parameter allows for a very efficient means of animating faces. In annex C, a list of the FAPs is given, together with the FAP grouping, and the definitions of the facial expressions.

#### 6.1.5.3 Facial animation parameter units

All the parameters involving translational movement are expressed in terms of the *Facial Animation Parameter Units (FAPU)*. These units are defined in order to allow interpretation of the FAPs on any facial model in a consistent way, producing reasonable results in terms of expression and speech pronunciation. They correspond to fractions of distances between some key facial features and are defined in terms of distances between feature points. The fractional units used are chosen to allow enough precision. annex C contains the list of the FAPs and the list of the FDP feature points. For each FAP the list contains the name, a short description, definition of the measurement units, whether the parameter is unidirectional (can have only positive values) or bi-directional, definition of the direction of movement for positive values, group number (for coding of selected groups), FDP subgroup number (annex C) and quantisation step size. FAPs act on FDP feature points in the indicated subgroups. The measurement units are shown in Table 6-1, where the notation 3.1.y represents the y coordinate of the feature point 3.1; also refer to Figure 6-10.

**Table 6-1 -- Facial Animation Parameter Units**

Description	FAPU Value
IRISD0 = 3.1.y – 3.3.y = 3.2.y – 3.4.y Iris diameter (by definition it is equal to the distance between upper and lower eyelid) in neutral face	IRISD = IRISD0 / 1024
ES0 = 3.5.x – 3.6.x Eye separation	ES = ES0 / 1024
ENS0 = 3.5.y – 9.15.y Eye - nose separation	ENS = ENS0 / 1024
MNS0 = 9.15.y – 2.2.y Mouth - nose separation	MNS = MNS0 / 1024
MW0 = 8.3.x – 8.4.x Mouth width	MW = MW0 / 1024
AU Angle Unit	$10^{-5}$ rad

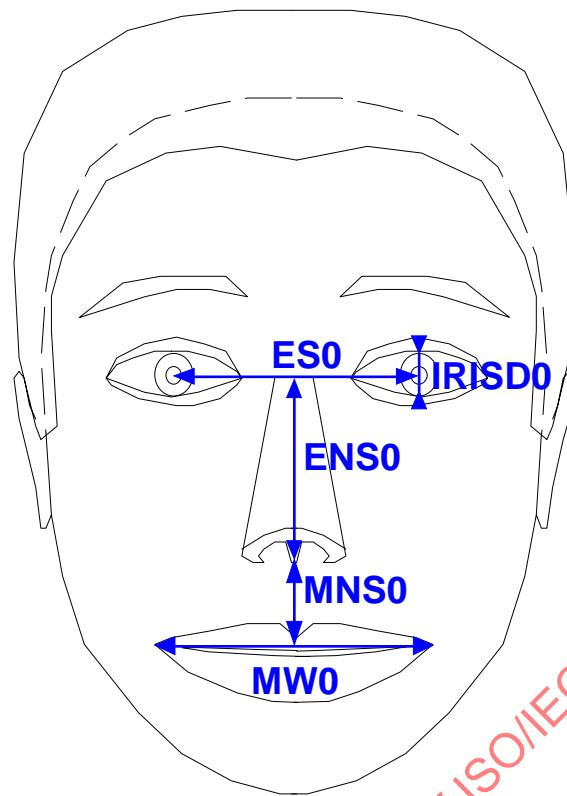

**Figure 6-10 -- The Facial Animation Parameter Units**

#### 6.1.5.4 Description of a neutral face

At the beginning of a sequence, the face is supposed to be in a neutral position. Zero values of the FAPs correspond to a neutral face. All FAPs are expressed as displacements from the positions defined in the neutral face. The neutral face is defined as follows:

- the coordinate system is right-handed; head axes are parallel to the world axes
- gaze is in direction of Z axis
- all face muscles are relaxed
- eyelids are tangent to the iris
- the pupil is one third of IRISD0
- lips are in contact; the line of the lips is horizontal and at the same height of lip corners
- the mouth is closed and the upper teeth touch the lower ones
- the tongue is flat, horizontal with the tip of tongue touching the boundary between upper and lower teeth (feature point 6.1 touching 9.11 in annex C)

#### 6.1.5.5 Facial definition parameter set

The FDPs are used to customize the proprietary face model of the decoder to a particular face or to download a face model along with the information about how to animate it. The definition and description of FDP fields is given in annex C. The FDPs are normally transmitted once per session, followed by a stream of compressed FAPs. However, if the decoder does not receive the FDPs, the use of FAPUs ensures that it can still interpret the FAP stream. This insures minimal operation in broadcast or teleconferencing applications. The FDP set is specified in

BIFS syntax (see ISO/IEC 14496-1). The FDP node defines the face model to be used at the receiver. Two options are supported:

- calibration information is downloaded so that the proprietary face of the receiver can be configured using facial feature points and optionally a 3D mesh or texture.
- a face model is downloaded with the animation definition of the Facial Animation Parameters. This face model replace the proprietary face model in the receiver.

## 6.2 Visual bitstream syntax

### 6.2.1 Start codes

Start codes are specific bit patterns that do not otherwise occur in the video stream.

Each start code consists of a start code prefix followed by a start code value. The start code prefix is a string of twenty three bits with the value zero followed by a single bit with the value one. The start code prefix is thus the bit string '0000 0000 0000 0000 0000 0001'.

The start code value is an eight bit integer which identifies the type of start code. Many types of start code have just one start code value. However `video_object_start_code` and `video_object_layer_start_code` are represented by many start code values.

All start codes shall be byte aligned. This shall be achieved by first inserting a bit with the value zero and then, if necessary, inserting bits with the value one before the start code prefix such that the first bit of the start code prefix is the first (most significant) bit of a byte. For stuffing of 1 to 8 bits, the codewords are as follows in Table 6-2.

Table 6-2-- Stuffing codewords

Bits to be stuffed	Stuffing Codeword
1	0
2	01
3	011
4	0111
5	01111
6	011111
7	0111111
8	01111111

Table 6-3 defines the start code values for all start codes used in the visual bitstream.

Table 6-3 — Start code values

name	start code value (hexadecimal)
<code>video_object_start_code</code>	00 through 1F
<code>video_object_layer_start_code</code>	20 through 2F
<code>reserved</code>	30 through AF
<code>visual_object_sequence_start_code</code>	B0

visual_object_sequence_end_code	B1
user_data_start_code	B2
group_of_vop_start_code	B3
video_session_error_code	B4
visual_object_start_code	B5
vop_start_code	B6
reserved	B7-B9
face_object_start_code	BA
face_object_plane_start_code	BB
mesh_object_start_code	BC
mesh_object_plane_start_code	BD
still_texture_object_start_code	BE
texture_spatial_layer_start_code	BF
texture_snr_layer_start_code	C0
reserved	C1-C5
System start codes (see note)	C6 through FF
NOTE System start codes are defined in ISO/IEC 14496-1	

The use of the start codes is defined in the following syntax description with the exception of the video\_session\_error\_code. The video\_session\_error\_code has been allocated for use by a media interface to indicate where uncorrectable errors have been detected.

This syntax for visual bitstreams defines two types of information:

1. Configuration information
  - a. Global configuration information, referring to the whole group of visual objects that will be simultaneously decoded and composited by a decoder (VisualObjectSequence()).
  - b. Object configuration information, referring to a single visual object (VO). This is associated with VisualObject().
  - c. Object layer configuration information, referring to a single layer of a single visual object (VOL) VisualObjectLayer()
2. Elementary stream data, containing the data for a single layer of a visual object.

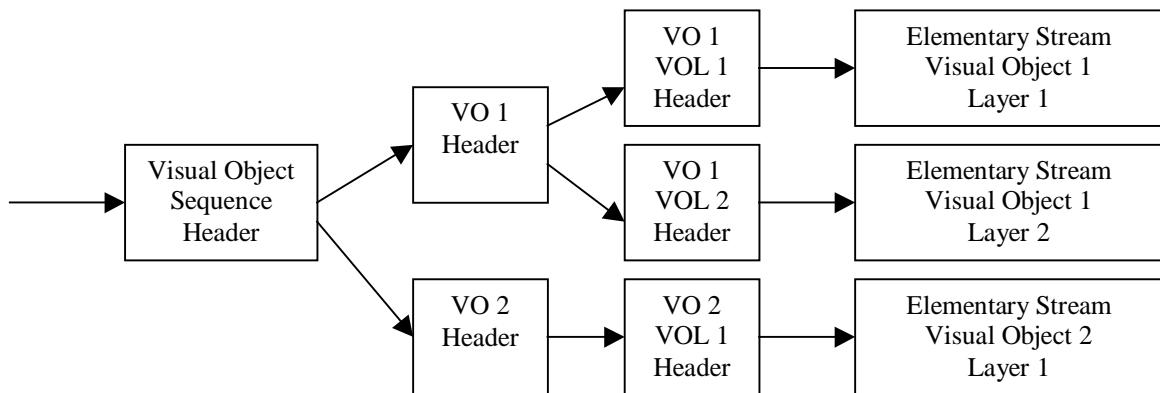


Figure 6-11 -- Example Visual Information – Logical Structure

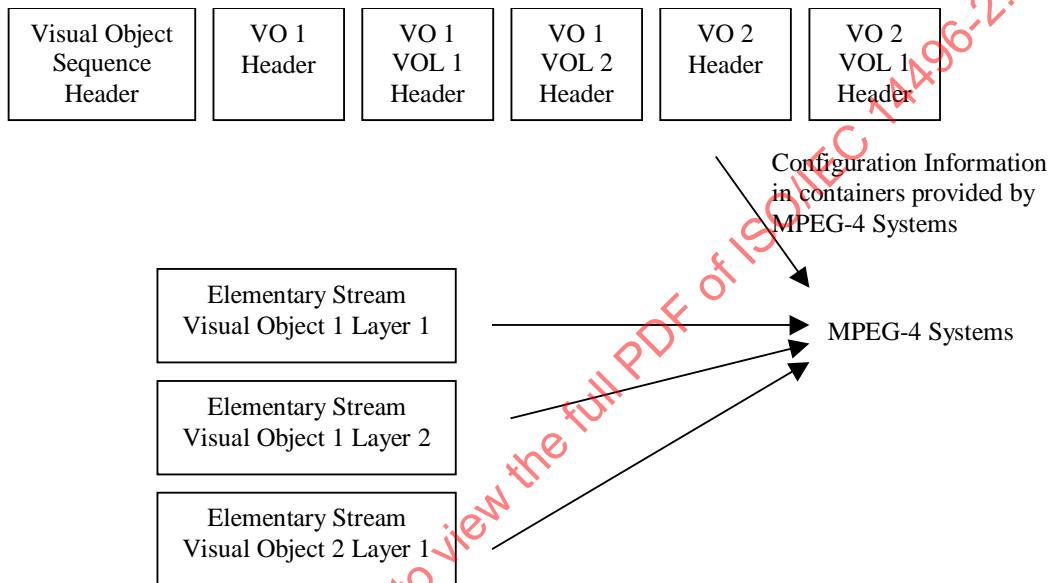


Figure 6-12 -- Example Visual Bitstream – Separate Configuration Information / Elementary Stream.

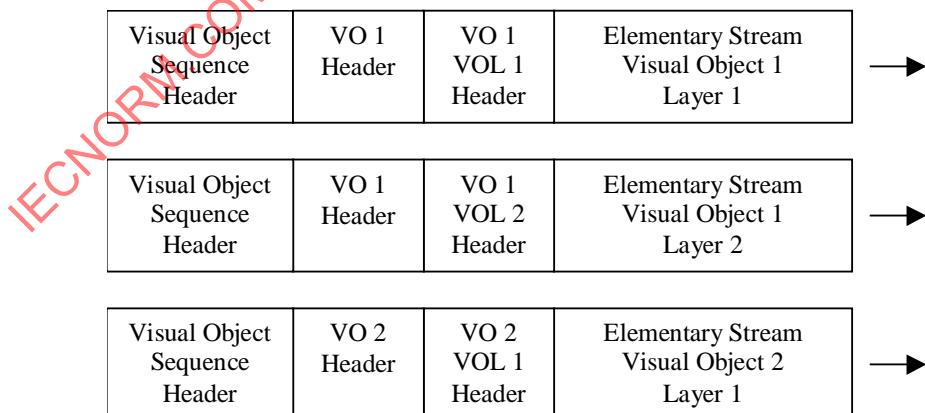


Figure 6-13 -- Example Visual Bitstream – Combined Configuration Information / Elementary Stream

The following functions are entry points for elementary streams, and entry into these functions defines the breakpoint between configuration information and elementary streams:

1. Group\_of\_VideoObjectPlane(),

2. VideoObjectPlane(),
3. video\_plane\_with\_short\_header(),
4. MeshObject(),
5. FaceObject().

For still texture objects, configuration information ends and elementary stream data begins in `StilTextureObject()` immediately before the first call to `wavelet_dc_decode()`, as indicated by the comment in subclause 6.2.8.

There is no overlap of syntax between configuration information and elementary streams.

The configuration information contains all data that is not part of an elementary stream, including that defined by `VisualObjectSequence()`, `VisualObject()` and `VideoObjectLayer()`.

ISO/IEC 14496-2 does not provide for the multiplexing of multiple elementary streams into a single bitstream. One visual bitstream contains exactly one elementary stream, which describes one layer of one visual object. A visual decoder must conceptually have a separate entry port for each layer of each object to be decoded.

Visual objects coded in accordance with this Part may be carried within a Systems bitstream as defined by ISO/IEC 14496-1. The coded visual objects may also be free standing or carried within other types of systems. Configuration information may be carried separately from or combined with elementary stream data:

1. *Separate Configuration / Elementary Streams (e.g. Inside ISO/IEC 14496-1 Bitstreams)*

When coded visual objects are carried within a Systems bitstream defined by ISO/IEC 14496-1, configuration information and elementary stream data are always carried separately. Configuration information and elementary streams follow the syntax below, subject to the break points between them defined above. The Systems specification ISO/IEC 14496-1 defines containers that are used to carry Visual Object and Visual Object Layer configuration information. A separate container is used for each object. For video objects, a separate container is also used for each layer. `VisualObjectSequence` headers are not carried explicitly, but the information is contained in other parts of the Systems bitstream.

2. *Combined Configuration / Elementary Streams*

The elementary stream data associated with a single layer may be wrapped in configuration information defined in accordance with the syntax below. A visual bitstream may contain at most one instance of each of `VisualObjectSequence()`, `VisualObject()` and `VideoObjectLayer()`. The Visual Object Sequence Header must be identical for all streams input simultaneously to a decoder. The Visual Object Headers for each layer of a multilayer object must be identical.

### 6.2.2 Visual Object Sequence and Visual Object

VisualObjectSequence() {	No. of bits	Mnemonic
<b>visual_object_sequence_start_code</b>	32	bslbf
<b>profile_and_level_indication</b>	8	uimsbf
while (next_bits() == user_data_start_code){		
user_data()		
}		
VisualObject()		
<b>visual_object_sequence_end_code</b>	32	bslbf
}		

VisualObject() {	No. of bits	Mnemonic
<b>visual_object_start_code</b>	32	bslbf

<b>is_visual_object_identifier</b>	1	uimsbf
if (is_visual_object_identifier) {		
<b>visual_object_verid</b>	4	uimsbf
<b>visual_object_priority</b>	3	uimsbf
}		
<b>visual_object_type</b>	4	uimsbf
if (visual_object_type == "video ID"    visual_object_type == "still texture ID") {		
<b>video_signal_type()</b>		
}		
<b>next_start_code()</b>		
while (next_bits() == user_data_start_code) {		
<b>user_data()</b>		
}		
if (visual_object_type == "video ID") {		
<b>video_object_start_code</b>	32	bslbf
<b>VideoObjectLayer()</b>		
}		
else if (visual_object_type == "still texture ID") {		
<b>StillTextureObject()</b>		
}		
else if (visual_object_type == "mesh ID") {		
<b>MeshObject()</b>		
}		
else if (visual_object_type == "face ID") {		
<b>FaceObject()</b>		
}		
if (next_bits() != "0000 0000 0000 0000 0000 0001")		
<b>next_start_code()</b>		
}		

	<b>No. of bits</b>	<b>Mnemonic</b>
<b>video_signal_type()</b> {		
<b>video_signal_type</b>	1	bslbf
if (video_signal_type) {		
<b>video_format</b>	3	uimsbf
<b>video_range</b>	1	bslbf

<b>colour_description</b>	1	bslbf
if (colour_description) {		
<b>colour_primaries</b>	8	uimsbf
<b>transfer_characteristics</b>	8	uimsbf
<b>matrix_coefficients</b>	8	uimsbf
}		
}		
}		

#### 6.2.2.1 User data

	<b>No. of bits</b>	<b>Mnemonic</b>
user_data()		
<b>user_data_start_code</b>	32	bslbf
while( next_bits() != '0000 0000 0000 0000 0000 0001' ) {		
<b>user_data</b>	8	uimsbf
}		
next_start_code()		
}		

#### 6.2.3 Video Object Layer

	<b>No. of bits</b>	<b>Mnemonic</b>
VideoObjectLayer()		
if(next_bits() == video_object_layer_start_code) {		
short_video_header = 0		
<b>video_object_layer_start_code</b>	32	bslbf
<b>random_accessible_vol</b>	1	bslbf
<b>video_object_type_indication</b>	8	uimsbf
<b>is_object_layer_identifier</b>	1	uimsbf
if (is_object_layer_identifier) {		
<b>video_object_layer_verid</b>	4	uimsbf
<b>video_object_layer_priority</b>	3	uimsbf
}		
<b>aspect_ratio_info</b>	4	uimsbf
if (aspect_ratio_info == "extended_PAR") {		
<b>par_width</b>	8	uimsbf
<b>par_height</b>	8	uimsbf
}		

<b>vol_control_parameters</b>	1	bslbf
if (vol_control_parameters) {		
<b>chroma_format</b>	2	uimsbf
<b>low_delay</b>	1	uimsbf
<b>vbv_parameters</b>	1	blsbf
if (vbv_parameters) {		
<b>first_half_bit_rate</b>	15	uimsbf
<b>marker_bit</b>	1	bslbf
<b>latter_half_bit_rate</b>	15	uimsbf
<b>marker_bit</b>	1	bslbf
<b>first_half_vbv_buffer_size</b>	15	uimsbf
<b>marker_bit</b>	1	bslbf
<b>latter_half_vbv_buffer_size</b>	3	uimsbf
<b>first_half_vbv_occupancy</b>	11	uimsbf
<b>marker_bit</b>	1	blsbf
<b>latter_half_vbv_occupancy</b>	15	uimsbf
<b>marker_bit</b>	1	blsbf
}		
}		
<b>video_object_layer_shape</b>	2	uimsbf
<b>marker_bit</b>	1	bslbf
<b>vop_time_increment_resolution</b>	16	uimsbf
<b>marker_bit</b>	1	bslbf
<b>fixed_vop_rate</b>	1	bslbf
if (fixed_vop_rate)		
<b>fixed_vop_time_increment</b>	1-16	uimsbf
if (video_object_layer_shape != "binary only") {		
if (video_object_layer_shape == "rectangular") {		
<b>marker_bit</b>	1	bslbf
<b>video_object_layer_width</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>video_object_layer_height</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
}		
<b>interlaced</b>	1	bslbf

<b>obmc_disable</b>	1	bslbf
<b>sprite_enable</b>	1	bslbf
if (sprite_enable) {		
<b>sprite_width</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>sprite_height</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>sprite_left_coordinate</b>	13	simsbf
<b>marker_bit</b>	1	bslbf
<b>sprite_top_coordinate</b>	13	simsbf
<b>marker_bit</b>	1	bslbf
<b>no_of_sprite_warping_points</b>	6	uimsbf
<b>sprite_warping_accuracy</b>	2	uimsbf
<b>sprite_brightness_change</b>	1	bslbf
<b>low_latency_sprite_enable</b>	1	bslbf
}		
<b>not_8_bit</b>	1	bslbf
if (not_8_bit) {		
<b>quant_precision</b>	4	uimsbf
<b>bits_per_pixel</b>	4	uimsbf
}		
if (video_object_layer_shape=="grayscale") {		
<b>no_gray_quant_update</b>	1	bslbf
<b>composition_method</b>	1	bslbf
<b>linear_composition</b>	1	bslbf
}		
<b>quant_type</b>	1	bslbf
if (quant_type) {		
<b>load_intra_quant_mat</b>	1	bslbf
if (load_intra_quant_mat)		
<b>intra_quant_mat</b>	8*[2-64]	uimsbf
<b>load_nonintra_quant_mat</b>	1	bslbf
if (load_nonintra_quant_mat)		
<b>nonintra_quant_mat</b>	8*[2-64]	uimsbf
if(video_object_layer_shape=="grayscale") {		
<b>load_intra_quant_mat_grayscale</b>	1	bslbf

if(load_intra_quant_mat_grayscale)		
<b>intra_quant_mat_grayscale</b>	8*[2-64]	uimsbf
<b>load_nonintra_quant_mat_grayscale</b>	1	bslbf
if(load_nonintra_quant_mat_grayscale)		
<b>nonintra_quant_mat_grayscale</b>	8*[2-64]	uimsbf
}		
}		
<b>complexity_estimation_disable</b>	1	bslbf
if (!complexity_estimation_disable)		
<b>define_vop_complexity_estimation_header()</b>		
<b>resync_marker_disable</b>	1	bslbf
<b>data_partitioned</b>	1	bslbf
if(data_partitioned)		
<b>reversible_vlc</b>	1	bslbf
<b>scalability</b>	1	bslbf
if (scalability) {		
<b>hierarchy_type</b>	1	bslbf
<b>ref_layer_id</b>	4	uimsbf
<b>ref_layer_sampling_direc</b>	1	bslbf
<b>hor_sampling_factor_n</b>	5	uimsbf
<b>hor_sampling_factor_m</b>	5	uimsbf
<b>vert_sampling_factor_n</b>	5	uimsbf
<b>vert_sampling_factor_m</b>	5	uimsbf
<b>enhancement_type</b>	1	bslbf
}		
}		
else		
<b>resync_marker_disable</b>	1	bslbf
<b>next_start_code()</b>		
while ( next_bits()== user_data_start_code){		
<b>user_data()</b>		
}		
if (sprite_enable && !low_latency_sprite_enable)		
<b>VideoObjectPlane()</b>		
do {		

if (next_bits() == group_of_vop_start_code)		
Group_of_VideoObjectPlane()		
VideoObjectPlane()		
} while ((next_bits() == group_of_vop_start_code)		
(next_bits() == vop_start_code))		
}		
else {		
short_video_header = 1		
do {		
video_plane_with_short_header()		
} while(next_bits() == short_video_start_marker)		
}		
}		

define_vop_complexity_estimation_header() {	No. of bits	Mnemonic
<b>estimation_method</b>	2	uimsbf
if (estimation_method =='00') {		
<b>shape_complexity_estimation_disable</b>	1	
if (!shape_complexity_estimation_disable) {		bslbf
<b>opaque</b>	1	bslbf
<b>transparent</b>	1	bslbf
<b>intra_cae</b>	1	bslbf
<b>inter_cae</b>	1	bslbf
<b>no_update</b>	1	bslbf
<b>upsampling</b>	1	bslbf
}		
<b>texture_complexity_estimation_set_1_disable</b>	1	bslbf
if (!texture_complexity_estimation_set_1_disable) {		
<b>intra_blocks</b>	1	bslbf
<b>inter_blocks</b>	1	bslbf
<b>inter4v_blocks</b>	1	bslbf
<b>not_coded_blocks</b>	1	bslbf
}		
<b>marker_bit</b>	1	bslbf
<b>texture_complexity_estimation_set_2_disable</b>	1	bslbf
if (!texture_complexity_estimation_set_2_disable) {		

<b>dct_coefs</b>	1	bslbf
<b>dct_lines</b>	1	bslbf
<b>vlc_symbols</b>	1	bslbf
<b>vlc_bits</b>	1	bslbf
}		
<b>motion_compensation_complexity_disable</b>	1	bslbf
If (!motion_compensation_complexity_disable) {		
<b>apm</b>	1	bslbf
<b>npm</b>	1	bslbf
<b>interpolate_mc_q</b>	1	bslbf
<b>forw_back_mc_q</b>	1	bslbf
<b>halfpel2</b>	1	bslbf
<b>halfpel4</b>	1	bslbf
}		
<b>marker_bit</b>	1	bslbf
}		
}		

#### 6.2.4 Group of Video Object Plane

Group_of_VideoObjectPlane() {	No. of bits	Mnemonic
<b>group_vop_start_codes</b>	32	bslbf
<b>time_code</b>	18	
<b>closed_gov</b>	1	bslbf
<b>broken_link</b>	1	bslbf
<b>next_start_code()</b>		
<b>while ( next_bits() == user_data_start_code){</b>		
<b>user_data()</b>		
<b>}</b>		
}		

#### 6.2.5 Video Object Plane and Video Plane with Short Header

VideoObjectPlane() {	No. of bits	Mnemonic
<b>vop_start_code</b>	32	bslbf
<b>vop_coding_type</b>	2	uimsbf
<b>do {</b>		

<b>modulo_time_base</b>	1	bslbf
} while (modulo_time_base != '0')		
<b>marker_bit</b>	1	bslbf
<b>vop_time_increment</b>	1-16	uimsbf
<b>marker_bit</b>	1	bslbf
<b>vop_coded</b>	1	bslbf
if (vop_coded == '0') {		
next_start_code()		
return()		
}		
if ((video_object_layer_shape != "binary only") && (vop_coding_type == "P"))		
<b>vop_rounding_type</b>	1	bslbf
if (video_object_layer_shape != "rectangular") {		
if(!sprite_enable && vop_coding_type == "l") {		
<b>vop_width</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>vop_height</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>vop_horizontal_mc_spatial_ref</b>	13	simsbf
<b>marker_bit</b>	1	bslbf
<b>vop_vertical_mc_spatial_ref</b>	13	simsbf
}		
if ((video_object_layer_shape != " binary only") && scalability && enhancement_type)		
<b>background_composition</b>	1	bslbf
<b>change_conv_ratio_disable</b>	1	bslbf
<b>vop_constant_alpha</b>	1	bslbf
if (vop_constant_alpha)		
<b>vop_constant_alpha_value</b>	8	bslbf
}		
if (!complexity_estimation_disable)		
read_vop_complexity_estimation_header()		
if (video_object_layer_shape != "binary only") {		
<b>intra_dc_vlc_thr</b>	3	uimsbf
if (interlaced) {		

<b>top_field_first</b>	1	bslbf
<b>alternate_vertical_scan_flag</b>	1	bslbf
}		
}		
if (sprite_enable && vop_coding_type == "S") {		
if (no_sprite_points > 0)		
sprite_trajectory()		
if (sprite_brightness_change)		
brightness_change_factor()		
if (sprite_transmit_mode != "stop"		
&& low_latency_sprite_enable) {		
do {		
<b>sprite_transmit_mode</b>	2	uimsbf
if ((sprite_transmit_mode == "piece")		
(sprite_transmit_mode == "update"))		
decode_sprite_piece()		
} while (sprite_transmit_mode != "stop" &&		
sprite_transmit_mode != "pause")		
}		
next_start_code()		
return()		
}		
if (video_object_layer_shape != "binary only") {		
<b>vop_quant</b>	3-9	uimsbf
if(video_object_layer_shape=="grayscale")		
<b>vop_alpha_quant</b>	6	uimsbf
if (vop_coding_type != "I")		
<b>vop_fcode_forward</b>	3	uimsbf
if (vop_coding_type == "B")		
<b>vop_fcode_backward</b>	3	uimsbf
if (!scalability) {		
if (video_object_layer_shape != "rectangular"		
&& vop_coding_type != "I")		
<b>vop_shape_coding_type</b>	1	bslbf
motion_shape_texture()		
while (nextbits_bytealigned() == resync_marker) {		

video_packet_header()		
motion_shape_texture()		
}		
}		
else {		
if (enhancement_type) {		
<b>load_backward_shape</b>	1	bslbf
if (load_backward_shape) {		
<b>backward_shape_width</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>backward_shape_height</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>backward_shape_horizontal_mc_spatial_ref</b>	13	simsbf
<b>marker_bit</b>	1	bslbf
<b>backward_shape_vertical_mc_spatial_ref</b>	13	simsbf
backward_shape()		
<b>load_forward_shape</b>	1	bslbf
if (load_forward_shape) {		
<b>forward_shape_width</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>forward_shape_height</b>	13	uimsbf
<b>marker_bit</b>	1	bslbf
<b>forward_shape_horizontal_mc_spatial_ref</b>	13	simsbf
<b>marker_bit</b>	1	bslbf
<b>forward_shape_vertical_mc_spatial_ref</b>	13	simsbf
forward_shape()		
}		
}		
}		
<b>ref_select_code</b>	2	uimsbf
combined_motion_shape_texture()		
}		
}		
else {		
combined_motion_shape_texture()		
while (nextbits_bytaligned() == resync_marker) {		

IECNORM.COM: Click to view the full PDF of ISO/IEC 14496-2:1999

video_packet_header()		
combined_motion_shape_texture()		
}		
}		
next_start_code()		
}		

#### 6.2.5.1 Complexity Estimation Header

read_vop_complexity_estimation_header() {	No. of bits	Mnemonic
if (estimation_method=='00') {		
if (vop_coding_type=="I") {		
if (opaque) <b>dcecs_opaque</b>	8	uimsbf
if (transparent) <b>dcecs_transparent</b>	8	uimsbf
if (intra_cae) <b>dcecs_intra_cae</b>	8	uimsbf
if (inter_cae) <b>dcecs_inter_cae</b>	8	uimsbf
if (no_update) <b>dcecs_no_update</b>	8	uimsbf
if (upsampling) <b>dcecs_upsampling</b>	8	uimsbf
if (intra_blocks) <b>dcecs_intra_blocks</b>	8	uimsbf
if (not_coded_blocks) <b>dcecs_not_coded_blocks</b>	8	uimsbf
if (dct_coefs) <b>dcecs_dct_coefs</b>	8	uimsbf
if (dct_lines) <b>dcecs_dct_lines</b>	8	uimsbf
if (vlc_symbols) <b>dcecs_vlc_symbols</b>	8	uimsbf
if (vlc_bits) <b>dcecs_vlc_bits</b>	4	uimsbf
}		
if (vop_coding_type=="P") {		
if (opaque) <b>dcecs_opaque</b>	8	uimsbf
if (transparent) <b>dcecs_transparent</b>	8	uimsbf
if (intra_cae) <b>dcecs_intra_cae</b>	8	uimsbf
if (inter_cae) <b>dcecs_inter_cae</b>	8	uimsbf
if (no_update) <b>dcecs_no_update</b>	8	uimsbf
if (upsampling) <b>dcecs_upsampling</b>	8	uimsbf
if (intra) <b>dcecs_intra_blocks</b>	8	uimsbf
if (not_coded) <b>dcecs_not_coded_blocks</b>	8	uimsbf
if (dct_coefs) <b>dcecs_dct_coefs</b>	8	uimsbf
if (dct_lines) <b>dcecs_dct_lines</b>	8	uimsbf

if (vlc_symbols)	<b>dcecs_vlc_symbols</b>	8	uimsbf
if (vlc_bits)	<b>dcecs_vlc_bits</b>	4	uimsbf
if (inter_blocks)	<b>dcecs_inter_blocks</b>	8	uimsbf
if (inter4v_blocks)	<b>dcecs_inter4v_blocks</b>	8	uimsbf
if (apm)	<b>dcecs_apm</b>	8	uimsbf
if (npm)	<b>dcecs_npm</b>	8	uimsbf
if (forw_back_mc_q)	<b>dcecs_forw_back_mc_q</b>	8	uimsbf
if (halfpel2)	<b>dcecs_halfpel2</b>	8	uimsbf
if (halfpel4)	<b>dcecs_halfpel4</b>	8	uimsbf
}			
if (vop_coding_type=='B') {			
if (opaque)	<b>dcecs_opaque</b>	8	uimsbf
if (transparent)	<b>dcecs_transparent</b>	8	uimsbf
if (intra_cae)	<b>dcecs_intra_cae</b>	8	uimsbf
if (inter_cae)	<b>dcecs_inter_cae</b>	8	uimsbf
if (no_update)	<b>dcecs_no_update</b>	8	uimsbf
if (upsampling)	<b>dcecs_upsampling</b>	8	uimsbf
if (intra_blocks)	<b>dcecs_intra_blocks</b>	8	uimsbf
if (not_coded_blocks)	<b>dcecs_not_coded_blocks</b>	8	uimsbf
if (dct_coefs)	<b>dcecs_dct_coefs</b>	8	uimsbf
if (dct_lines)	<b>dcecs_dct_lines</b>	8	uimsbf
if (vlc_symbols)	<b>dcecs_vlc_symbols</b>	8	uimsbf
if (vlc_bits)	<b>dcecs_vlc_bits</b>	4	uimsbf
if (inter_blocks)	<b>dcecs_inter_blocks</b>	8	uimsbf
if (inter4v_blocks)	<b>dcecs_inter4v_blocks</b>	8	uimsbf
if (apm)	<b>dcecs_apm</b>	8	uimsbf
if (npm)	<b>dcecs_npm</b>	8	uimsbf
if (forw_back_mc_q)	<b>dcecs_forw_back_mc_q</b>	8	uimsbf
if (halfpel2)	<b>dcecs_halfpel2</b>	8	uimsbf
if (halfpel4)	<b>dcecs_halfpel4</b>	8	uimsbf
if (interpolate_mc_q)	<b>dcecs_interpolate_mc_q</b>	8	uimsbf
}			
if (vop_coding_type=='S') {			
if (intra_blocks)	<b>dcecs_intra_blocks</b>	8	uimsbf
if (not_coded_blocks)	<b>dcecs_not_coded_blocks</b>	8	uimsbf
if (dct_coefs)	<b>dcecs_dct_coefs</b>	8	uimsbf

if (dct_lines)	<b>dcecs_dct_lines</b>	8	uimsbf
if (vlc_symbols)	<b>dcecs_vlc_symbols</b>	8	uimsbf
if (vlc_bits)	<b>dcecs_vlc_bits</b>	4	uimsbf
if (inter_blocks)	<b>dcecs_inter_blocks</b>	8	uimsbf
if (inter4v_blocks)	<b>dcecs_inter4v_blocks</b>	8	uimsbf
if (apm)	<b>dcecs_apm</b>	8	uimsbf
if (npm)	<b>dcecs_npm</b>	8	uimsbf
if (forw_back_mc_q)	<b>dcecs_forw_back_q</b>	8	uimsbf
if (halfpel2)	<b>dcecs_halfpel2</b>	8	uimsbf
if (halfpel4)	<b>dcecs_halfpel4</b>	8	uimsbf
if (interpolate_mc_q)	<b>dcecs_interpolate_mc_q</b>	8	uimsbf
}			
}			
}			

#### 6.2.5.2 Video Plane with Short Header

video_plane_with_short_header() {	No. of bits	Mnemonic
<b>short_video_start_marker</b>	22	bslbf
<b>temporal_reference</b>	8	uimsbf
<b>marker_bit</b>	1	bslbf
<b>zero_bit</b>	1	bslbf
<b>split_screen_indicator</b>	1	bslbf
<b>document_camera_indicator</b>	1	bslbf
<b>full_picture_freeze_release</b>	1	bslbf
<b>source_format</b>	3	bslbf
<b>picture_coding_type</b>	1	bslbf
<b>four_reserved_zero_bits</b>	4	bslbf
<b>vop_quant</b>	5	uimsbf
<b>zero_bit</b>	1	bslbf
do{		
<b>pei</b>	1	bslbf
if (pei == "1")		
<b>psupp</b>	8	bslbf
} while (pei == "1")		
<b>gob_number = 0</b>		

for(i=0; i<num_gobs_in_vop; i++)		
gob_layer()		
if(next_bits() == short_video_end_marker)		
<b>short_video_end_marker</b>	22	uimsbf
while(!bytealigned())		
<b>zero_bit</b>	1	bslbf
}		

<b>gob_layer() {</b>	<b>No. of bits</b>	<b>Mnemonic</b>
gob_header_empty = 1		
if(gob_number != 0) {		
if (next_bits() == gob_resync_marker) {		
gob_header_empty = 0		
<b>gob_resync_marker</b>	17	bslbf
<b>gob_number</b>	5	uimsbf
<b>gob_frame_id</b>	2	bslbf
<b>quant_scale</b>	5	uimsbf
}		
}		
for(i=0; i<num_macroblocks_in_gob; i++)		
macroblock()		
if(next_bits() != gob_resync_marker && nextbits_bytealigned() == gob_resync_marker)		
while(!bytealigned())		
<b>zero_bit</b>	1	bslbf
<b>gob_number++</b>		
}		

<b>video_packet_header() {</b>	<b>No. of bits</b>	<b>Mnemonic</b>
next_resync_marker()		
<b>resync_marker</b>	17-23	uimsbf
<b>macroblock_number</b>	1-14	vlclbf
if (video_object_layer_shape != "binary only")		
<b>quant_scale</b>	5	uimsbf
<b>header_extension_code</b>	1	bslbf
if (header_extension_code) {		

do {		
<b>modulo_time_base</b>	1	bslbf
} while (modulo_time_base != '0')		
<b>marker_bit</b>	1	bslbf
<b>vop_time_increment</b>	1-16	bslbf
<b>marker_bit</b>	1	bslbf
<b>vop_coding_type</b>	2	uimsbf
if (video_object_layer_shape != "binary only") {		
<b>intra_dc_vlc_thr</b>	3	uimsbf
if (vop_coding_type != "I")		
<b>vop_fcode_forward</b>	3	uimsbf
if (vop_coding_type == "B")		
<b>vop_fcode_backward</b>	3	uimsbf
}		
}		
}		

### 6.2.5.3 Motion Shape Texture

<b>motion_shape_texture()</b> {	<b>No. of bits</b>	<b>Mnemonic</b>
if (data_partitioned )		
<b>data_partitioned_motion_shape_texture()</b>		
else		
<b>combined_motion_shape_texture()</b>		
}		

<b>combined_motion_shape_texture()</b> {	<b>No. of bits</b>	<b>Mnemonic</b>
<b>do{</b>		
<b>macroblock()</b>		
} while (nextbits_bytealigned() != resync_marker && nextbits_bytealigned() != '000 0000 0000 0000 0000 0000')		
}		

<b>data_partitioned_motion_shape_texture()</b> {	<b>No. of bits</b>	<b>Mnemonic</b>
if (vop_coding_type == "I") {		
<b>data_partitioned_i_vop()</b>		

{ } else if (vop_coding_type == "P") { data_partitioned_p_vop() } else if (vop_coding_type == "B") { combined_motion_shape_texture() }		
NOTE Data partitioning is not supported in B-VOPs.		

data_partitioned_i_vop() { do{ if (video_object_layer_shape != "rectangular"){ <b>bab_type</b> if (bab_type >= 4) { if (!change_conv_rate_disable) <b>conv_ratio</b> <b>scan_type</b> binary_arithmetic_code() } } if (!transparent_mb()) { <b>mcpc</b> if (mb_type == 4) <b>dquant</b> if (use_intra_dc_vlc) { for (j = 0; j < 4; j++) if (!transparent_block(j)) { <b>dct_dc_size_luminance</b> if (dct_dc_size_luminance > 0) <b>dct_dc_differential</b> if (dct_dc_size_luminance > 8) <b>marker_bit</b> } } } for (j = 0; j < 2; j++) { <b>dct_dc_size_chrominance</b> if (dct_dc_size_chrominance > 0) <b>dct_dc_differential</b> if (dct_dc_size_chrominance > 8) } } } } <th>No. of bits</th> <th>Mnemonic</th>	No. of bits	Mnemonic

marker_bit	1	bslbf
}		
}		
}		
} while (next_bits() != dc_marker)		
<b>dc_marker</b> /* 110 1011 0000 0000 0001 */	19	bslbf
for (i = 0; i < mb_in_video_packet; i++) {		
if (!transparent_mb()) {		
<b>ac_pred_flag</b>	1	bslbf
<b>cbpy</b>	1-6	vlclbf
}		
}		
for (i = 0; i < mb_in_video_packet; i++) {		
if (!transparent_mb()) {		
for (j = 0; j < block_count; j++)		
block(j)		
}		
}		
}		
NOTE The value of block_count is 6 in the 4:2:0 format. The value of alpha_block_count is 4.		

	No. of bits	Mnemonic
data_partitioned_p_vop() {		
do{		
if (video_object_layer_shape != "rectangular") {		
<b>bab_type</b>	1-7	vlclbf
if ((bab_type == 1)    (bab_type == 6)) {		
<b>mvds_x</b>	1-18	vlclbf
<b>mvds_y</b>	1-18	vlclbf
}		
if (bab_type >= 4) {		
if (!change_conv_rate_disable) <b>conv_ratio</b>	1-2	vlclbf
<b>scan_type</b>	1	bslbf
binary_arithmetic_code()		
}		
}		

if (!transparent_mb()) {		
<b>not_coded</b>	1	bslbf
if (!not_coded) {		
<b>mcbpc</b>	1-9	vlclbf
if (derived_mb_type < 3)		
motion_coding("forward", derived_mb_type)		
}		
}		
}		
<b>while</b> (next_bits() != motion_marker)		
<b>motion_marker</b> /* 1 1111 0000 0000 0001 */	17	bslbf
<b>for</b> (i = 0; i < mb_in_video_packet; i++) {		
if (!transparent_mb()) {		
if ( !not_coded){		
if (derived_mb_type >= 3)		
<b>ac_pred_flag</b>	1	bslbf
<b>cbpy</b>	1-6	vlclbf
if (derived_mb_type == 1    derived_mb_type == 4)		
<b>dquant</b>	2	bslbf
if (derived_mb_type >= 3 && use_intra_dc_vlc ) {		
<b>for</b> (j = 0; j < 4; j++) {		
if (!transparent_block(j)) {		
<b>dct_dc_size_luminance</b>	2-11	vlclbf
if (dct_dc_size_luminance > 0)		
<b>dct_dc_differential</b>	1-12	vlclbf
if (dct_dc_size_luminance > 8)		
<b>marker_bit</b>	1	bslbf
}		
}		
<b>for</b> (j = 0; j < 2; j++) {		
<b>dct_dc_size_chrominance</b>	2-12	vlclbf
if (dct_dc_size_chrominance > 0)		
<b>dct_dc_differential</b>	1-12	vlclbf
if (dct_dc_size_chrominance > 8)		
<b>marker_bit</b>	1	bslbf
}		
}		

}		
}		
}		
for (i = 0; i < mb_in_video_packet; i++) {		
if (!transparent_mb()) {		
if ( ! not_coded) {		
for (j = 0; j < block_count; j++)		
block(j)		
}		
}		
}		
}		
NOTE The value of block_count is 6 in the 4:2:0 format. The value of alpha_block_count is 4.		

<code>motion_coding(mode, type_of_mb) {</code>	<b>No. of bits</b>	<b>Mnemonic</b>
<code>    motion_vector(mode)</code>		
<code>    if (type_of_mb == 2) {</code>		
<code>        for (i = 0; i &lt; 3; i++)</code>		
<code>            motion_vector(mode)</code>		
<code>    }</code>		
<code>}</code>		

#### 6.2.5.4 Sprite coding

<code>decode_sprite_piece() {</code>	<b>No. of bits</b>	<b>Mnemonic</b>
<code>    piece_quant</code>	5	bslbf
<code>    piece_width</code>	9	bslbf
<code>    piece_height</code>	9	bslbf
<code>    marker_bit</code>	1	bslbf
<code>    piece_xoffset</code>	9	bslbf
<code>    piece_yoffset</code>	9	bslbf
<code>    sprite_shape_texture()</code>		
<code>}</code>		

<code>sprite_shape_texture() {</code>	<b>No. of bits</b>	<b>Mnemonic</b>
<code>    if (sprite_transmit_mode == "piece") {</code>		

for (i=0; i < piece_height; i++) {		
for (j=0; j < piece_width; j++) {		
if ( !send_mb()) {		
macroblock()		
}		
}		
}		
if (sprite_transmit_mode == "update") {		
for (i=0; i < piece_height; i++) {		
for (j=0; j < piece_width; j++) {		
macroblock()		
}		
}		
}		

sprite_trajectory() {	No. of bits	Mnemonic
for (i=0; i < no_of_sprite_warping_points; i++) {		
warping_mv_code(du[i])		
warping_mv_code(dv[i])		
}		
}		

warping_mv_code(d) {	No. of bits	Mnemonic
<b>dmv_length</b>	2-12	uimsbf
if (dmv_length != '00')		
<b>dmv_code</b>	1-14	uimsbf
<b>marker_bit</b>	1	bslbf
}		

brightness_change_factor() {	No. of bits	Mnemonic
<b>brightness_change_factor_size</b>	1-4	uimsbf
<b>brightness_change_factor_code</b>	5-10	uimsbf
}		

## 6.2.6 Macroblock

macroblock()	No. of bits	Mnemonic
if (vop_coding_type != "B") {		
if (video_object_layer_shape != "rectangular" && !(sprite_enable && low_latency_sprite_enable && sprite_transmit_mode == "update"))		
mb_binary_shape_coding()		
if (video_object_layer_shape != "binary only") {		
if (!transparent_mb()) {		
if (vop_coding_type != "I" && !(sprite_enable && sprite_transmit_mode == "piece"))		
<b>not_coded</b>	1	bslbf
if (!not_coded    vop_coding_type == "I") {		
<b>mcbpc</b>	1-9	vlclbf
if (!short_video_header && (derived_mb_type == 3    derived_mb_type == 4))		
<b>ac_pred_flag</b>	1	bslbf
if (derived_mb_type != "stuffing")		
<b>cbpy</b>	1-6	vlclbf
else		
return()		
if (derived_mb_type == 1    derived_mb_type == 4)		
<b>dquant</b>	2	bslbf
if (interlaced)		
interlaced_information()		
if ( !(ref_select_code=='11' && scalability) && vop_coding_type != "S") {		
if (derived_mb_type == 0    derived_mb_type == 1) {		
motion_vector("forward")		
if (interlaced && field_prediction)		
motion_vector("forward")		
}		
if (derived_mb_type == 2) {		

for (j=0; j < 4; j++)		
if (!transparent_block(j))		
motion_vector("forward")		
}		
}		
for (i = 0; i < block_count; i++)		
if(!transparent_block(i))		
block(i)		
}		
}		
}		
else {		
if (video_object_layer_shape != "rectangular")		
mb_binary_shape_coding()		
if ((co_located_not_coded != 1		
(scalability && (ref_select_code != '11'		
enhancement_type == 1)))		
&& video_object_layer_shape != "binary only") {		
if (!transparent_mb()) {		
<b>modb</b>	1-2	vlclbf
if (modb != '1') {		
<b>mb_type</b>	1-4	vlclbf
if (modb == '00')		
<b>cbpb</b>	3-6	vlclbf
if (ref_select_code != '00'    !scalability) {		
if (mb_type != "1" && cbpb!=0)		
<b>dbquant</b>	1-2	vlclbf
if (interlaced)		
interlaced_information()		
if (mb_type == '01'		
mb_type == '0001') {		
motion_vector("forward")		
if (interlaced && field_prediction)		
motion_vector("forward")		
}		

if (mb_type == '01'    mb_type == '001') {		
motion_vector("backward")		
if (interlaced && field_prediction)		
motion_vector("backward")		
}		
if (mb_type == "1")		
motion_vector("direct")		
}		
if (ref_select_code == '00' && scalability &&		
cbpb !=0 ) {		
<b>dbquant</b>	1-2	vlclbf
if (mb_type == '01'    mb_type == '1')		
motion_vector("forward")		
}		
for (i = 0; i < block_count; i++)		
if(!transparent_block(i))		
block(i)		
}		
}		
}		
}		
if(video_object_layer_shape=="grayscale"		
&& !transparent_mb()) {		
if(vop_coding_type=="I"   (vop_coding_type=="P"		
&& !not_coded		
&& (derived_mb_type==3    derived_mb_type==4))) {		
<b>coda_i</b>	1	bslbf
if(coda_i=="coded") {		
<b>ac_pred_flag_alpha</b>	1	bslbf
<b>cbpa</b>	1-6	vlclbf
for(i=0;i<alpha_block_count;i++)		
if(!transparent_block())		
alpha_block(i)		
}		
} else { /* P or B macroblock */		

if(vop_coding_type == "P"    co_located_not_coded != 1) {		
<b>coda_pb</b>	1-2	vlclbf
if(coda_pb=="coded") {		
<b>cbpa</b>	1-6	vlclbf
for(i=0;i<alpha_block_count;i++)		
if(!transparent_block())		
alpha_block(i)		
}		
}		
}		
}		
}		
NOTE The value of block_count is 6 in the 4:2:0 format. The value of alpha_block_count is 4.		

#### 6.2.6.1 MB Binary Shape Coding

mb_binary_shape_coding() {	No. of bits	Mnemonic
<b>bab_type</b>	1-7	vlclbf
if ((vop_coding_type == 'P')    (vop_coding_type == 'B')) {		
if ((bab_type==1)    (bab_type == 6)) {		
<b>mvds_x</b>	1-18	vlclbf
<b>mvds_y</b>	1-18	vlclbf
}		
}		
if (bab_type >=4) {		
if (!change_conv_ratio_disable)		
<b>conv_ratio</b>	1-2	vlcbf
<b>scan_type</b>	1	bslbf
binary_arithmetic_code()		
}		
}		

backward_shape () {	No. of bits	Mnemonic
for(i=0; i<backward_shape_height/16; i++)		
for(j=0; j<backward_shape_width/16; j++) {		
<b>bab_type</b>	1-3	vlclbf

if (bab_type >=4) {		
if (!change_conv_ratio_disable)		
<b>conv_ratio</b>	1-2	vlcbf
<b>scan_type</b>	1	bslbf
binary_arithmetic_code()		
}		
}		
}		

forward_shape () {	No. of bits	Mnemonic
for(i=0; i<forward_shape_height/16; i++)		
for(j=0; j<forward_shape_width/16; j++) {		
<b>bab_type</b>	1-3	vlclbf
if (bab_type >=4) {		
if (!change_conv_ratio_disable)		
<b>conv_ratio</b>	1-2	vlcbf
<b>scan_type</b>	1	bslbf
binary_arithmetic_code()		
}		
}		
}		

### 6.2.6.2 Motion vector

motion_vector ( mode ) {	No. of bits	Mnemonic
if ( mode == „direct“ ) {		
<b>horizontal_mv_data</b>	1-13	vlclbf
<b>vertical_mv_data</b>	1-13	vlclbf
}		
else if ( mode == „forward“ ) {		
<b>horizontal_mv_data</b>	1-13	vlclbf
if ((vop_fcode_forward != 1)&&(horizontal_mv_data != 0))		
<b>horizontal_mv_residual</b>	1-6	uimsbf
<b>vertical_mv_data</b>	1-13	vlclbf
if ((vop_fcode_forward != 1)&&(vertical_mv_data != 0))		
<b>vertical_mv_residual</b>	1-6	uimsbf

}		
else if ( mode == „backward“ ) {		
<b>horizontal_mv_data</b>	1-13	vlclbf
if ((vop_fcode_backward != 1)&&(horizontal_mv_data != 0))		
<b>horizontal_mv_residual</b>	1-6	uimsbf
<b>vertical_mv_data</b>	1-13	vlclbf
if ((vop_fcode_backward != 1)&&(vertical_mv_data != 0))		
<b>vertical_mv_residual</b>	1-6	uimsbf
}		
}		

### 6.2.6.3 Interlaced Information

interlaced_information( ) {	No. of bits	Mnemonic
if ((derived_mb_type == 3)    (derived_mb_type == 4)    (cbp != 0) )		
<b>dct_type</b>	1	bslbf
if ( ((vop_coding_type == "P") && ((derived_mb_type == 0)    (derived_mb_type == 1)) )    ((vop_coding_type == "B") && (mb_type != "1")) ) {		
<b>field_prediction</b>	1	bslbf
if (field_prediction) {		
if (vop_coding_type == "P"    (vop_coding_type == "B" && mb_type != "001") ) {		
<b>forward_top_field_reference</b>	1	bslbf
<b>forward_bottom_field_reference</b>	1	bslbf
}		
if ((vop_coding_type == "B") && (mb_type != "0001") ) {		
<b>backward_top_field_reference</b>	1	bslbf
<b>backward_bottom_field_reference</b>	1	bslbf
}		
}		
}		
}		

### 6.2.7 Block

The detailed syntax for the term “DCT coefficient” is fully described in clause 7.

block( i ) {	No. of bits	Mnemonic
last = 0		
if(!data_partitioned && (derived_mb_type == 3    derived_mb_type == 4)) {		
if(short_video_header == 1)		
<b>intra_dc_coefficient</b>	8	uimsbf
else if (use_intra_dc_vlc == 1) {		
if ( i<4 ) {		
<b>dct_dc_size_luminance</b>	2-11	vlclbf
if(dct_dc_size_luminance != 0)		
<b>dct_dc_differential</b>	1-12	vlclbf
if (dct_dc_size_luminance > 8)		
<b>marker_bit</b>	1	bslbf
} else {		
<b>dct_dc_size_chrominance</b>	2-12	vlclbf
if(dct_dc_size_chrominance !=0)		
<b>dct_dc_differential</b>	1-12	vlclbf
if (dct_dc_size_chrominance > 8)		
<b>marker_bit</b>	1	bslbf
}		
}		
}		
if ( pattern_code[i] )		
while ( ! last )		
<b>DCT coefficient</b>	3-24	vlclbf
}		
NOTE “last” is defined to be the LAST flag resulting from reading the most recent DCT coefficient.		

#### 6.2.7.1 Alpha Block

The syntax for DCT coefficient decoding is the same as for block(i) in subclause 6.2.7.

alpha_block( i ) {	No. of bits	Mnemonic
last = 0		

if(!data_partitioned && (vop_coding_type == "I"    (vop_coding_type == "P" && !not_coded && (derived_mb_type == 3    derived_mb_type == 4)))) {		
<b>dct_dc_size_alpha</b>	2-11	vlclbf
if(dct_dc_size_alpha != 0)		
<b>dct_dc_differential</b>	1-12	vlclbf
if (dct_dc_size_alpha > 8)		
<b>marker_bit</b>	1	bslbf
}		
if ( pattern_code[i] )		
while ( ! last )		
<b>DCT coefficient</b>	3-24	vlclbf
}		

NOTE "last" is defined to be the LAST flag resulting from reading the most recent DCT coefficient.

### 6.2.8 Still Texture Object

StillTextureObject()	No. of bits	Mnemonic
<b>still_texture_object_start_code</b>	32	bslbf
<b>texture_object_id</b>	16	uimsbf
<b>marker_bit</b>	1	bslbf
<b>wavelet_filter_type</b>	1	uimsbf
<b>wavelet_download</b>	1	uimsbf
<b>wavelet_decomposition_levels</b>	4	uimsbf
<b>scan_direction</b>	1	bslbf
<b>start_code_enable</b>	1	bslbf
<b>texture_object_layer_shape</b>	2	uimsbf
<b>quantization_type</b>	2	uimsbf
if (quantization_type == 2) {		
<b>spatial_scalability_levels</b>	4	uimsbf
if (spatial_scalability_levels !=		
wavelet_decomposition_levels) {		
<b>use_default_spatial_scalability</b>	1	uimsbf
if (use_default_spatial_layer_size == 0)		
for (i=0; i<spatial_scalability_levels - 1; i++)		
<b>wavelet_layer_index</b>	4	

}		
if (wavelet_download == "1" ){		
<b>uniform_wavelet_filter</b>	1	uimsbf
if (uniform_wavelet_filter == "1")		
download_wavelet_filters()		
else		
for (i=0; i<wavelet_decomposition_levels; i++)		
download_wavelet_filters( )		
}		
<b>wavelet_stuffing</b>	3	uimsbf
if(texture_object_layer_shape == "00"){		
<b>texture_object_layer_width</b>	15	uimsbf
<b>marker_bit</b>	1	bslbf
<b>texture_object_layer_height</b>	15	uimsbf
<b>marker_bit</b>	1	bslbf
}		
else {		
<b>horizontal_ref</b>	15	imsbf
<b>marker_bit</b>	1	bslbf
<b>vertical_ref</b>	15	imsbf
<b>marker_bit</b>	1	bslbf
<b>object_width</b>	15	uimsbf
<b>marker_bit</b>	1	bslbf
<b>object_height</b>	15	uimsbf
<b>marker_bit</b>	1	bslbf
shape_object_decoding ( )		
}		
/* configuration information precedes this point; elementary stream data follows. See annex K */		
for (color = "y", "u", "v"){		
wavelet_dc_decode()		
}		
if(quantization_type == 1){		
TextureLayerSQ ( )		
}		
else if ( quantization_type == 2){		

if (start_code_enable == 1) {		
do {		
TextureSpatialLayerMQ ( )		
} while ( next_bits() == texture_spatial_layer_start_code )		
} else {		
for (i =0; i<spatial_scalability_levels; i++)		
TextureSpatialLayerMQNSC ( )		
}		
}		
else if ( quantization_type == 3){		
for (color = "y", "u", "v")		
do{		
<b>quant_byte</b>	8	uimsbf
} while( quant_byte >>7)		
<b>max_bitplanes</b>	5	uimsbf
if (scan_direction == 0) {		
do {		
TextureSNRLayerBQ ( )		
} while (next_bits() == texture_snr_layer_start_code)		
} else {		
do {		
TextureSpatialLayerBQ ( )		
} while ( next_bits() == texture_spatial_layer_start_code )		
}		
}		

#### 6.2.8.1 TextureLayerSQ

TextureLayerSQ()	No. of bits	Mnemonic
if (scan_direction == 0) {		
for ("y", "u", "v") {		
do {		
<b>quant_byte</b>	8	uimsbf
} while (quant_byte >> 7)		
for (i=0; i<wavelet_decomposition_levels; i++)		
if ( i!=0    color!="u","v" ) {		

<b>max_bitplane[i]</b>	5	uimsbf
if ((i+1)%4==0)		
<b>marker_bit</b>	1	bslbf
}		
}		
for (i = 0; i<tree_blocks; i++)		
for (color = "y", "u", "v")		
arith_decode_highbands_td()		
} else {		
if ( start_code_enable ) {		
do {		
TextureSpatialLayerSQ()		
} while ( next_bits() == texture_spatial_layer_start_code)		
} else {		
for (i = 0; i< wavelet_decomposition_levels; i++)		
TextureSpatialLayerSQNSC()		
}		
}		
}		

#### 6.2.8.2 TextureSpatialLayerSQ

TextureSpatialLayerSQ() {	No. of bits	Mnemonic
<b>texture_spatial_layer_start_code</b>	32	bslbf
<b>texture_spatial_layer_id</b>	5	uimsbf
TextureSpatialLayerSQNSC()		
}		

#### 6.2.8.3 TextureSpatialLayerSQNSC

TextureSpatialLayerSQNSC() {	No. of bits	Mnemonic
for (color="y","u","v") {		
if ( (first_wavelet_layer && color=="y")		
(second_wavelet_layer && color=="u","v") )		
do {		
<b>quant_byte</b>	8	uimsbf
} while (quant_byte >> 7)		

if (color == "y")		
<b>max_bitplanes</b>	5	uimbsf
else if (!first_wavelet_layer)		
<b>max_bitplanes</b>	5	uimbsf
}		
arith_decode_highbands_bb()		
}		

#### 6.2.8.4 TextureSpatialLayerMQ

TextureSpatialLayerMQ() {	No. of bits	Mnemonic
<b>texture_spatial_layer_start_code</b>	32	bslbf
<b>texture_spatial_layer_id</b>	5	uimsbf
<b>snr_scalability_levels</b>	5	uimsbf
do {		
TextureSNRLayerMQ()		
} while ( next_bits() == texture_snr_layer_start_code )		
}		

#### 6.2.8.5 TextureSpatialLayerMQNSC

TextureSpatialLayerMQNSC() {	No. of bits	Mnemonic
<b>snr_scalability_levels</b>	5	uimsbf
for (i =0; i<snr_scalability_levels;++)		
TextureSNRLayerMQNSC()		
}		

#### 6.2.8.6 TextureSNRLayerMQ

TextureSNRLayerMQ(){		
<b>texture_snr_layer_start_code</b>	32	bslbf
<b>texture_snr_layer_id</b>	5	uimsbf
TextureSNRLayerMQNSC()		
}		

## 6.2.8.7 TextureSNRLayerMQNSC

TextureSNRLayerMQNSC(){	No. of bits	Mnemonic
if (spatial_scalability_levels == wavelet_decomposition_levels && spatial_layer_id == 0) {		
for (color = "y" ) {		
do {		
<b>quant_byte</b>	8	uimsbf
} while (quant_byte >> 7)		
for (i=0; i<spatial_layers; i++) {		
<b>max_bitplane[i]</b>	5	uimsbf
if ((i+1)%4 == 0)		
<b>marker_bit</b>	1	bslbf
}		
}		
}		
else {		
for (color="y", "u", "v") {		
do {		
<b>quant_byte</b>	8	uimsbf
} while (quant_byte >> 7)		
for (i=0; i<spatial_layers; i++) {		
<b>max_bitplane[i]</b>	5	uimsbf
if ((i+1)%4 == 0)		
<b>marker_bit</b>	1	bslbf
}		
}		
}		
if (scan_direction == 0) {		
for (i = 0; i<tree_blocks; i++)		
for (color = "y", "u", "v")		
if (wavelet_decomposition_layer_id != 0    color != "u", "v" )		
arith_decode_highbands_td()		
} else {		
for (i = 0; i< spatial_layers; i++) {		
for (color = "y", "u", "v") {		

if (wavelet_decomposition_layer_id != 0    color != "u", "v" )		
arith_decode_highbands_bb()		
}		
}		
}		
}		

#### 6.2.8.8 TextureSpatialLayerBQ

TextureSpatialLayerBQ()	No. of bits	Mnemonic
<b>texture_spatial_layer_start_code</b>	32	bslbf
<b>texture_spatial_layer_id</b>	5	uimsbf
for ( i=0; i<max_bitplanes; i++ ) {		
<b>texture_snr_layer_start_code</b>	32	bslbf
<b>texture_snr_layer_id</b>	5	uimsbf
TextureBitPlaneBQ()		
next_start_code()		
}		
}		

#### 6.2.8.9 TextureBitPlaneBQ

TextureBitPlaneBQ ()	No. of bits	Mnemonic
for (color = "y", "u", "v")		
if (wavelet_decomposition_layer_id == 0 ){		
<b>all_nonzero[color]</b>	1	bslbf
if (all_nonzero[color] == 0) {		
<b>all_zero[color]</b>	1	bslbf
if (all_zero[color]==0) {		
<b>lh_zero[color]</b>	1	bslbf
<b>hl_zero[color]</b>	1	bslbf
<b>hh_zero[color]</b>	1	bslbf
}		
}		
}		
if (wavelet_decomposition_layer_id != 0   color != "u", "v" ){		
if(all_nonzero[color]==1    all_zero[color]==0){		

if (scan_direction == 0)		
arith_decode_highbands_bilevel_bb()		
else		
arith_decode_highbands_bilevel_td()		
}		
}		
}		
}		

#### 6.2.8.10 TextureSNRLayerBQ

TextureSNRLayerBQ()	No. of bits	Mnemonic
<b>texture_snr_layer_start_code</b>	32	bslbf
<b>texture_snr_layer_id</b>	5	uimsbf
for ( i=0; i<wavelet_decomposition_levels; i++ ) {		
<b>texture_spatial_layer_start_code</b>	32	bslbf
<b>texture_spatial_layer_id</b>	5	uimsbf
TextureBitPlaneBQ()		
next_start_code ()		
}		
}		

#### 6.2.8.11 DownloadWaveletFilters

download_wavelet_filters( ){	No. of bits	Mnemonic
<b>lowpass_filter_length</b>	4	uimsbf
<b>highpass_filter_length</b>	4	uimsbf
do{		
if ( wavelet_filter_type == 0 ) {		
<b>filter_tap_integer</b>	16	imsbf
<b>marker_bit</b>	1	bslbf
} else {		
<b>filter_tap_float_high</b>	16	uimsbf
<b>marker_bit</b>	1	bslbf
<b>filter_tap_float_low</b>	16	uimsbf
<b>marker_bit</b>	1	bslbf
}		

{ while (lowpass_filter_length--)		
do{		
if ( wavelet_filter_type == 0){		
filter_tap_integer	16	imsbf
marker_bit	1	bslbf
} else {		
filter_tap_float_high	16	uimsbf
marker_bit	1	bslbf
filter_tap_float_low	16	uimsbf
marker_bit	1	bslbf
}		
} while (highpass_filter_length--)		
if ( wavelet_filter_type == 0) {		
integer_scale	16	uimsbf
marker_bit		
}		
}		

#### 6.2.8.12 Wavelet dc decode

wavelet_dc_decode() {	No. of bits	Mnemonic
mean	8	uimsbf
do{		
quant_dc_byte	8	uimsbf
} while( quant_dc_byte >>7)		
do{		
band_offset_byte	8	uimsbf
} while (band_offset_byte >>7)		
do{		
band_max_byte	8	uimsbf
} while (band_max_byte >>7)		
arith_decode_dc()		
}		

## 6.2.8.13 Wavelet higher bands decode

wavelet_higher_bands_decode() {	No. of bits	Mnemonic
do{		
<b>root_max_alphabet_byte</b>	8	uimsbf
} while (root_max_alphabet_byte >>7)		
marker_bit	1	bslbf
do{		
<b>valz_max_alphabet_byte</b>	8	uimsbf
} while (valz_max_alphabet_byte >>7)		
do{		
<b>valnz_max_alphabet_byte</b>	8	uimsbf
} while (valnz_max_alphabet_byte >>7)		
arith_decode_highbands()		
}		

## 6.2.8.14 Shape Object Decoding

shape_object_decoding() {	No. of bits	Mnemonic
<b>change_conv_ratio_disable</b>	1	bslbf
<b>sto_constant_alpha</b>	1	bslbf
if (sto_constant_alpha)		
<b>sto_constant_alpha_value</b>	8	bslbf
for (i=0; i<((object_width+15)/16)*((object_height+15)/16); i++){		
<b>bab_type</b>	1-2	vlclbf
if (bab_type ==4) {		
if (!change_conv_ratio_disable)		
<b>conv_ratio</b>	1-2	vlcbf
<b>scan_type</b>	1	bslbf
binary_arithmetic_decode()		
}		
}		
}		

## 6.2.9 Mesh Object

MeshObject() {	No. of bits	Mnemonic
<b>mesh_object_start_code</b>	32	bslbf

do{		
MeshObjectPlane()		
} while (next_bits_bytealigned() == mesh_object_plane_start_code    next_bits_bytealigned() != '0000 0000 0000 0000 0000 0001')		
}		

### 6.2.9.1 Mesh Object Plane

MeshObjectPlane() {	No. of bits	Mnemonic
MeshObjectPlaneHeader()		
MeshObjectPlaneData()		
}		

MeshObjectPlaneHeader() {	No. of bits	Mnemonic
if (next_bits_bytealigned()=='0000 0000 0000 0000 0000 0001') {		
next_start_code()		
<b>mesh_object_plane_start_code</b>	32	bslbf
}		
<b>is_intra</b>	1	bslbf
<b>mesh_mask</b>	1	bslbf
temporal_header()		
}		

MeshObjectPlaneData() {	No. of bits	Mnemonic
if (mesh_mask == 1) {		
if (is_intra == 1)		
mesh_geometry()		
else		
mesh_motion()		
}		
}		

## 6.2.9.2 Mesh geometry

mesh_geometry()	No. of bits	Mnemonic
<b>mesh_type_code</b>	2	bslbf
if (mesh_type_code == '01') {		
<b>nr_of_mesh_nodes_hor</b>	10	uimsbf
<b>nr_of_mesh_nodes_vert</b>	10	uimsbf
<b>marker_bit</b>	1	uimsbf
<b>mesh_rect_size_hor</b>	8	uimsbf
<b>mesh_rect_size_vert</b>	8	uimsbf
<b>triangle_split_code</b>	2	bslbf
}		
else if (mesh_type_code == '10') {		
<b>nr_of_mesh_nodes</b>	16	uimsbf
<b>marker_bit</b>	1	uimsbf
<b>nr_of_boundary_nodes</b>	10	uimsbf
<b>marker_bit</b>	1	uimsbf
<b>node0_x</b>	13	simsbf
<b>marker_bit</b>	1	uimsbf
<b>node0_y</b>	13	simsbf
<b>marker_bit</b>	1	uimsbf
for (n=1; n < nr_of_mesh_nodes; n++) {		
<b>delta_x_len_vlc</b>	2-12	vlclbf
if (delta_x_len_vlc)		
<b>delta_x</b>	1-14	vlclbf
<b>delta_y_len_vlc</b>	2-12	vlclbf
if (delta_y_len_vlc)		
<b>delta_y</b>	1-14	vlclbf
}		
}		
}		

## 6.2.9.3 Mesh motion

mesh_motion()	No. of bits	Mnemonic
<b>motion_range_code</b>	3	bslbf
for (n=0; n < nr_of_mesh_nodes; n++) {		
<b>node_motion_vector_flag</b>	1	bslbf

if (node_motion_vector_flag == '0') {		
<b>delta_mv_x_vlc</b>	1-13	vlclbf
if ((motion_range_code != 1) && (delta_mv_x_vlc != 0))		
<b>delta_mv_x_res</b>	1-6	uimsbf
<b>delta_mv_y_vlc</b>	1-13	vlclbf
if ((motion_range_code != 1) && (delta_mv_y_vlc != 0))		
<b>delta_mv_y_res</b>	1-6	uimsbf
}		
}		
}		

### 6.2.10 Face Object

fba_object()	No. of bits	Mnemonic
<b>face_object_start_code</b>	32	bslbf
do {		
fba_object_plane()		
} while(!( (nextbits_bytealigned() == '000 0000 0000 0000 0000 0000') && ( nextbits_bytealigned() != face_object_plane_start_code)))		
}		

#### 6.2.10.1 Face Object Plane

fba_object_plane()	No. of bits	Mnemonic
<b>fba_object_plane_header()</b>		
<b>fba_object_plane_data()</b>		
}		

fba_object_plane_header()	No. of bits	Mnemonic
if (nextbits_bytealigned()=='000 0000 0000 0000 0000 0000') {		
<b>next_start_code()</b>		
<b>fba_object_plane_start_code</b>	32	bslbf
}		
<b>is_intra</b>	1	bslbf
<b>fba_object_mask</b>	2	bslbf

temporal_header()		
}		

fba_object_plane_data()	No. of bits	Mnemonic
if(fba_object_mask &'01') {		
if(is_intra) {		
<b>fap_quant</b>	5	uimsbf
for (group_number = 1; group_number <= 10; group_number++) {		
<b>marker_bit</b>	1	uimsbf
<b>fap_mask_type</b>	2	bslbf
if(fap_mask_type == '01'   fap_mask_type == '10')		
<b>fap_group_mask</b> [group_number]	2-16	vlcbf
}		
<b>fba_suggested_gender</b>	1	bslbf
<b>fba_object_coding_type</b>	1	bslbf
if(fba_object_coding_type == 0) {		
<b>is_i_new_max</b>	1	bslbf
<b>is_i_new_min</b>	1	bslbf
<b>is_p_new_max</b>	1	bslbf
<b>is_p_new_min</b>	1	bslbf
decode_new_minmax()		
decode_ifap()		
}		
if(fba_object_coding_type == 1)		
decode_i_segment()		
}		
else {		
if(fba_object_coding_type == 0)		
decode_pfap()		
if(fba_object_coding_type == 1)		
decode_p_segment()		
}		
}		

temporal_header()	No. of bits	Mnemonic
if (is_intra) {		

<b>is_frame_rate</b>	1	bslbf
if(is_frame_rate)		
decode_frame_rate()		
<b>is_time_code</b>	1	bslbf
if (is_time_code)		
<b>time_code</b>	18	bslbf
}		
<b>skip_frames</b>	1	bslbf
if(skip_frames)		
decode_skip_frames()		
}		

#### 6.2.10.2 Decode frame rate and skip frames

	<b>No. of bits</b>	<b>Mnemonic</b>
decode_frame_rate(){		
<b>frame_rate</b>	8	uimsbf
<b>seconds</b>	4	uimsbf
<b>frequency_offset</b>	1	uimsbf
}		

	<b>No. of bits</b>	<b>Mnemonic</b>
decode_skip_frames(){		
do{		
<b>number_of_frames_to_skip</b>	4	uimsbf
} while (number_of_frames_to_skip = "1111")		
}		

#### 6.2.10.3 Decode new minmax

	<b>No. of bits</b>	<b>Mnemonic</b>
decode_new_minmax() {		
if (is_i_new_max) {		
for (group_number = 2, j=0, group_number <= 10, group_number++)		
for (i=0; i < NFAP[group_number]; i++, j++) {		
if (!(i & 0x3))		
<b>marker_bit</b>	1	uimsbf
if (fap_group_mask[group_number] & (1 <<i))		
<b>i_new_max[j]</b>	5	uimsbf
}		

if (is_i_new_min) {		
for (group_number = 2, j=0, group_number <= 10, group_number++)		
for (i=0; i < NFAP[group_number]; i++, j++) {		
if (!(i & 0x3))		
<b>marker_bit</b>	1	uimsbf
if (fap_group_mask[group_number] & (1 <<i))		
<b>i_new_min[j]</b>	5	uimsbf
}		
if (is_p_new_max) {		
for (group_number = 2, j=0, group_number <= 10, group_number++)		
for (i=0; i < NFAP[group_number]; i++, j++) {		
if (!(i & 0x3))		
<b>marker_bit</b>	1	uimsbf
if (fap_group_mask[group_number] & (1 <<i))		
<b>p_new_max[j]</b>	5	uimsbf
}		
if (is_p_new_min) {		
for (group_number = 2, j=0, group_number <= 10, group_number++)		
for (i=0; i < NFAP[group_number]; i++, j++) {		
if (!(i & 0x3))		
<b>marker_bit</b>	1	uimsbf
if (fap_group_mask[group_number] & (1 <<i))		
<b>p_new_min[j]</b>	5	uimsbf
}		
}		
}		

#### 6.2.10.4 Decode\_ifap

decode_ifap()	No. of bits	Mnemonic
for (group_number = 1, j=0; group_number <= 10; group_number++) {		
if (group_number == 1) {		
if(fap_group_mask[1] & 0x1)		
decode_viseme()		
if(fap_group_mask[1] & 0x2)		
decode_expression()		
} else {		

for (i= 0; i<NFAP[group_number]; i++, j++) {		
if(fap_group_mask[group_number] & (1 << i)) {		
aa_decode(ifap_Q[j],ifap_cum_freq[j])		
}		
}		
}		
}		

#### 6.2.10.5 Decode pfap

decode_pfap(){	No. of bits	Mnemonic
for (group_number = 1, j=0; group_number <= 10; group_number++) {		
if (group_number == 1) {		
if(fap_group_mask[1] & 0x1)		
decode_viseme()		
if(fap_group_mask[1] & 0x2)		
decode_expression()		
} else {		
for (i= 0; i<NFAP[group_number]; i++, j++) {		
if(fap_group_mask[group_number] & (1 << i)) {		
aa_decode(pfap_diff[i],pfap_cum_freq[j])		
}		
}		
}		
}		
}		

#### 6.2.10.6 Decode viseme and expression

decode_viseme() {	No. of bits	Mnemonic
aa_decode(viseme_select1Q, viseme_select1_cum_freq)		vlclbf
aa_decode(viseme_select2Q, viseme_select2_cum_freq)		vlclbf
aa_decode(viseme_blendQ, viseme_blend_cum_freq)		vlclbf
viseme_def	1	bslbf
}		

	No. of bits	Mnemonic
decode_expression() {		
aa_decode(expression_select1Q, expression_select1_cum_freq)		vlclbf
aa_decode(expression_intensity1Q, expression_intensity1_cum_freq)		vlclbf
aa_decode(expression_select2Q, expression_select2_cum_freq)		vlclbf
aa_decode(expression_intensity2Q, expression_intensity2_cum_freq)		vlclbf
aa_decode(expression_blendQ, expression_blend_cum_freq)		vlclbf
<b>init_face</b>	1	bslbf
<b>expression_def</b>	1	bslbf
}		

#### 6.2.10.7 Face Object Plane Group

	No. of bits	Mnemonic
face_object_plane_group() {		
<b>face_object_plane_start_code</b>	32	bslbf
<b>is_intra</b>	1	bslbf
<b>if (is_intra) {</b>		
<b>face_paramset_mask</b>	2	bslbf
<b>is_frame_rate</b>	1	bslbf
<b>if(is_frame_rate)</b>		
decode_frame_rate()		
<b>is_time_code</b>	1	bslbf
<b>if(is_time_code)</b>		
<b>time_code</b>	18	
<b>skip_frames</b>	1	bslbf
<b>if(skip_frames)</b>		
decode_skip_frames()		
<b>if(face_paramset_mask == '01')</b> {		
<b>fap_quant_index</b>	5	uimsbf
<b>for (group_number = 1 to 10) {</b>		
<b>marker_bit</b>	1	uimsbf
<b>fap_mask_type</b>	2	bslbf
<b>if(fap_mask_type == '01'   fap_mask_type == '10')</b>		
<b>fap_group_mask[group_number]</b>	2-16	vlcbf
<b>}</b>		
decode_i_segment()		

{ else {		
face_object_group_prediction()		
}		
next_start_code()		
}		

#### 6.2.10.8 Face Object Group Prediction

face_object_group_prediction() {	No. of bits	Mnemonic
<b>skip_frames</b>	1	bslbf
if(skip_frames)		
decode_skip_frames()		
if(face_paramset_mask == '01') {		
decode_p_segment()		
}		
}		

#### 6.2.10.9 Decode i\_segment

decode_i_segment() {	No. of bits	Mnemonic
for (group_number= 1, j=0; group_number<= 10; group_number++) {		
if (group_number == 1) {		
if(fap_group_mask[1] & 0x1)		
decode_i_viseme_segment()		
if(fap_group_mask[1] & 0x2)		
decode_i_expression_segment()		
} else {		
for(i=0; i<NFAP[group_number]; i++, j++) {		
if(fap_group_mask[group_number] & (1 << i)) {		
decode_i_dc(dc_Q[j])		
decode_ac(ac_Q[j])		
}		
}		
}		
}		

## 6.2.10.10 Decode p\_segment

decode_p_segment(){	No. of bits	Mnemonic
for (group_number = 1, j=0; group_number <= 10; group_number++) {		
if (group_number == 1) {		
if(fap_group_mask[1] & 0x1)		
decode_p_viseme_segment()		
if(fap_group_mask[1] & 0x2)		
decode_p_expression_segment()		
} else {		
for (i=0; i<NFAP[group_number]; i++, j++) {		
if(fap_group_mask[group_number] & (1 << i)) {		
decode_p_dc(dc_Q[j])		
decode_ac(ac_Q[j])		
}		
}		
}		
}		

## 6.2.10.11 Decode viseme and expression

decode_i_viseme_segment(){	No. of bits	Mnemonic
<b>viseme_segment_select1q[0]</b>	4	uimsbf
<b>viseme_segment_select2q[0]</b>	4	uimsbf
<b>viseme_segment_blendq[0]</b>	6	uimsbf
<b>viseme_segment_def[0]</b>	1	bslbf
for (k=1; k<16, k++) {		
<b>viseme_segment_select1q_diff[k]</b>		vlclbf
<b>viseme_segment_select2q_diff[k]</b>		vlclbf
<b>viseme_segment_blendq_diff[k]</b>		vlclbf
<b>viseme_segment_def[k]</b>	1	bslbf
}		
}		

decode_p_viseme_segment(){	No. of bits	Mnemonic
for (k=0; k<16, k++) {		

<b>viseme_segment_select1q_diff[k]</b>		vlclbf
<b>viseme_segment_select2q_diff[k]</b>		vlclbf
<b>viseme_segment_blendq_diff[k]</b>		vlclbf
<b>viseme_segment_def[k]</b>	1	bslbf
}		
}		

<b>decode_i_expression_segment()</b>	<b>No. of bits</b>	<b>Mnemonic</b>
<b>expression_segment_select1q[0]</b>	4	uimsbf
<b>expression_segment_select2q[0]</b>	4	uimsbf
<b>expression_segment_intensity1q[0]</b>	6	uimsbf
<b>expression_segment_intensity2q[0]</b>	6	uimsbf
<b>expression_segment_init_face[0]</b>	1	bslbf
<b>expression_segment_def[0]</b>	1	bslbf
for (k=1; k<16, k++) {		
<b>expression_segment_select1q_diff[k]</b>		vlclbf
<b>expression_segment_select2q_diff[k]</b>		vlclbf
<b>expression_segment_intensity1q_diff[k]</b>		vlclbf
<b>expression_segment_intensity2q_diff[k]</b>		vlclbf
<b>expression_segment_init_face[k]</b>	1	bslbf
<b>expression_segment_def[k]</b>	1	bslbf
}		
}		

<b>decode_p_expression_segment()</b>	<b>No. of bits</b>	<b>Mnemonic</b>
for (k=0; k<16, k++) {		
<b>expression_segment_select1q_diff[k]</b>		vlclbf
<b>expression_segment_select2q_diff[k]</b>		vlclbf
<b>expression_segment_intensity1q_diff[k]</b>		vlclbf
<b>expression_segment_intensity2q_diff[k]</b>		vlclbf
<b>expression_segment_init_face[k]</b>	1	bslbf
<b>expression_segment_def[k]</b>	1	bslbf
}		
}		

decode_i_dc(dc_q) {	No. of bits	Mnemonic
<b>dc_q</b>	16	simsbf
if(dc_q == -256*128)		
<b>dc_q</b>	31	simsbf
}		

decode_p_dc(dc_q_diff) {	No. of bits	Mnemonic
<b>dc_q_diff</b>		vlclbf
dc_q_diff = dc_q_diff - 256		
if(dc_q_diff == -256)		
<b>dc_q_diff</b>	16	simsbf
if(dc_Q == 0-256*128)		
<b>dc_q_diff</b>	32	simsbf
}		

decode_ac(ac_Q[i]) {	No. of bits	Mnemonic
this = 0		
next = 0		
while(next < 15) {		
<b>count_of_runs</b>		vlclbf
if (count_of_runs == 15)		
next = 16		
else {		
next = this+1+count_of_runs		
for (n=this+1; n<next; n++)		
ac_q[i][n] = 0		
<b>ac_q[i][next]</b>		vlclbf
if( ac_q[i][next] == 256)		
decode_i_dc(ac_q[i][next])		
else		
ac_q[i][next] = ac_q[i][next]-256		
this = next		
}		
}		
}		

## 6.3 Visual bitstream semantics

### 6.3.1 Semantic rules for higher syntactic structures

This subclause details the rules that govern the way in which the higher level syntactic elements may be combined together to produce a legal bitstream. Subsequent subclauses detail the semantic meaning of all fields in the video bitstream.

### 6.3.2 Visual Object Sequence and Visual Object

**visual\_object\_sequence\_start\_code:** The visual\_object\_sequence\_start\_code is the bit string '000001B0' in hexadecimal. It initiates a visual session.

**profile\_and\_level\_indication:** This is an 8-bit integer used to signal the profile and level identification. The meaning of the bits is given in Table G-1.

**visual\_object\_sequence\_end\_code:** The visual\_object\_sequence\_end\_code is the bit string '000001B1' in hexadecimal. It terminates a visual session.

**visual\_object\_start\_code:** The visual\_object\_start\_code is the bit string '000001B5' in hexadecimal. It initiates a visual object.

**is\_visual\_object\_identifier:** This is a 1-bit code which when set to '1' indicates that version identification and priority is specified for the visual object. When set to '0', no version identification or priority needs to be specified.

**visual\_object\_verid:** This is a 4-bit code which identifies the version number of the visual object. Its meaning is defined in Table 6-4.

Table 6-4 -- Meaning of visual\_object\_verid

visual_object_verid	Meaning
0000	reserved
0001	ISO/IEC 14496-2
0010 - 1111	reserved

**visual\_object\_priority:** This is a 3-bit code which specifies the priority of the visual object. It takes values between 1 and 7, with 1 representing the highest priority and 7, the lowest priority. The value of zero is reserved.

**visual\_object\_type:** The visual\_object\_type is a 4-bit code given in Table 6-5 which identifies the type of the visual object.

Table 6-5 -- Meaning of visual object type

code	visual object type
0000	reserved
0001	video ID
0010	still texture ID
0011	mesh ID
0100	face ID
0101	reserved
:	:

:	:
1111	reserved

**video\_object\_start\_code:** The video\_object\_start\_code is a string of 32 bits. The first 27 bits are '0000 0000 0000 0000 0000 0001 000' in binary and the last 5-bits represent one of the values in the range of '00000' to '11111' in binary. The video\_object\_start\_code marks a new video object.

**video\_object\_id:** This is given by the last 5-bits of the video\_object\_start\_code. The video\_object\_id uniquely identifies a video object.

**video\_signal\_type:** A flag which if set to '1' indicates the presence of video\_signal\_type information.

**video\_format:** This is a three bit integer indicating the representation of the pictures before being coded in accordance with this part of ISO/IEC 14496. Its meaning is defined in Table 6-6. If the video\_signal\_type() is not present in the bitstream then the video format may be assumed to be "Unspecified video format".

**Table 6-6 -- Meaning of video\_format**

video_format	Meaning
000	Component
001	PAL
010	NTSC
011	SECAM
100	MAC
101	Unspecified video format
110	Reserved
111	Reserved

**video\_range:** This one-bit flag indicates the black level and range of the luminance and chrominance signals.

**colour\_description:** A flag which if set to '1' indicates the presence of colour\_primaries, transfer\_characteristics and matrix\_coefficients in the bitstream.

**colour\_primaries:** This 8-bit integer describes the chromaticity coordinates of the source primaries, and is defined in Table 6-7.

**Table 6-7 -- Colour Primaries**

Value	Primaries
0	(forbidden)
1	Recommendation ITU-R BT.709 primary x y green 0,300 0,600 blue 0,150 0,060 red 0,640 0,330 white D65 0,3127 0,3290

2	Unspecified Video Image characteristics are unknown.
3	Reserved
4	Recommendation ITU-R BT.470-2 System M primary x y green 0,21 0,71 blue 0,14 0,08 red 0,67 0,33 white C 0,310 0,316
5	Recommendation ITU-R BT.470-2 System B, G primary x y green 0,29 0,60 blue 0,15 0,06 red 0,64 0,33 white D65 0,3127 0,3290
6	SMPTE 170M primary x y green 0,310 0,595 blue 0,155 0,070 red 0,630 0,340 white D65 0,3127 0,3290
7	SMPTE 240M (1987) primary x y green 0,310 0,595 blue 0,155 0,070 red 0,630 0,340 white D65 0,3127 0,3290
8	Generic film (colour filters using Illuminant C) primary x y green 0,243 0,692 (Wratten 58) blue 0,145 0,049 (Wratten 47) red 0,681 0,319 (Wratten 25)
9-255	Reserved

In the case that `video_signal_type()` is not present in the bitstream or `colour_description` is zero the chromaticity is assumed to be that corresponding to `colour_primaries` having the value 1.

**transfer\_characteristics:** This 8-bit integer describes the opto-electronic transfer characteristic of the source picture, and is defined in Table 6-8.

Table 6-8 -- Transfer Characteristics

Value	Transfer Characteristic
0	(forbidden)
1	<p>Recommendation ITU-R BT.709</p> $V = 1,099 L_C^{0,45} - 0,099$ <p>for <math>1 \geq L_C \geq 0,018</math></p> $V = 4,500 L_C$ <p>for <math>0,018 &gt; L_C \geq 0</math></p>
2	<p>Unspecified Video</p> <p>Image characteristics are unknown.</p>
3	reserved
4	<p>Recommendation ITU-R BT.470-2 System M</p> <p>Assumed display gamma 2,2</p>
5	<p>Recommendation ITU-R BT.470-2 System B, G</p> <p>Assumed display gamma 2,8</p>
6	<p>SMPTE 170M</p> $V = 1,099 L_C^{0,45} - 0,099$ <p>for <math>1 \geq L_C \geq 0,018</math></p> $V = 4,500 L_C$ <p>for <math>0,018 &gt; L_C \geq 0</math></p>
7	<p>SMPTE 240M (1987)</p> $V = 1,1115 L_C^{0,45} - 0,1115$ <p>for <math>L_C \geq 0,0228</math></p> $V = 4,0 L_C$ <p>for <math>0,0228 &gt; L_C</math></p>
8	<p>Linear transfer characteristics</p> <p>i.e. <math>V = L_C</math></p>
9	<p>Logarithmic transfer characteristic (100:1 range)</p> $V = 1.0 - \log_{10}(L_C)/2$ <p>for <math>1 = L_C = 0.01</math></p> $V = 0.0$ <p>for <math>0.01 &gt; L_C</math></p>

10	Logarithmic transfer characteristic (316.22777:1 range) $V = 1.0 - \text{Log}_{10}(L_c)/2.5$ for $1 = L_c = 0.0031622777$ $V = 0.0$ for $0.0031622777 > L_c$
11-255	reserved

In the case that `video_signal_type()` is not present in the bitstream or `colour_description` is zero the transfer characteristics are assumed to be those corresponding to `transfer_characteristics` having the value 1.

**matrix\_coefficients:** This 8-bit integer describes the matrix coefficients used in deriving luminance and chrominance signals from the green, blue, and red primaries, and is defined in Table 6-9.

In this table:

$E'Y$  is analogue with values between 0 and 1

$E'PB$  and  $E'PR$  are analogue between the values -0,5 and 0,5

$E'R$ ,  $E'G$  and  $E'B$  are analogue with values between 0 and 1

White is defined as  $E'Y=1$ ,  $E'PB=0$ ,  $E'PR=0$ ;  $E'R=E'G=E'B=1$ .

$Y$ ,  $Cb$  and  $Cr$  are related to  $E'Y$ ,  $E'PB$  and  $E'PR$  by the following formulae:

if `video_range=0`:

$$Y = (219 * 2^{n-8} * E'Y) + 2^{n-4}$$

$$Cb = (224 * 2^{n-8} * E'PB) + 2^{n-1}$$

$$Cr = (224 * 2^{n-8} * E'PR) + 2^{n-1}$$

if `video_range=1`:

$$Y = ((2^n - 1) * E'Y)$$

$$Cb = ((2^n - 1) * E'PB) + 2^{n-1}$$

$$Cr = ((2^n - 1) * E'PR) + 2^{n-1}$$

for n bit video.

For example, for 8 bit video,

`video_range=0` gives a range of  $Y$  from 16 to 235,  $Cb$  and  $Cr$  from 16 to 240;

`video_range=1` gives a range of  $Y$  from 0 to 255,  $Cb$  and  $Cr$  from 0 to 255.

**Table 6-9 -- Matrix Coefficients**

Value	Matrix
0	(forbidden)

1	Recommendation ITU-R BT.709 $E'Y = 0,7152 E'_G + 0,0722 E'_B + 0,2126 E'_R$ $E'PB = -0,386 E'_G + 0,500 E'_B - 0,115 E'_R$ $E'PR = -0,454 E'_G - 0,046 E'_B + 0,500 E'_R$
2	Unspecified Video  Image characteristics are unknown.
3	reserved
4	FCC  $E'Y = 0,59 E'_G + 0,11 E'_B + 0,30 E'_R$ $E'PB = -0,331 E'_G + 0,500 E'_B - 0,169 E'_R$ $E'PR = -0,421 E'_G - 0,079 E'_B + 0,500 E'_R$
5	Recommendation ITU-R BT.470-2 System B, G  $E'Y = 0,587 E'_G + 0,114 E'_B + 0,299 E'_R$ $E'PB = -0,331 E'_G + 0,500 E'_B - 0,169 E'_R$ $E'PR = -0,419 E'_G - 0,081 E'_B + 0,500 E'_R$
6	SMPTE 170M  $E'Y = 0,587 E'_G + 0,114 E'_B + 0,299 E'_R$ $E'PB = -0,331 E'_G + 0,500 E'_B - 0,169 E'_R$ $E'PR = -0,419 E'_G - 0,081 E'_B + 0,500 E'_R$
7	SMPTE 240M (1987)  $E'Y = 0,701 E'_G + 0,087 E'_B + 0,212 E'_R$ $E'PB = -0,384 E'_G + 0,500 E'_B - 0,116 E'_R$ $E'PR = -0,445 E'_G - 0,055 E'_B + 0,500 E'_R$
8-255	reserved

In the case that `video_signal_type()` is not present in the bitstream or `colour_description` is zero the matrix coefficients are assumed to be those corresponding to `matrix_coefficients` having the value 1.

In the case that `video_signal_type()` is not present in the bitstream, `video_range` is assumed to have the value 0 (a range of Y from 16 to 235 for 8-bit video).

### 6.3.2.1 User data

**user\_data\_start\_code:** The `user_data_start_code` is the bit string ‘000001B2’ in hexadecimal. It identifies the beginning of user data. The user data continues until receipt of another start code.

**user\_data:** This is an 8 bit integer, an arbitrary number of which may follow one another. User data is defined by users for their specific applications. In the series of consecutive `user_data` bytes there shall not be a string of 23 or more consecutive zero bits.

### 6.3.3 Video Object Layer

**video\_object\_layer\_start\_code:** The video\_object\_layer\_start\_code is a string of 32 bits. The first 28 bits are '0000 0000 0000 0000 0001 0010' in binary and the last 4-bits represent one of the values in the range of '0000' to '1111' in binary. The video\_object\_layer\_start\_code marks a new video object layer.

**video\_object\_layer\_id:** This is given by the last 4-bits of the video\_object\_layer\_start\_code. The video\_object\_layer\_id uniquely identifies a video object layer.

**short\_video\_header:** The short\_video\_header is an internal flag which is set to 1 when an abbreviated header format is used for video content. This indicates video data which begins with a short\_video\_start\_marker rather than a longer start code such as visual\_object\_start\_code. The short header format is included herein to provide forward compatibility with video codecs designed using the earlier video coding specification ITU-T Recommendation H.263. All decoders which support video objects shall support both header formats (short\_video\_header equal to 0 or 1) for the subset of video tools that is expressible in either form.

**video\_plane\_with\_short\_header():** This is a syntax layer encapsulating a video plane which has only the limited set of capabilities available using the short header format.

**random\_accessible\_vol:** This flag may be set to "1" to indicate that every VOP in this VOL is individually decodable. If all of the VOPs in this VOL are intra-coded VOPs and some more conditions are satisfied then random\_accessible\_vol may be set to "1". The flag random\_accessible\_vol is not used by the decoding process. random\_accessible\_vol is intended to aid random access or editing capability. This shall be set to "0" if any of the VOPs in the VOL are non-intra coded or certain other conditions are not fulfilled.

**video\_object\_type\_indication:** Constrains the following bitstream to use tools from the indicated object type only, e.g. Simple Object or Core Object, as shown in Table 6-10.

Table 6-10 -- FLC table for video\_object\_type indication

Video Object Type	Code
Reserved	00000000
Simple Object Type	00000001
Simple Scalable Object Type	00000010
Core Object Type	00000011
Main Object Type	00000100
N-bit Object Type	00000101
Basic Anim. 2D Texture	00000110
Anim. 2D Mesh	00000111
Simple Face	00001000
Still Scalable Texture	00001001
Reserved	00001010 - 11111111

**is\_object\_layer\_identifier:** This is a 1-bit code which when set to '1' indicates that version identification and priority is specified for the visual object layer. When set to '0', no version identification or priority needs to be specified.

**video\_object\_layer\_verid:** This is a 4-bit code which identifies the version number of the video object layer. Its meaning is defined in Table 6-11. If both visual\_object\_verid and video\_object\_layer\_verid exist, the semantics of video\_object\_layer\_verid supersedes the other.

**Table 6-11 -- Meaning of video\_object\_layer\_verid**

video_object_layer_verid	Meaning
0000	reserved
0001	ISO/IEC 14496-2
0010 - 1111	reserved

**video\_object\_layer\_priority:** This is a 3-bit code which specifies the priority of the video object layer. It takes values between 1 and 7, with 1 representing the highest priority and 7, the lowest priority. The value of zero is reserved.

**aspect\_ratio\_info:** This is a four-bit integer which defines the value of pixel aspect ratio. Table 6-12 shows the meaning of the code. If aspect\_ratio\_info indicates extended PAR, pixel\_aspect\_ratio is represented by par\_width and par\_height. The par\_width and par\_height shall be relatively prime.

**Table 6-12 -- Meaning of pixel aspect ratio**

aspect_ratio_info	pixel aspect ratios
0000	Forbidden
0001	1:1 (Square)
0010	12:11 (625-type for 4:3 picture)
0011	10:11 (525-type for 4:3 picture)
0100	16:11 (625-type stretched for 16:9 picture)
0101	40:33 (525-type stretched for 16:9 picture)
0110-1110	Reserved
1111	extended PAR

**par\_width:** This is an 8-bit unsigned integer which indicates the horizontal size of pixel aspect ratio. A zero value is forbidden.

**par\_height:** This is an 8-bit unsigned integer which indicates the vertical size of pixel aspect ratio. A zero value is forbidden.

**vol\_control\_parameters:** This a one-bit flag which when set to '1' indicates presence of the following parameters: chroma\_format, low\_delay, and vbv\_parameters.

**chroma\_format:** This is a two bit integer indicating the chrominance format as defined in the Table 6-13.

**Table 6-13 -- Meaning of chroma\_format**

chroma_format	Meaning
00	reserved
01	4:2:0
10	reserved
11	reserved

**low\_delay** : This is a one-bit flag which when set to '1' indicates the VOL contains no B-VOPs.

**vbv\_parameters**: This is a one-bit flag which when set to '1' indicates presence of following VBV parameters: first\_half\_bit\_rate, latter\_half\_bit\_rate, first\_half\_vbv\_buffer\_size, latter\_half\_vbv\_buffer\_size, first\_half\_vbv\_occupancy and latter\_half\_vbv\_occupancy. The VBV constraint is defined in annex D.

**first\_half\_bit\_rate, latter\_half\_bit\_rate**: The bit rate is a 30-bit unsigned integer which specifies the bitrate of the bitstream measured in units of 400 bits/second, rounded upwards. The value zero is forbidden. This value is divided to two parts. The most significant bits are in first\_half\_bit\_rate (15 bits) and the least significant bits are in latter\_half\_bit\_rate (15 bits). The marker\_bit is inserted between the first\_half\_bit\_rate and the latter\_half\_bit\_rate in order to avoid the resync\_marker emulation. The instantaneous video object layer channel bit rate seen by the encoder is denoted by  $R_{vol}(t)$  in bits per second. If the bit\_rate (i.e. first\_half\_bit\_rate and latter\_half\_bit\_rate) field in the VOL header is present, it defines a peak rate (in units of 400 bits per second; a value of 0 is forbidden) such that  $R_{vol}(t) \leq 400 \times bit\_rate$ . Note that  $R_{vol}(t)$  counts only visual syntax for the current elementary stream (also see annex D).

**first\_half\_vbv\_buffer\_size, latter\_half\_vbv\_buffer\_size**: vbv\_buffer\_size is an 18-bit unsigned integer. This value is divided into two parts. The most significant bits are in first\_half\_vbv\_buffer\_size (15 bits) and the least significant bits are in latter\_half\_vbv\_buffer\_size (3 bits). The VBV buffer size is specified in units of 16384 bits. The value 0 for vbv\_buffer\_size is forbidden. Define  $B = 16384 \times vbv\_buffer\_size$  to be the VBV buffer size in bits.

**first\_half\_vbv\_occupancy, latter\_half\_vbv\_occupancy**: The vbv\_occupancy is a 26-bit unsigned integer. This value is divided to two parts. The most significant bits are in first\_half\_vbv\_occupancy (11 bits) and the least significant bits are in latter\_half\_vbv\_occupancy (15 bits). The marker\_bit is inserted between the first\_vbv\_buffer\_size and the latter\_half\_vbv\_buffer\_size in order to avoid the resync\_marker emulation. The value of this integer is the VBV occupancy in 64-bit units just before the removal of the first VOP following the VOL header. The purpose for the quantity is to provide the initial condition for VBV buffer fullness.

**video\_object\_layer\_shape**: This is a 2-bit integer defined in Table 6-14. It identifies the shape type of a video object layer.

Table 6-14 -- Video Object Layer shape type

Shape format	Meaning
00	rectangular
01	binary
10	binary only
11	grayscale

**vop\_time\_increment\_resolution**: This is a 16-bit unsigned integer that indicates the number of evenly spaced subintervals, called ticks, within one modulo time. One modulo time represents the fixed interval of one second. The value zero is forbidden.

**fixed\_vop\_rate**: This is a one-bit flag which indicates that all VOPs are coded with a fixed VOP rate. It shall only be '1' if and only if all the distances between the display time of any two successive VOPs in the display order in the video object layer are constant. In this case, the VOP rate can be derived from the fixed\_VOP\_time\_increment. If it is '0' the display time between any two successive VOPs in the display order can be variable thus indicated by the time stamps provided in the VOP header.

**fixed\_vop\_time\_increment**: This value represents the number of ticks between two successive VOPs in the display order. The length of a tick is given by VOP\_time\_increment\_resolution. It can take a value in the range of  $[0, VOP\_time\_increment\_resolution]$ . The number of bits representing the value is calculated as the minimum number of unsigned integer bits required to represent the above range. fixed\_VOP\_time\_increment shall only be present if fixed\_VOP\_rate is '1' and its value must be identical to the constant given by the distance between the display time of any two successive VOPs in the display order. In this case, the fixed VOP rate is given as  $(VOP\_time\_increment\_resolution / fixed\_VOP\_time\_increment)$ . A zero value is forbidden.

## EXAMPLE

$$\begin{aligned} \text{VOP time} &= \text{tick} \times \text{vop\_time\_increment} \\ &= \text{vop\_time\_increment} / \text{vop\_time\_increment\_resolution} \end{aligned}$$

**Table 6-15 -- Examples of vop\_time\_increment\_resolution, fix\_vop\_time\_increment, and vop\_time\_increment**

Fixed VOP rate = 1/VOP time	vop_time_increment_resolution	fixed_vop_time_increment	vop_time_increment
15Hz	15	1	0, 1, 2, 3, 4,...
7.5Hz	15	2	0, 2, 4, 6, 8,...
29.97...Hz	30000	1001	0, 1001, 2002, 3003,...
59.94...Hz	60000	1001	0, 1001, 2002, 3003,...

**video\_object\_layer\_width:** The video\_object\_layer\_width is a 13-bit unsigned integer representing the width of the displayable part of the luminance component in pixel units. The width of the encoded luminance component of VOPs in macroblocks is  $(\text{video_object_layer_width}+15)/16$ . The displayable part is left-aligned in the encoded VOPs.

**video\_object\_layer\_height:** The video\_object\_layer\_height is a 13-bit unsigned integer representing the height of the displayable part of the luminance component in pixel units. The height of the encoded luminance component of VOPs in macroblocks is  $(\text{video_object_layer_height}+15)/16$ . The displayable part is top-aligned in the encoded VOPs.

**interlaced:** This is a 1 bit flag which, when set to "1" indicates that the VOP may contain interlaced video. When this flag is set to "0", the VOP is of non-interlaced (or progressive) format.

**obmc\_disable:** This is a one-bit flag which when set to '1' disables overlapped block motion compensation.

**sprite\_enable:** This is a one-bit flag which when set to '1' indicates the presence of sprites.

**sprite\_width:** This is a 13-bit unsigned integer which identifies the horizontal dimension of the sprite.

**sprite\_height:** This is a 13-bit unsigned integer which identifies the vertical dimension of the sprite.

**sprite\_left\_coordinate** – This is a 13-bit signed integer which defines the left-edge of the sprite. The value of sprite\_left\_coordinate shall be divisible by two.

**sprite\_top\_coordinate:** This is a 13-bit signed integer which defines the top edge of the sprite. The value of sprite\_left\_coordinate shall be divisible by two.

**no\_of\_sprite\_warping\_points:** This is a 6-bit unsigned integer which represents the number of points used in sprite warping. When its value is 0 and when sprite\_enable is set to '1', warping is identity (stationary sprite) and no coordinates need to be coded. When its value is 4, a perspective transform is used. When its value is 1,2 or 3, an affine transform is used. Further, the case of value 1 is separated as a special case from that of values 2 or 3. Table 6-16 shows the various choices.

**Table 6-16 -- Number of point and implied warping function**

Number of points	warping function
0	Stationary
1	Translation
2,3	Affine
4	Perspective

**sprite\_warping\_accuracy** – This is a 2-bit code which indicates the quantization accuracy of motion vectors used in the warping process for sprites. Table 6-17 shows the meaning of various codewords

**Table 6-17 -- Meaning of sprite warping accuracy codewords**

code	sprite_warping_accuracy
00	½ pixel
01	¼ pixel
10	1/8 pixel
11	1/16 pixel

**sprite\_brightness\_change**: This is a one-bit flag which when set to '1' indicates a change in brightness during sprite warping, alternatively, a value of '0' means no change in brightness.

**low\_latency\_sprite\_enable**: This is a one-bit flag which when set to "1" indicates the presence of low\_latency sprite, alternatively, a value of "0" means basic sprite.

**not\_8\_bit**: This one bit flag is set when the video data precision is not 8 bits per pixel.

**quant\_precision**: This field specifies the number of bits used to represent quantiser parameters. Values between 3 and 9 are allowed. When not\_8\_bit is zero, and therefore quant\_precision is not transmitted, it takes a default value of 5.

**bits\_per\_pixel**: This field specifies the video data precision in bits per pixel. It may take different values for different video object layers within a single video object. A value of 12 in this field would indicate 12 bits per pixel. This field may take values between 4 and 12. When not\_8\_bit is zero and bits\_per\_pixel is not present, the video data precision is always 8 bits per pixel, which is equivalent to specifying a value of 8 in this field. The same number of bits per pixel is used in the luminance and two chrominance planes. The alpha plane, used to specify shape of video objects, is always represented with 8 bits per pixel.

**no\_gray\_quant\_update**: This is a one bit flag which is set to '1' when a fixed quantiser is used for the decoding of grayscale alpha data. When this flag is set to '0', the grayscale alpha quantiser is updated on every macroblock by generating it anew from the luminance quantiser value, but with an appropriate scale factor applied. See the description in subclause 7.5.4.3.

**composition\_method**: This is a one bit flag which indicates which blending method is to be applied to the video object in the compositor. When set to '0', cross-fading shall be used. When set to '1', additive mixing shall be used. See subclause 7.5.4.6.

**linear\_composition**: This is a one bit flag which indicates the type of signal used by the compositing process. When set to '0', the video signal in the format from which it was produced by the video decoder is used. When set to '1', linear signals are used. See subclause 7.5.4.6.

**quant\_type**: This is a one-bit flag which when set to '1' that the first inverse quantisation method and when set to '0' indicates that the second inverse quantisation method is used for inverse quantisation of the DCT coefficients. Both inverse quantisation methods are described in subclause 7.4.4. For the first inverse quantization method, two matrices are used, one for intra blocks the other for non-intra blocks.

The default matrix for intra blocks is:

8	17	18	19	21	23	25	27
17	18	19	21	23	25	27	28
20	21	22	23	24	26	28	30
21	22	23	24	26	28	30	32
22	23	24	26	28	30	32	35
23	24	26	28	30	32	35	38
25	26	28	30	32	35	38	41
27	28	30	32	35	38	41	45

The default matrix for non-intra blocks is:

16	17	18	19	20	21	22	23
17	18	19	20	21	22	23	24
18	19	20	21	22	23	24	25
19	20	21	22	23	24	26	27
20	21	22	23	25	26	27	28
21	22	23	24	26	27	28	30
22	23	24	26	27	28	30	31
23	24	25	27	28	30	31	33

**load\_intra\_quant\_mat:** This is a one-bit flag which is set to '1' when intra\_quant\_mat follows. If it is set to '0' then there is no change in the values that shall be used.

**intra\_quant\_mat:** This is a list of 2 to 64 eight-bit unsigned integers. The new values are in zigzag scan order and replace the previous values. A value of 0 indicates that no more values are transmitted and the remaining, non-transmitted values are set equal to the last non-zero value. The first value shall always be 8 and is not used in the decoding process.

**load\_nonintra\_quant\_mat:** This is a one-bit flag which is set to '1' when nonintra\_quant\_mat follows. If it is set to '0' then there is no change in the values that shall be used.

**nonintra\_quant\_mat:** This is a list of 2 to 64 eight-bit unsigned integers. The new values are in zigzag scan order and replace the previous values. A value of 0 indicates that no more values are transmitted and the remaining, non-transmitted values are set equal to the last non-zero value. The first value shall not be 0.

**load\_intra\_quant\_mat\_grayscale:** This is a one-bit flag which is set to '1' when intra\_quant\_mat\_grayscale follows. If it is set to '0' then there is no change in the quantisation matrix values that shall be used.

**intra\_quant\_mat\_grayscale:** This is a list of 2 to 64 eight-bit unsigned integers defining the grayscale intra alpha quantisation matrix to be used. The semantics and the default quantisation matrix are identical to those of intra\_quant\_mat.

**load\_nonintra\_quant\_mat\_grayscale:** This is a one-bit flag which is set to '1' when nonintra\_quant\_mat\_grayscale follows. If it is set to '0' then there is no change in the quantisation matrix values that shall be used.

**nonintra\_quant\_mat\_grayscale:** This is a list of 2 to 64 eight-bit unsigned integers defining the grayscale nonintra alpha quantisation matrix to be used. The semantics and the default quantisation matrix are identical to those of nonintra\_quant\_mat.

**complexity\_estimation\_disable:** This is a one-bit flag which, when set to '1', disables complexity estimation header in each VOP.

**estimation\_method :** Setting of the of the estimation method,it is „00“ for Version 1.

**shape\_complexity\_estimation\_disable:** This is a one-bit flag which when set to '1' disables shape complexity estimation.

**opaque:** Flag enabling transmission of the number of luminance and chrominance blocks coded using opaque coding mode in % of the total number of blocks (bounding rectangle).

**transparent:** Flag enabling transmission of the number of luminance and chrominance blocks coded using transparent mode in % of the total number of blocks (bounding rectangle).

**intra\_cae:** Flag enabling transmission of the number of luminance and chrominance blocks coded using IntraCAE coding mode in % of the total number of blocks (bounding rectangle).

**inter\_cae:** Flag enabling transmission of the number of luminance and chrominance blocks coded using InterCAE coding mode in % of the total number of blocks (bounding rectangle).

**no\_update:** Flag enabling transmission of the number of luminance and chrominance blocks coded using no update coding mode in % of the total number of blocks (bounding rectangle).

**upsampling:** Flag enabling transmission of the number of luminance and chrominance blocks which need upsampling from 4-4- to 8-8 block dimensions in % of the total number of blocks (bounding rectangle).

**texture\_complexity\_estimation\_set\_1\_disable:** Flag to disable texture parameter set 1.

**intra\_blocks:** Flag enabling transmission of the number of luminance and chrominance Intra or Intra+Q coded blocks in % of the total number of blocks (bounding rectangle).

**inter\_blocks:** Flag enabling transmission of the number of luminance and chrominance Inter and Inter+Q coded blocks in % of the total number of blocks (bounding rectangle).

**inter4v\_blocks:** Flag enabling transmission of the number of luminance and chrominance Inter4V coded blocks in % of the total number of blocks (bounding rectangle).

**not\_coded\_blocks:** Flag enabling transmission of the number of luminance and chrominance Non Coded blocks in % of the total number of blocks (bounding rectangle).

**texture\_complexity\_estimation\_set\_2\_disable:** Flag to disable texture parameter set 2.

**dct\_coefs:** Flag enabling transmission of the number of DCT coefficients % of the maximum number of coefficients (coded blocks).

**dct\_lines:** Flag enabling transmission of the number of DCT8x1 in % of the maximum number of DCT8x1 (coded blocks).

**vlc\_symbols:** Flag enabling transmission of the average number of VLC symbols for macroblock.

**vlc\_bits:** Flag enabling transmission of the average number of bits for each symbol.

**motion\_compensation\_complexity\_disable:** Flag to disable motion compensation parameter set.

**apm** (Advanced Prediction Mode): Flag enabling transmission of the number of luminance block predicted using APM in % of the total number of blocks for VOP (bounding rectangle).

**npm** (Normal Prediction Mode): Flag enabling transmission of the number of luminance and chrominance blocks predicted using NPM in % of the total number of luminance and chrominance for VOP (bounding rectangle).

**interpolate\_mc\_q**: Flag enabling transmission of the number of luminance and chrominance interpolated blocks in % of the total number of blocks for VOP (bounding rectangle).

**forw\_back\_mc\_q**: Flag enabling transmission of the number of luminance and chrominance predicted blocks in % of the total number of blocks for VOP (bounding rectangle).

**halfpel2**: Flag enabling transmission of the number of luminance and chrominance block predicted by a half-pel vector on one dimension (horizontal or vertical) in % of the total number of blocks (bounding rectangle).

**halfpel4**: Flag enabling transmission of the number of luminance and chrominance block predicted by a half-pel vector on two dimensions (horizontal and vertical) in % of the total number of blocks (bounding rectangle).

**resync\_marker\_disable**: This is a one-bit flag which when set to '1' indicates that there is no resync\_marker in coded VOPs. This flag can be used only for the optimization of the decoder operation. Successful decoding can be carried out without taking into account the value of this flag.

**data\_partitioned**: This is a one-bit flag which when set to '1' indicates that the macroblock data is rearranged differently, specifically, motion vector data is separated from the texture data (i.e., DCT coefficients).

**reversible\_vlc**: This is a one-bit flag which when set to '1' indicates that the reversible variable length tables (Table B-23, Table B-24 and Table B-25) should be used when decoding DCT coefficients. These tables can only be used when data\_partition flag is enabled. Note that this flag shall be treated as '0' in B-VOPs. Use of escape sequence (Table B-24 and Table B-25) for encoding the combinations listed in Table B-23 is prohibited.

**scalability**: This is a one-bit flag which when set to '1' indicates that the current layer uses scalable coding. If the current layer is used as base-layer then this flag is set to '0'.

**hierarchy\_type**: The hierarchical relation between the associated hierarchy layer and its hierarchy embedded layer is defined as shown in Table 6-18.

**Table 6-18 -- Code table for hierarchy\_type**

Description	Code
ISO/IEC 14496-2 Spatial Scalability	0
ISO/IEC 14496-2 Temporal Scalability	1

**ref\_layer\_id**: This is a 4-bit unsigned integer with value between 0 and 15. It indicates the layer to be used as reference for prediction(s) in the case of scalability.

**ref\_layer\_sampling\_direc**: This is a one-bit flag which when set to '1' indicates that the resolution of the reference layer (specified by reference\_layer\_id) is higher than the resolution of the layer being coded. If it is set to '0' then the reference layer has the same or lower resolution than the resolution of the layer being coded.

**hor\_sampling\_factor\_n**: This is a 5-bit unsigned integer which forms the numerator of the ratio used in horizontal spatial resampling in scalability. The value of zero is forbidden.

**hor\_sampling\_factor\_m**: This is a 5-bit unsigned integer which forms the denominator of the ratio used in horizontal spatial resampling in scalability. The value of zero is forbidden.

**vert\_sampling\_factor\_n**: This is a 5-bit unsigned integer which forms the numerator of the ratio used in vertical spatial resampling in scalability. The value of zero is forbidden.

**vert\_sampling\_factor\_m**: This is a 5-bit unsigned integer which forms the denominator of the ratio used in vertical spatial resampling in scalability. The value of zero is forbidden.

**enhancement\_type**: This is a 1-bit flag which is set to '1' when the current layer enhances the partial region of the reference layer. If it is set to '0' then the current layer enhances the entire region of the reference layer. The default value of this flag is '0'.

### 6.3.4 Group of Video Object Plane

**group\_vop\_start\_code**•••The group\_vop\_start\_code is the bit string '000001B3' in hexadecimal. It identifies the beginning of a GOV header.

**time\_code**•••This is a 18-bit integer containing the following: time\_code\_hours, time\_code\_minutes, marker\_bit and time\_code\_seconds as shown in Table 6-19. The parameters correspond to those defined in the IEC standard publication 461 for "time and control codes for video tape recorders". The time code specifies the modulo part (i.e. the full second units) of the time base for the first object plane (in display order) after the GOV header.

**Table 6-19 -- Meaning of time\_code**

time_code	range of value	No. of bits	Mnemonic
time_code_hours	0 - 23	5	uimsbf
time_code_minutes	0 - 59	6	uimsbf
marker_bit	1	1	bslbf
time_code_seconds	0 - 59	6	uimsbf

**closed\_gov**•••This is a one-bit flag which indicates the nature of the predictions used in the first consecutive B-VOPs (if any) immediately following the first coded I-VOP after the GOV header .The closed\_gov is set to '1' to indicate that these B-VOPs have been encoded using only backward prediction or intra coding. This bit is provided for use during any editing which occurs after encoding. If the previous pictures have been removed by editing, broken\_link may be set to '1' so that a decoder may avoid displaying these B-VOPs following the first I-VOP following the group of plane header. However if the closed\_gov bit is set to '1', then the editor may choose not to set the broken\_link bit as these B-VOPs can be correctly decoded.

**broken\_link**•••This is a one-bit flag which shall be set to '0' during encoding. It is set to '1' to indicate that the first consecutive B-VOPs (if any) immediately following the first coded I-VOP following the group of plane header may not be correctly decoded because the reference frame which is used for prediction is not available (because of the action of editing). A decoder may use this flag to avoid displaying frames that cannot be correctly decoded.

### 6.3.5 Video Object Plane and Video Plane with Short Header

**vop\_start\_code**: This is the bit string '000001B6' in hexadecimal. It marks the start of a video object plane.

**vop\_coding\_type**: The vop\_coding\_type identifies whether a VOP is an intra-coded VOP (I), predictive-coded VOP (P), bidirectionally predictive-coded VOP (B) or sprite coded VOP (S). The meaning of vop\_coding\_type is defined in Table 6-20.

**Table 6-20 -- Meaning of vop\_coding\_type**

vop_coding_type	coding method
00	intra-coded (I)
01	predictive-coded (P)
10	bidirectionally-predictive-coded (B)
11	sprite (S)

**modulo\_time\_base:** This value represents the local time base in one second resolution units (1000 milliseconds). It consists of a number of consecutive '1' followed by a '0'. Each '1' represents a duration of one second that have elapsed. For I- and P-VOPs of a non scalable bitstream and the base layer of a scalable bitstream, the number of '1's indicate the number of seconds elapsed since the synchronization point marked by time\_code of the previous GOV header or by modulo\_time\_base of the previously decoded I- or P-VOP, in decoding order. For B-VOP of non scalable bitstream and base layer of scalable bitstream, the number of '1's indicate the number of seconds elapsed since the synchronization point marked in the previous GOV header, I-VOP, or P-VOP, in display order. For I-, P-, or B-VOPs of enhancement layer of scalable bitstream, the number of '1's indicate the number of seconds elapsed since the synchronization point marked in the previous GOV header, I-VOP, P-VOP, or B-VOP, in display order.

**vop\_time\_increment:** This value represents the absolute vop\_time\_increment from the synchronization point marked by the modulo\_time\_base measured in the number of clock ticks. It can take a value in the range of [0,vop\_time\_increment\_resolution). The number of bits representing the value is calculated as the minimum number of unsigned integer bits required to represent the above range. The local time base in the units of seconds is recovered by dividing this value by the vop\_time\_increment\_resolution.

**vop\_coded:** This is a 1-bit flag which when set to '0' indicates that no subsequent data exists for the VOP. In this case, the following decoding rule applies: For an arbitrarily shaped VO (i.e. when the shape type of the VO is either 'binary' or 'binary only'), the alpha plane of the reconstructed VOP shall be completely transparent. For a rectangular VO (i.e. when the shape type of the VO is 'rectangular'), the corresponding rectangular alpha plane of the VOP, having the same size as its luminance component, shall be completely transparent. If there is no alpha plane being used in the decoding and composition process of a rectangular VO, the reconstructed VOP is filled with the respective content of the immediately preceding VOP for which vop\_coded!=0.

**vop\_rounding\_type:** This is a one-bit flag which signals the value of the parameter rounding\_control used for pixel value interpolation in motion compensation for P-VOPs. When this flag is set to '0', the value of rounding\_control is 0, and when this flag is set to '1', the value of rounding\_control is 1. When vop\_rounding\_type is not present in the VOP header, the value of rounding\_control is 0.

**vop\_width:** This is a 13-bit unsigned integer which specifies the horizontal size, in pixel units, of the rectangle that includes the VOP. The width of the encoded luminance component of VOP in macroblocks is  $(vop\_width+15)/16$ . The rectangle part is left-aligned in the encoded VOP. A zero value is forbidden.

**vop\_height:** This is a 13-bit unsigned integer which specifies the vertical size, in pixel units, of the rectangle that includes the VOP. The height of the encoded luminance component of VOP in macroblocks is  $(vop\_height+15)/16$ . The rectangle part is top-aligned in the encoded VOP. A zero value is forbidden.

**vop\_horizontal\_mc\_spatial\_ref:** This is a 13-bit signed integer which specifies, in pixel units, the horizontal position of the top left of the rectangle defined by horizontal size of vop\_width. The value of vop\_horizontal\_mc\_spatial\_ref shall be divisible by two. This is used for decoding and for picture composition.

**vop\_vertical\_mc\_spatial\_ref:** This is a 13-bit signed integer which specifies, in pixel units, the vertical position of the top left of the rectangle defined by vertical size of vop\_width. The value of vop\_vertical\_mc\_spatial\_ref shall be divisible by two for progressive and divisible by four for interlaced motion compensation. This is used for decoding and for picture composition.

**background\_composition:** This flag only occurs when scalability flag has a value of "1". This\_flag is used in conjunction with enhancement\_type flag. If enhancement\_type is "1" and this flag is "1", background composition specified in subclause 8.1 is performed. If enhancement type is "1" and this flag is "0", any method can be used to make a background for the enhancement layer.

**change\_conv\_ratio\_disable:** This is a 1-bit flag which when set to '1' indicates that conv\_ratio is not sent at the macroblock layer and is assumed to be 1 for all the macroblocks of the VOP. When set to '0', the conv\_ratio is coded at macroblock layer.

**vop\_constant\_alpha:** This bit is used to indicate the presence of vop\_constant\_alpha\_value. When this is set to one, vop\_constant\_alpha\_value is included in the bitstream.

**vop\_constant\_alpha\_value:** This is an unsigned integer which indicates the scale factor to be applied as a post processing phase of binary or grayscale shape decoding. See subclause 7.5.4.2.

**intra\_dc\_vlc\_thr:** This is a 3-bit code allows a mechanism to switch between two VLC's for coding of Intra DC coefficients as per Table 6-21.

Table 6-21 -- Meaning of intra\_dc\_vlc\_thr

index	meaning of intra_dc_vlc_thr	code
0	Use Intra DC VLC for entire VOP	000
1	Switch to Intra AC VLC at running Qp $\geq 13$	001
2	Switch to Intra AC VLC at running Qp $\geq 15$	010
3	Switch to Intra AC VLC at running Qp $\geq 17$	011
4	Switch to Intra AC VLC at running Qp $\geq 19$	100
5	Switch to Intra AC VLC at running Qp $\geq 21$	101
6	Switch to Intra AC VLC at running Qp $\geq 23$	110
7	Use Intra AC VLC for entire VOP	111

Where running Qp is defined as the DCT quantization parameter for luminance and chrominance used for immediately previous coded macroblock, except for the first coded macroblock in a VOP or a video packet. At the first coded macroblock in a VOP or a video packet, the running Qp is defined as the quantization parameter value for the current macroblock.

**top\_field\_first:** This is a 1-bit flag which when set to "1" indicates that the top field (i.e., the field containing the top line) of reconstructed VOP is the first field to be displayed (output by the decoding process). When top\_field\_first is set to "0" it indicates that the bottom field of the reconstructed VOP is the first field to be displayed.

**alternate\_vertical\_scan\_flag:** This is a 1-bit flag which when set to "1" indicates the use of alternate vertical scan for interlaced VOPs.

**sprite\_transmit\_mode:** This is a 2-bit code which signals the transmission mode of the sprite object. At video object layer initialization, the code is set to "piece" mode. When all object and quality update pieces are sent for the entire video object layer, the code is set to the "stop" mode. When an object piece is sent, the code is set to "piece" mode. When an update piece is being sent, the code is set to the "update" mode. When all sprite object pieces and quality update pieces for the current VOP are sent, the code is set to "pause" mode. Table 6-22 shows the different sprite transmit modes.

Table 6-22 -- Meaning of sprite transmit modes

code	sprite_transmit_mode
00	stop
01	piece
10	update
11	pause

**vop\_quant:** This is an unsigned integer which specifies the absolute value of quant to be used for dequantizing the macroblock until updated by any subsequent dquant, dbquant, or quant\_scale. The length of this field is specified by the value of the parameter quant\_precision. The default length is 5-bits which carries the binary representation of quantizer values from 1 to 31 in steps of 1.

**vop\_alpha\_quant:** This is a an unsigned integer which specifies the absolute value of the initial alpha plane quantiser to be used for dequantising macroblock grayscale alpha data. The alpha plane quantiser cannot be less than 1.

**vop\_fcode\_forward:** This is a 3-bit unsigned integer taking values from 1 to 7; the value of zero is forbidden. It is used in decoding of motion vectors.

**vop\_fcode\_backward:** This is a 3-bit unsigned integer taking values from 1 to 7; the value of zero is forbidden. It is used in decoding of motion vectors.

**vop\_shape\_coding\_type:** This is a 1 bit flag which specifies whether inter shape decoding is to be carried out for the current P VOP. If vop\_shape\_coding\_type is equal to '0', intra shape decoding is carried out, otherwise inter shape decoding is carried out.

Coded data for the top-left macroblock of the bounding rectangle of a VOP shall immediately follow the VOP header, followed by the remaining macroblocks in the bounding rectangle in the conventional left-to-right, top-to-bottom scan order. Video packets shall also be transmitted following the conventional left-to-right, top-to-bottom macroblock scan order. The last MB of one video packet is guaranteed to immediately precede the first MB of the following video packet in the MB scan order.

**load\_backward\_shape:** This is a one-bit flag which when set to '1' implies that the backward shape of the previous VOP in the same layer is copied to the forward shape for the current VOP and the backward shape of the current VOP is decoded from the bitstream. When this flag is set to '0', the forward shape of the previous VOP is copied to the forward\_shape of the current VOP and the backward shape of the previous VOP in the same layer is copied to the backward shape of the current VOP. This flag shall be '1' when (1) background\_composition is '1' and vop\_coded of the previous VOP in the same layer is '0' or (2) background\_composition is '1' and the current VOP is the first VOP in the current layer.

**backward\_shape\_width:** This is a 13-bit unsigned integer which specifies the horizontal size, in pixel units, of the rectangle that includes the backward shape. A zero value is forbidden.

**backward\_shape\_height:** This is a 13-bit unsigned integer which specifies the vertical size, in pixel units, of the rectangle that includes the backward shape. A zero value is forbidden.

**backward\_shape\_horizontal\_mc\_spatial\_ref:** This is a 13-bit signed integer which specifies, in pixel units, the horizontal position of the top left of the rectangle that includes the backward shape. This is used for decoding and for picture composition.

**backward\_shape\_vertical\_mc\_spatial\_ref:** This is a 13-bit signed integer which specifies, in pixel units, the vertical position of the top left of the rectangle that includes the backward shape. This is used for decoding and for picture composition.

**backward\_shape():** The decoding process of the backward shape is identical to the decoding process for the shape of I-VOP with binary only mode (video\_object\_layer\_shape = "10").

**load\_forward\_shape:** This is a one-bit flag which when set to '1' implies that the forward shape is decoded from the bitstream. This flag shall be '1' when (1) background\_composition is '1' and vop\_coded of the previous VOP in the same layer is '0' or (2) background\_composition is '1' and the current VOP is the first VOP in the current layer.

**forward\_shape\_width:** This is a 13-bit unsigned integer which specifies the horizontal size, in pixel units, of the rectangle that includes the forward shape. A zero value is forbidden.

**forward\_shape\_height:** This is a 13-bit unsigned integer which specifies the vertical size, in pixel units, of the rectangle that includes the forward shape. A zero value is forbidden.

**forward\_shape\_horizontal\_mc\_spatial\_ref:** This is a 13-bit signed integer which specifies, in pixel units, the horizontal position of the top left of the rectangle that includes the forward shape. This is used for decoding and for picture composition.

**forward\_shape\_vertical\_mc\_spatial\_ref:** This is a 13-bit signed integer which specifies, in pixel units, the vertical position of the top left of the rectangle that includes the forward shape. This is used for decoding and for picture composition.

**forward\_shape():** The decoding process of the backward shape is identical to the decoding process for the shape of I-VOP with binary only mode (video\_object\_layer\_shape = "10").

**ref\_select\_code:** This is a 2-bit unsigned integer which specifies prediction reference choices for P- and B-VOPs in enhancement layer with respect to decoded reference layer identified by ref\_layer\_id. The meaning of allowed values is specified in Table 7-13 and Table 7-14.

**resync\_marker:** This is a binary string of at least 16 zero's followed by a one'0 0000 0000 0000 0001'. For an I-VOP or a VOP where video\_object\_layer\_shape has the value "binary\_only", the resync marker is 16 zeros followed by a one. The length of this resync marker is dependent on the value of vop\_fcode\_forward, for a P-VOP, and the larger value of either vop\_fcode\_forward and vop\_fcode\_backward for a B-VOP. The relationship between the length of the resync\_marker and appropriate fcode is given by  $16 + \text{fcode}$ . The resync\_marker is  $(15+\text{fcode})$  zeros followed by a one. It is only present when resync\_marker\_disable flag is set to '0'. A resync marker shall only be located immediately before a macroblock and aligned with a byte

**macroblock\_number:** This is a variable length code with length between 1 and 14 bits. It identifies the macroblock number within a VOP. The number of the top-left macroblock in a VOP shall be zero. The macroblock number increases from left to right and from top to bottom. The actual length of the code depends on the total number of macroblocks in the VOP calculated according to Table 6-23, the code itself is simply a binary representation of the macroblock number.

Table 6-23 -- Length of macroblock\_number code

length of macroblock_number code	$((\text{vop\_width}+15)/16) * (\text{vop\_height}+15)/16)$
1	1-2
2	3-4
3	5-8
4	9-16
5	17-32
6	33-64
7	65-128
8	129-256
9	257-512
10	513-1024
11	1025-2048
12	2049-4096
13	4097-8192
14	8193-16384

**quant\_scale:** This is an unsigned integer which specifies the absolute value of quant to be used for dequantizing the macroblock of the video packet until updated by any subsequent dquant. The length of this field is specified by the value of the parameter quant\_precision. The default length is 5-bits.

**header\_extension\_code:** This is a 1-bit flag which when set to '1' indicates the presence of additional fields in the header. When header\_extension\_code is set to '1', modulo\_time\_base, vop\_time\_increment and vop\_coding\_type are also included in the video packet header. Furthermore, if the vop\_coding\_type is equal to either a P or B VOP, the appropriate fcodes are also present.

**use\_intra\_dc\_vlc:** The value of this internal flag is set to 1 when the values of intra\_dc\_thr and the DCT quantiser for luminance and chrominance indicate the usage of the intra DC VLCs shown in Table B-13 - Table B-15 for the decoding of intra DC coefficients. Otherwise, the value of this flag is set to 0.

**motion\_marker:** This is a 17-bit binary string '1 1111 0000 0000 0001'. It is only present when the data\_partitioned flag is set to '1'. In the data partitioning mode, a motion\_marker is inserted after the motion data (prior to the texture data). The motion\_marker is unique from the motion data and enables the decoder to determine when all the motion information has been received correctly.

**dc\_marker:** This is a 19 bit binary string '110 1011 0000 0000 0001'. It is present when the data\_partitioned flag is set to '1'. It is used for I-VOPs. In the data partitioning mode, a dc\_marker is inserted into the bitstream after the mcbpc, dquant and dc data but before the ac\_pred flag and remaining texture information.

### 6.3.5.1 Definition of DCECS variable values

The semantic of all complexity estimation parameters is defined at the VO syntax level. DCECS variables represent % values. The actual % values have been converted to 8 bit words by normalization to 256. To each 8 bit word a binary 1 is added to prevent start code emulation (i.e 0% = '00000001', 99.5% = '11111111' and is conventionally considered equal to one). The binary '00000000' string is a forbidden value. The only parameter expressed in their absolute value is the dcecs\_vlc\_bits parameter expressed as a 4 bit word.

**dcecs\_opaque:** 8 bit number representing the % of luminance and chrominance blocks using opaque coding mode on the total number of blocks (bounding rectangle).

**dcecs\_transparent:** 8 bit number representing the % of luminance and chrominance blocks using transparent coding mode on the total number of blocks (bounding rectangle).

**dcecs\_intra\_cae:** 8 bit number representing the % of luminance and chrominance blocks using IntraCAE coding mode on the total number of blocks (bounding rectangle).

**dcecs\_inter\_cae:** 8 bit number representing the % of luminance and chrominance blocks using InterCAE coding mode on the total number of blocks (bounding rectangle).

**dcecs\_no\_update:** 8 bit number representing the % of luminance and chrominance blocks using no update coding mode on the total number of blocks (bounding rectangle).

**dcecs\_upsampling:** 8 bit number representing the % of luminance and chrominance blocks which need upsampling from 4-4- to 8-8 block dimensions on the total number of blocks (bounding rectangle).

**dcecs\_intra\_blocks:** 8 bit number representing the % of luminance and chrominance Intra or Intra+Q coded blocks on the total number of blocks (bounding rectangle).

**dcecs\_not\_coded\_blocks:** 8 bit number representing the % of luminance and chrominance Non Coded blocks on the total number of blocks (bounding rectangle).

**dcecs\_dct\_coefs:** 8 bit number representing the % of the number of DCT coefficients on the maximum number of coefficients (coded blocks).

**dcecs\_dct\_lines:** 8 bit number representing the % of the number of DCT8x1 on the maximum number of DCT8x1 (coded blocks).

**dcecs\_vlc\_symbols:** 8 bit number representing the average number of VLC symbols for macroblock.

**dcecs\_vlc\_bits:** 4 bit number representing the average number of bits for each symbol.

**dcecs\_inter\_blocks:** 8 bit number representing the % of luminance and chrominance Inter and Inter+Q coded blocks on the total number of blocks (bounding rectangle).

**dcecs\_inter4v\_blocks:** 8 bit number representing the % of luminance and chrominance Inter4V coded blocks on the total number of blocks (bounding rectangle).

**dcecs\_apm** (Advanced Prediction Mode): 8 bit number representing the % of the number of luminance block predicted using APM on the total number of blocks for VOP (bounding rectangle).

**dcecs\_npm** (Normal Prediction Mode): 8 bit number representing the % of luminance and chrominance blocks predicted using NPM on the total number of luminance and chrominance blocks for VOP (bounding rectangle).

**dcecs\_forw\_back\_mc\_q:** 8 bit number representing the % of luminance and chrominance predicted blocks on the total number of blocks for VOP (bounding rectangle).

**dcecs\_halfpel2:** 8 bit number representing the % of luminance and chrominance blocks predicted by a half-pel vector on one dimension (horizontal or vertical) on the total number of blocks (bounding rectangle).

**dcecs\_halfpel4:** 8 bit number representing the % of luminance and chrominance blocks predicted by a half-pel vector on two dimensions (horizontal and vertical) on the total number of blocks (bounding rectangle).

**dcecs\_interpolate\_mc\_q:** 8 bit number representing the % of luminance and chrominance interpolated blocks in % of the total number of blocks for VOP (bounding rectangle).

### 6.3.5.2 Video Plane with Short Header

`video_plane_with_short_header()` – This data structure contains a video plane using an abbreviated header format. Certain values of parameters shall have pre-defined and fixed values for any `video_plane_with_short_header`, due to the limited capability of signaling information in the short header format. These parameters having fixed values are shown in Table 6-24.

**Table 6-24 -- Fixed Settings for `video_plane_with_short_header()`**

Parameter	Value
<code>video_object_layer_shape</code>	“rectangular”
<code>obmc_disable</code>	1
<code>quant_type</code>	0
<code>resync_marker_disable</code>	1
<code>data_partitioned</code>	0
<code>block_count</code>	6
<code>reversible_vlc</code>	0
<code>vop_rounding_type</code>	0
<code>vop_fcode_forward</code>	1
<code>vop_coded</code>	1
<code>interlaced</code>	0
<code>complexity_estimation_disable</code>	1
<code>use_intra_dc_vlc</code>	0
<code>scalability</code>	0
<code>not_8_bit</code>	0
<code>bits_per_pixel</code>	8
<code>colour_primaries</code>	1
<code>transfer_characteristics</code>	1
<code>matrix_coefficients</code>	6

**short\_video\_start\_marker:** This is a 22-bit start marker containing the value ‘0000 0000 0000 0000 1000 00’. It is used to mark the location of a video plane having the short header format. `short_video_start_marker` shall be byte aligned by the insertion of zero to seven zero-valued bits as necessary to achieve byte alignment prior to `short_video_start_marker`.

**temporal\_reference**: This is an 8-bit number which can have 256 possible values. It is formed by incrementing its value in the previously transmitted `video_plane_with_short_header()` by one plus the number of non-transmitted pictures (at 30000/1001 Hz) since the previously transmitted picture. The arithmetic is performed with only the eight LSBs.

**split\_screen\_indicator**: This is a boolean signal that indicates that the upper and lower half of the decoded picture could be displayed side by side. This bit has no direct effect on the encoding or decoding of the video plane.

**document\_camera\_indicator**: This is a boolean signal that indicates that the video content of the vop is sourced as a representation from a document camera or graphic representation, as opposed to a view of natural video content. This bit has no direct effect on the encoding or decoding of the video plane.

**full\_picture\_freeze\_release**: This is a boolean signal that indicates that resumption of display updates should be activated if the display of the video content has been frozen due to errors, packet losses, or for some other reason such as the receipt of a external signal. This bit has no direct effect on the encoding or decoding of the video plane.

**source\_format**: This is an indication of the width and height of the rectangular video plane represented by the `video_plane_with_short_header`. The meaning of this field is shown in Table 6-25. Each of these source formats has the same vop time increment resolution which is equal to 30000/1001 (approximately 29.97) Hz and the same width:height pixel aspect ratio (288/3):(352/4), which equals 12:11 in relatively prime numbers and which defines a CIF picture as having a width:height picture aspect ratio of 4:3.

Table 6-25 -- Parameters Defined by `source_format` Field

<code>source_format</code> value	Source Format Meaning	<code>vop_width</code>	<code>vop_height</code>	<code>num_macroblocks_in_gob</code>	<code>num_gobs_in_vop</code>
000	reserved	reserved	reserved	reserved	reserved
001	sub-QCIF	128	96	8	6
010	QCIF	176	144	11	9
011	CIF	352	288	22	18
100	4CIF	704	576	88	18
101	16CIF	1408	1152	352	18
110	reserved	reserved	reserved	reserved	reserved
111	reserved	reserved	reserved	reserved	reserved

**picture\_coding\_type**: This bit indicates the `vop_coding_type`. When equal to zero, the `vop_coding_type` is "I", and when equal to one, the `vop_coding_type` is "P".

**four\_reserved\_zero\_bits**: This is a four-bit field containing bits which are reserved for future use and equal to zero.

**pei**: This is a single bit which, when equal to one, indicates the presence of a byte of psupp data following the pei bit.

**psupp**: This is an eight bit field which is present when pei is equal to one. The pei + psupp mechanism provides for a reserved method of later allowing the definition of backward-compatible data to be added to the bitstream. Decoders shall accept and discard psupp when pei is equal to one, with no effect on the decoding of the video data. The pei and psupp combination pair may be repeated if present. The ability for an encoder to add pei and psupp to the bitstream is reserved for future use.

**gob\_number**: This is a five-bit number which indicates the location of video data within the video plane. A group of blocks (or GOB) contains a number of macroblocks in raster scanning order within the picture. For a given gob\_number, the GOB contains the `num_macroblocks_per_gob` macroblocks starting with `macroblock_number` =

gob\_number \* num\_macroblocks\_per\_gob. The gob\_number can either be read from the bitstream or inferred from the progress of macroblock decoding as shown in the syntax description pseudo-code.

**num\_gobs\_in\_vop:** This is the number of GOBs in the vop. This parameter is derived from the source\_format as shown in Table 6-25.

**gob\_layer():** This is a layer containing a fixed number of macroblocks in the vop. Which macroblocks which belong to each gob can be determined by gob\_number and num\_macroblocks\_in\_gob.

**gob\_resync\_marker:** This is a fixed length code of 17 bits having the value '0000 0000 0000 0000 1' which may optionally be inserted at the beginning of each gob\_layer(). Its purpose is to serve as a type of resynchronization marker for error recovery in the bitstream. The gob\_resync\_marker codes may (and should) be byte aligned by inserting zero to seven zero-valued bits in the bitstream just prior to the gob\_resync\_marker in order to obtain byte alignment. The gob\_resync\_marker shall not be present for the first GOB (for which gob\_number = 0).

**gob\_number:** This is a five-bit number which indicates which GOB is being processed in the vop. Its value may either be read following a gob\_resync\_marker or may be inferred from the progress of macroblock decoding. All GOBs shall appear in the bitstream of each video\_plane\_with\_short\_header(), and the GOBs shall appear in a strictly increasing order in the bitstream. In other words, if a gob\_number is read from the bitstream after a gob\_resync\_marker, its value must be the same as the value that would have been inferred in the absence of the gob\_resync\_marker.

**gob\_frame\_id:** This is a two bit field which is intended to help determine whether the data following a gob\_resync\_marker can be used in cases for which the vop header of the video\_plane\_with\_short\_header() may have been lost. gob\_frame\_id shall have the same value in every GOB header of a given video\_plane\_with\_short\_header(). Moreover, if any field among the split\_screen\_indicator or document\_camera\_indicator or full\_picture\_freeze\_release or source\_format or picture\_coding\_type as indicated in the header of a video\_plane\_with\_short\_header() is the same as for the previous transmitted picture in the same video object, gob\_frame\_id shall have the same value as in that previous video\_plane\_with\_short\_header(). However, if any of these fields in the header of a certain video\_plane\_with\_short\_header() differs from that in the previous transmitted video\_plane\_with\_short\_header() of the same video object, the value for gob\_frame\_id in that picture shall differ from the value in the previous picture.

**num\_macroblocks\_in\_gob:** This is the number of macroblocks in each group of blocks (GOB) unit. This parameter is derived from the source\_format as shown in Table 6-25.

**short\_video\_end\_marker:** This is a 22-bit end of sequence marker containing the value '0000 0000 0000 0000 1111 11'. It is used to mark the end of a sequence of video\_plane\_with\_short\_header(). short\_video\_end\_marker may (and should) be byte aligned by the insertion of zero to seven zero-valued bits to achieve byte alignment prior to short\_video\_end\_marker.

### 6.3.5.3 Shape coding

**bab\_type:** This is a variable length code between 1 and 7 bits. It indicates the coding mode used for the bab. There are seven bab\_types as depicted in Table 6-26. The VLC tables used depend on the decoding context i.e. the bab\_types of blocks already received. For I-VOPs, the context-switched VLC table of Table B-27 is used. For P-VOPs and B-VOPs, the context switched table of Table B-28 is used.

Table 6-26 -- List of bab\_types and usage

bab_type	Semantic	Used in
0	MVDs==0 && No Update	P,B VOPs
1	MVDs!=0 && No Update	P,B VOPs
2	transparent	All VOP types
3	opaque	All VOP types
4	intraCAE	All VOP types

5	MVDs==0 && interCAE	P,B VOPs
6	MVDs!=0 && interCAE	P,B VOPs

The bab\_type determines what other information fields will be present for the bab shape. No further shape information is present if the bab\_type = 0, 2 or 3. Opaque means that all pixels of the bab are part of the object. Transparent means that none of the bab pixels belong to the object. IntraCAE means the intra-mode CAE decoding will be required to reconstruct the pixels of the bab. No\_update means that motion compensation is used to copy the bab from the previous VOP's binary alpha map. InterCAE means the motion compensation and inter\_mode CAE decoding are used to reconstruct the bab. MVDs refers to the motion vector difference for shape.

**mvds\_x**: This is a VLC code between 1 and 18 bits. It represents the horizontal element of the motion vector difference for the bab. The motion vector difference is in full integer precision. The VLC table is shown in Table B-29.

**mvds\_y**: This is a VLC code between 1 and 18 bits. It represents the vertical element of the motion vector difference for the bab. The motion vector difference is in full integer precision. If mvds\_x is '0' then the VLC table of Table B-30, otherwise the VLC table of Table B-29 is used.

**conv\_ratio**: This is VLC code of length 1-2 bits. It specifies the factor used for sub-sampling the 16x16 pixel bab. The decoder must up-sample the decoded bab by this factor. The possible values for this factor are 1, 2 and 4 and the VLC table used is given in Table B-31.

**scan\_type**: This is a 1-bit flag where a value of '0' implies that the bab is in transposed form i.e. the BAB has been transposed prior to coding. The decoder must then transpose the bab back to its original form following decoding. If this flag is '1', then no transposition is performed.

**binary\_arithmetic\_code()**: This is a binary arithmetic decoder representing the pixel values of the bab. This code may be generated by intra cae or inter cae depending on the bab\_type. Cae decoding relies on the knowledge of intra\_prob[] and inter\_prob[], probability tables given in annex B.

#### 6.3.5.4 Sprite coding

**warping\_mv\_code(dmv)** : The codeword for each differential motion vector consists of a VLC indicating the length of the dmv code (dmv\_length) and a FLC, dmv\_code-, with dmv\_length bits. The codewords are listed in Table B-33.

**brightness\_change\_factor ()**: The codeword for brightness\_change\_factor consists of a variable length code denoting brightness\_change\_factor\_size and a fix length code, brightness\_change\_factor, of brightness\_change\_factor\_size bits (sign bit included). The codewords are listed in Table B-34.

**send\_mb()**: This function returns 1 if the current macroblock has already been sent previously and "not coded". Otherwise it returns 0.

**piece\_quant**: This is a 5-bit unsigned integer which indicates the quant to be used for a sprite-piece until updated by a subsequent dquant. The piece\_quant carries the binary representation of quantizer values from 1 to 31 in steps of 1.

**piece\_width**: This value specifies the width of the sprite piece measured in macroblock units.

**piece\_height**: This value specifies the height of the sprite piece measured in macroblock units.

**piece\_xoffset**: This value specifies the horizontal offset location, measured in macroblock units from the left edge of the sprite object, for the placement of the sprite piece into the sprite object buffer at the decoder.

**piece\_yoffset**: This value specifies the vertical offset location, measured in macroblock units from the top edge of the sprite object.

**decode\_sprite\_piece ()**: It decodes a selected region of the sprite object or its update. It also decodes the parameters required by the decoder to properly incorporate the pieces. All the static-sprite-object pieces will be

encoded using a subset of the I-VOP syntax. And the static-sprite-update pieces use a subset of the P-VOP syntax. The sprite update is defined as the difference between the original sprite texture and the reconstructed sprite assembled from all the sprite object pieces.

**sprite\_shape\_texture()**: For the static-sprite-object pieces, shape and texture are coded using the macroblock layer structure in I-VOPs. And the static-sprite-update pieces use the P-VOP inter-macroblock syntax -- except that there are no motion vectors and shape information included in this syntax structure. Macroblocks raster scanning is employed to encode a sprite piece; however, whenever the scan encounters a macroblock which has been part of some previously sent sprite piece, then the block is not coded and the corresponding macroblock layer is empty.

### 6.3.6 Macroblock related

**not\_coded**: This is a 1-bit flag which signals if a macroblock is coded or not. When set to '1' it indicates that a macroblock is not coded and no further data is included in the bitstream for this macroblock; decoder shall treat this macroblock as 'inter' with motion vector equal to zero and no DCT coefficient data. When set to '0' it indicates that the macroblock is coded and its data is included in the bitstream.

**mcbsc**: This is a variable length code that is used to derive the macroblock type and the coded block pattern for chrominance. It is always included for coded macroblocks. Table B-6 and Table B-7 list all allowed codes for mcbpc in I- and P-VOPs respectively. The values of the column "MB type" in these tables are used as the variable "derived\_mb\_type" which is used in the respective syntax part for motion and texture decoding. In P-vops using the short video header format (i.e., when short\_video\_header is 1), mcbpc codes indicating macroblock type 2 shall not be used.

**ac\_pred\_flag**: This is a 1-bit flag which when set to '1' indicates that either the first row or the first column of ac coefficients are differentially coded for intra coded macroblocks.

**cbp**: This variable length code represents a pattern of non-transparent luminance blocks with at least one non intra DC transform coefficient, in a macroblock. Table B-8 – Table B-11 indicate the codes and the corresponding patterns they indicate for the respective cases of intra- and inter-MBs.

**dquant**: This is a 2-bit code which specifies the change in the quantizer, quant, for I- and P-VOPs. Table 6-27 lists the codes and the differential values they represent. The value of quant lies in range of 1 to  $2^{\text{quant\_precision}} - 1$ ; if the value of quant after adding dquant value is less than 1 or exceeds  $2^{\text{quant\_precision}} - 1$ , it shall be correspondingly clipped to 1 and  $2^{\text{quant\_precision}} - 1$ . If quant\_precision takes its default value of 5, the range of allowed values for quant is [1:31].

Table 6-27 -- dquant codes and corresponding values

dquant code	value
00	-1
01	-2
10	1
11	2

**co\_located\_not\_coded**: The value of this internal flag is set to 1 when the current VOP is a B-VOP, the future reference VOP is a P-VOP, and the co-located macroblock in the future reference VOP is skipped (i.e. coded as not\_coded = '1'). Otherwise the value of this flag is set to 0. The co-located macroblock is the macroblock which has the same horizontal and vertical index with the current macroblock in the B-VOP. If the co-located macroblock lies outside of the bounding rectangle, this macroblock is considered to be not skipped.

**modb**: This is a variable length code present only in coded macroblocks of B-VOPs. It indicates whether mb\_type and/or cbpb information is present for a macroblock. The codes for modb are listed in Table B-3.

**mb\_type**: This variable length code is present only in coded macroblocks of B-VOPs. Further, it is present only in those macroblocks for which one motion vector is included. The codes for mb\_type are shown in Table B-4 for B-VOPs for no scalability and in Table B-5 for B-VOPs with scalability. When mb\_type is not present (i.e. modb==1) for a macroblock in a B-VOP, the macroblock type is set to the default type. The default macroblock type for the

enhancement layer of spatially scalable bitstreams (i.e. `ref_select_code == '00' && scalability = '1'`) is "forward mc + Q". Otherwise, the default macroblock type is "direct".

**cbpb**: This is a 3 to 6 bit code representing coded block pattern in B-VOPs, if indicated by `modb`. Each bit in the code represents a coded/no coded status of a block; the leftmost bit corresponds to the top left block in the macroblock. For each non-transparent blocks with coefficients, the corresponding bit in the code is set to '1'. When `cbpb` is not present (i.e. `modb=='1'` or `'01'`) for a macroblock in a B-VOP, no coefficients are coded for all the non-transparent blocks in this macroblock.

**dbquant**: This is a variable length code which specifies the change in quantizer for B-VOPs. Table 6-28 lists the codes and the differential values they represent. If the value of quant after adding `dbquant` value is less than 1 or exceeds  $2^{\text{quant\_precision}}-1$ , it shall be correspondingly clipped to 1 and  $2^{\text{quant\_precision}}-1$ . If `quant_precision` takes its default value of 5, the range of allowed values for the quantizer for B-VOPs is [1:31].

**Table 6-28 -- dbquant codes and corresponding values**

dbquant code	value
10	-2
0	0
11	2

**coda\_i**: This is a one-bit flag which is set to "1" to indicate that all the values in the grayscale alpha macroblock are equal to 255 (`AlphaOpaqueValue`). When set to "0", this flag indicates that one or more 8x8 blocks are coded according to `cbpa`.

**ac\_pred\_flag\_alpha**: This is a one-bit flag which when set to '1' indicates that either the first row or the first column of ac coefficients are to be differentially decoded for intra alpha macroblocks. It has the same effect for alpha as the corresponding luminance flag.

**cbpa**: This is the coded block pattern for grayscale alpha texture data. For I, P and B VOPs, this VLC is exactly the same as the INTER (P) `cbpy` VLC described in Table B-8 – Table B-11. `cbpa` is followed by the alpha block data which is coded in the same way as texture block data. Note that grayscale alpha blocks with alpha all equal to zero (transparent) are not included in the bitstream.

**coda\_pb**: This is a VLC indicating the coding status for P or B alpha macroblocks. The semantics are given in the table below (Table 6-29). When this VLC indicates that the alpha macroblock is all opaque, this means that all values are set to 255 (`AlphaOpaqueValue`).

**Table 6-29 -- coda\_pb codes and corresponding values**

coda_pb	Meaning
1	alpha residue all zero
01	alpha macroblock all opaque
00	alpha residue coded

### 6.3.6.1 MB Binary Shape Coding

**bab\_type**: This defines the coding type of the current bab according to Table B-27 and Table B-28 for intra and inter mode, respectively.

**mvds\_x**: This defines the size of the x-component of the differential motion vector for the current bab according to Table B-29.

**mvds\_y**: This defines the size of the y-component of the differential motion vector for the current bab according to Table B-29 if mvds\_x!=0 and according to Table B-30 if mvds\_x==0.

**conv\_ratio**: This defines the upsampling factor according to Table B-31 to be applied after decoding the current shape information

**scan\_type**: This defines according to Table 6-30 whether the current bordered to be decoded bab and the eventual bordered motion compensated bab need to be transposed

Table 6-30 -- scan\_type

scan_type	meaning
0	transpose bab as in matrix transpose
1	do not transpose

**binary\_arithmetic\_code()** –This is a binary arithmetic decoder that defines the context dependent arithmetically to be decoded binary shape information. The meaning of the bits is defined by the arithmetic decoder according to subclause 7.5.3

### 6.3.6.2 Motion vector

**horizontal\_mv\_data**: This is a variable length code, as defined in Table B-12, which is used in motion vector decoding as described in subclause 7.6.3.

**vertical\_mv\_data**: This is a variable length code, as defined in Table B-12, which is used in motion vector decoding as described in subclause 7.6.3.

**horizontal\_mv\_residual**: This is an unsigned integer which is used in motion vector decoding as described in subclause 7.6.3. The number of bits in the bitstream for horizontal\_mv\_residual, r\_size, is derived from either vop\_fcode\_forward or vop\_fcode\_backward as follows;

$$r\_size = \text{vop\_fcode\_forward} - 1 \text{ or } r\_size = \text{vop\_fcode\_backward} - 1$$

**vertical\_mv\_residual**: This is an unsigned integer which is used in motion vector decoding as described in subclause 7.6.3. The number of bits in the bitstream for vertical\_mv\_residual, r\_size, is derived from either vop\_fcode\_forward or vop\_fcode\_backward as follows;

$$r\_size = \text{vop\_fcode\_forward} - 1 \text{ or } r\_size = \text{vop\_fcode\_backward} - 1$$

### 6.3.6.3 Interlaced Information

**dct\_type**: This is a 1-bit flag indicating whether the macroblock is frame DCT coded or field DCT coded. If this flag is set to '1', the macroblock is field DCT coded; otherwise, the macroblock is frame DCT coded. This flag is only present in the bitstream if the interlaced flag is set to '1' and the macroblock is coded (coded blk pattern is non-zero) or intra-coded. Boundary blocks are always coded in frame-based mode.

**field\_prediction**: This is a 1-bit flag indicating whether the macroblock is field predicted or frame predicted. This flag is set to '1' when the macroblock is predicted using field motion vectors. If it is set to '0' then frame prediction (16x16 or 8x8) will be used. This flag is only present in the bitstream if the interlaced flag is set to "1" and the derived\_mb\_type is "0" or "1" in the P-VOP or an non-direct mode macroblock in the B-VOP.

**forward\_top\_field\_reference**: This is a 1-bit flag which indicates the reference field for the forward motion compensation of the top field. When this flag is set to '0', the top field is used as the reference field. If it is set to '1' then the bottom field will be used as the reference field. This flag is only present in the bitstream if the field\_prediction flag is set to "1" and the macroblock is not backward predicted.

**forward\_bottom\_field\_reference**: This is a 1-bit flag which indicates the reference field for the forward motion compensation of the bottom field. When this flag is set to '0', the top field is used as the reference field. If it is set to

'1' then the bottom field will be used as the reference field. This flag is only present in the bitstream if the field\_prediction flag is set to "1" and the macroblock is not backward predicted.

**backward\_top\_field\_reference:** This is a 1-bit flag which indicates the reference field for the backward motion compensation of the top field. When this flag is set to '0', the top field is used as the reference field. If it is set to '1' then the bottom field will be used as the reference field. This flag is only present in the bitstream if the field\_prediction flag is set to "1" and the macroblock is not forward predicted.

**backward\_bottom\_field\_reference:** This is a 1-bit flag which indicates the reference field for the backward motion compensation of the bottom field. When this flag is set to '0', the top field is used as the reference field. If it is set to '1' then the bottom field will be used as the reference field.. This flag is only present in the bitstream if the field\_prediction flag is set to "1" and the macroblock is not forward predicted.

### 6.3.7 Block related

**intra\_dc\_coefficient:** This is a fixed length code that defines the value of an intra DC coefficient when the short video header format is in use (i.e., when short\_video\_header is "1"). It is transmitted as a fixed length unsigned integer code of size 8 bits, unless this integer has the value 255. The values 0 and 128 shall not be used – they are reserved. If the integer value is 255, this is interpreted as a signalled value of 128. The integer value is then multiplied by a dc\_scaler value of 8 to produce the reconstructed intra DC coefficient value.

**dct\_dc\_size\_luminance:** This is a variable length code as defined in Table B-13 that is used to derive the value of the differential dc coefficients of luminance values in blocks in intra macroblocks. This value categorizes the coefficients according to their size.

**dct\_dc\_differential:** This is a variable length code as defined in Table B-15 that is used to derive the value of the differential dc coefficients in blocks in intra macroblocks. After identifying the category of the dc coefficient in size from dct\_dc\_size\_luminance or dct\_dc\_size\_chrominance, this value denotes which actual difference in that category occurred.

**dct\_dc\_size\_chrominance:** This is a variable length code as defined in Table B-14 that is used to derive the value of the differential dc coefficients of chrominance values in blocks in intra macroblocks. This value categorizes the coefficients according to their size.

**pattern\_code[i]:** The value of this internal flag is set to 1 if the block or alpha block with the index value i includes one or more DCT coefficients that are decoded using at least one of Table B-16 to Table B-25. Otherwise the value of this flag is set to 0.

#### 6.3.7.1 Alpha block related

**dct\_dc\_size\_alpha:** This is a variable length code for coding the alpha block dc coefficient. Its semantics are the same as dct\_dc\_size\_luminance in subclause 6.3.7.

### 6.3.8 Still texture object

**still\_texture\_object\_start\_code:** The still\_texture\_object\_start\_code is a string of 32 bits. The first 24 bits are '0000 0000 0000 0000 0000 0001' and the last 8 bits are defined in Table 6-3.

**texture\_object\_id:** This is given by 16-bits representing one of the values in the range of '0000 0000 0000 0000' to '1111 1111 1111 1111' in binary. The texture\_object\_layer\_id uniquely identifies a texture object layer.

**wavelet\_filter\_type:** This field indicates the arithmetic precision which is used for the wavelet decomposition as the following:

Table 6-31 -- Wavelet type

wavelet_filter_type	Meaning
0	integer
1	Double float

**wavelet\_download:** This field indicates if the 2-band filter bank is specified in the bitstream:

**Table 6-32 -- Wavelet downloading flag**

wavelet_download	meaning
0	default filters
1	specified in bitstream

The default filter banks are described in subclause B.2.2.

**wavelet\_decomposition\_levels:** This field indicates the number of levels in the wavelet decomposition of the texture.

**scan\_direction:** This field indicates the scan order of AC coefficients. In single-quant and multi-quant mode, if this flag is `0', then the coefficients are scanned in the tree-depth fashion. If it is `1', then they are scanned in the subband by subband fashion. In bilevel\_quant mode, if the flag is `0', then they are scanned in bitplane by bitplane fashion. Within each bitplane, they are scanned in a subband by subband fashion. If it is "1", they are scanned from the low wavelet decomposition layer to high wavelet decomposition layer. Within each wavelet decomposition layer, they are scanned from most significant bitplane down to the least significant bitplane.

**start\_code\_enable:** If this flag is enabled ( disable =0; enabled = 1), the start code followed by an ID to be inserted in to each spatial scalability layer and/or each SNR scalability layer.

**texture\_object\_layer\_shape:** This is a 2-bit integer defined in Table 6-33. It identifies the shape type of a texture object layer.

**Table 6-33 -- Texture Object Layer Shape type**

texture_object_layer_shape	Meaning
00	rectangular
01	binary
10	reserved
11	reserved

**quantization\_type:** This field indicates the type of quantization as shown in Table 6-34.

**Table 6-34 -- The quantization type**

quantization_type	Code
single quantizer	01
multi quantizer	10
bi-level quantizer	11

**spatial\_scalability\_levels:** This field indicates the number of spatial scalability layers supported in the bitstream. This number can be from 1 to wavelet\_decomposition\_levels.

**use\_default\_spatial\_scalability:** This field indicates how the spatial scalability levels are formed. If its value is one, then default spatial scalability is used, starting from  $(\frac{1}{4})^{(\text{spatial\_scalability\_levels}-1)}$ -th of the full resolution up to the full resolution, where  $\wedge$  is a power operation. If its value is zero, the spatial scalability is specified by wavelet\_layer\_index described below.

**wavelet\_layer\_index:** This field indicates the identification number of wavelet\_decomposition layer used for spatial scalability. The index starts with 0 (i.e., root\_band) and ends at (wavelet\_decomposition\_levels-1) (i.e., full resolution).

**uniform\_wavelet\_filter:** If this field is “1”, then the same wavelet filter is applied for all wavelet layers. If this field is “0”, then different wavelet filters may be applied for the wavelet decomposition. Note that the same filters are used for both luminance and chromanence. Since the chromanence’s width and height is half that of the luminance, the last wavelet filter applied to the luminance is skipped when the chromanence is synthesized.

**wavelet\_stuffing:** These 3 stuffing bits are reserved for future expansion. It is currently defined to be ‘111’.

**texture\_object\_layer\_width:** The texture\_object\_layer\_width is a 15-bit unsigned integer representing the width of the displayable part of the luminance component in pixel units. A zero value is forbidden.

**texture\_object\_layer\_height:** The texture\_object\_layer\_height is a 15-bit unsigned integer representing the height of the displayable part of the luminance component in pixel units. A zero value is forbidden.

**horizontal\_ref:** This is a 15-bit integer which specifies, in pixel units, the horizontal position of the top left of the rectangle defined by horizontal size of object\_width. The value of horizontal\_ref shall be divisible by two. This is used for decoding and for picture composition.

**vertical\_ref:** This is a 15-bit integer which specifies, in pixel units, the vertical position of the top left of the rectangle defined by vertical size of object\_height. The value of vertical\_ref shall be divisible by two. This is used for decoding and for picture composition.

**object\_width:** This is a 15-bit unsigned integer which specifies the horizontal size, in pixel units, of the rectangle that includes the object. A zero value is forbidden.

**object\_height:** This is a 15-bit unsigned integer which specifies the vertical size, in pixel units, of the rectangle that includes the object. A zero value is forbidden.

**quant\_byte:** This field defines one byte of the quantization step size for each scalability layer. A zero value is forbidden. The quantization step size parameter, quant, is decoded using the function get\_param( ): quant = get\_param( 7 );

**max\_bitplanes:** This field indicates the number of maximum bitplanes in bilevel\_quant mode.

### 6.3.8.1 Texture Layer Decoding

**tree\_blocks:** The tree block is that wavelet coefficients are organized in a tree structure which is rooted in the low-low band (DC band) of the wavelet decomposition, then extends into the higher frequency bands at the same spatial location. Note the DC band is encoded separately.

**spatial\_layers:** This field is equivalent to the maximum number of the wavelet decomposition layers in that scalability layer.

**arith\_decode\_highbands\_td():** This is an arithmetic decoder for decoding the quantized coefficient values of the higher bands (all bands except DC band) within a single tree block. The bitstream is generated by an adaptive arithmetic encoder. The arithmetic decoding relies on the initialization of the uniform probability distribution models described in subclause B.2.2. This decoder uses only integer arithmetic. It also uses an adaptive probability model based on the frequency counts of the previously decoded symbols. The maximum range (or precision) specified is (2<sup>16</sup>) - 1 (16 bits). The maximum frequency count for the magnitude and residual models is 127, and for all other models it is 127. The arithmetic coder used is identical to the one used in arith\_decode\_highbands\_bilevel\_td().

**texture\_spatial\_layer\_start\_code:** The texture\_spatial\_layer\_start\_code is a string of 32 bits. The 32 bits are ‘0000 0000 0000 0000 0001 1011 1111’ in binary. The texture\_spatial\_layer\_start\_code marks the start of a new spatial layer.

**texture\_spatial\_layer\_id:** This is given by 5-bits representing one of the values in the range of ‘00000’ to ‘11111’ in binary. The texture\_spatial\_layer\_id uniquely identifies a spatial layer.

**arith\_decode\_highbands\_bb()**: This is an arithmetic decoder for decoding the quantized coefficient values of the higher bands (all bands except DC band) within a single band. The bitstream is generated by an adaptive arithmetic encoder. The arithmetic decoding relies on the initialization of the uniform probability distribution models described in subclause B.2.2. This decoder uses arithmetic. It also uses an adaptive probability model based on the frequency counts of the previously decoded symbols. The maximum range (or precision) specified is  $(2^{16}) - 1$  (16 bits). The maximum frequency count for the magnitude and residual models is 127, and for all other models it is 127.

**snr\_scalability\_levels**: This field indicates the number of levels of SNR scalability supported in this spatial scalability level.

**texture\_snr\_layer\_start\_code**: The texture\_snr\_layer\_start\_code is a string of 32 bits. The 32 bits are '0000 0000 0000 0000 0000 0001 1100 0000' in binary. The texture\_snr\_layer\_start\_code marks the start of a new snr layer.

**texture\_snr\_layer\_id**: This is given by 5-bits representing one of the values in the range of '00000' to '11111' in binary. The texture\_snr\_layer\_id uniquely identifies an SNR layer.

NOTE All the start codes start at the byte boundary. Appropriate number of bits is stuffed before any start code to byte-align the bitstream.

**all\_nonzero**: This flag indicates whether some of the subbands of the current layer contain only zero coefficients. The value '0' for this flag indicates that one or more of the subbands contain only zero coefficients. The value '1' for this flag indicates that all the subbands contain some nonzero coefficients

**all\_zero**: This flag indicates whether all the coefficients in the current layer are zero or not. The value '0' for this flag indicates that the layer contains some nonzero coefficients. The value '1' for this flag indicates that the layer only contains zero coefficients, and therefore the layer is skipped.

**lh\_zero, hl\_zero, hh\_zero**: This flag indicates whether the LH/HL/HH subband of the current layer contains only all zero coefficients. The value '1' for this flag indicates that the LH/HL/HH subband contains only zero coefficients, and therefore the subband is skipped. The value '0' for this flag indicates that the LH/HL/HH subband contains some nonzero coefficients

**arith\_decode\_highbands\_bilevel\_bb()**: This is an arithmetic decoder for decoding the quantized coefficient values of the higher bands in the bilevel\_quant mode (all bands except DC band). The bitstream is generated by an adaptive arithmetic encoder. The arithmetic decoding relies on the initialization of the uniform probability distribution models described. The arith\_decode\_highbands\_bilevel() function uses bitplane scanning, and a different probability model as described in subclause B.2.2. In this mode, The maximum range (or precision) specified is  $(2^{16}) - 1$  (16 bits). The maximum frequency count is 127. It uses the lh/hl/hh\_zero flags to see if any of the LH/HL/HH are all zero thus not decoded . For example if lh\_zero=1 and hh\_zero=1 only hl\_zero is decoded.

**arith\_decode\_highbands\_bilevel\_td()**: This is an arithmetic decoder for decoding the quantized coefficient values of the higher bands in the bilevel\_quant mode (all bands except DC band). The bitstream is generated by an adaptive arithmetic encoder. The arithmetic decoding relies on the initialization of the uniform probability distribution models described. The arith\_decode\_highbands\_bilevel() function uses bitplane scanning, and a different probability model as described in subclause B.2.2. In this mode, The maximum range (or precision) specified is  $(2^{16}) - 1$  (16 bits). The maximum frequency count is 127. It uses the lh/hl/hl\_zero flags to see if any of the LH/HL/HH are all zero thus not decoded. For example if lh\_zero=1 and hh\_zero=1 only hl\_zero is decoded.

**lowpass\_filter\_length**: This field defines the length of the low pass filter in binary ranging from "0001" (length of 1) to "1111" (length of 15.)

**highpass\_filter\_length**: This field defines the length of the high pass filter in binary ranging from "0001" (length of 1) to "1111" (length of 15.)

**filter\_tap\_integer**: This field defines an integer filter coefficient in a 16 bit signed integer. The filter coefficients are decoded from the left most tap to the right most tap order.

**filter\_tap\_float\_high**: This field defines the left 16 bits of a floating filter coefficient which is defined in 32-bit IEEE floating format. The filter coefficients are decoded from the left most tap to the right most tap order.

**filter\_tap\_float\_low**: This field defines the right 16 bits of a floating filter coefficient which is defined in 32-bit IEEE floating format. The filter coefficients are decoded from the left most tap to the right most tap order.

**integer\_scale:** This field defines the scaling factor of the integer wavelet, by which the output of each composition level is divided by an integer division operation. A zero value is forbidden.

**mean:** This field indicates the mean value of one color component of the texture.

**quant\_dc\_byte:** This field indicates the quantization step size for one color component of the DC subband. A zero value is forbidden. The quantization step size parameter, quant\_dc, is decoded using the function get\_param( ):  
quant = get\_param( 7 );

**band\_offset\_byte:** This field defines one byte of the absolute value of the parameter band\_offset. This parameter is added to each DC band coefficient obtained by arithmetic decoding. The parameter band\_offset is decoded using the function get\_param( ):

```
band_offset = -get_param( 7 );
```

where function get\_param() is defined as

```
int get_param(int nbit)
{
    int count = 0;
    int word = 0;
    int value = 0;
    int module = 1<<(nbit);

    do{
        word= get_next_word_from_bitstream( nbit+1);
        value += (word & (module-1) ) << (count * nbit);
        count++;
    } while( word>> nbit);

    return value;
}
```

The function get\_next\_word\_from\_bitstream( x ) reads the next x bits from the input bitstream.

**band\_max\_byte:** This field defines one byte of the maximum value of the DC band. The parameter band\_max\_value is decoded using function get\_param( ):

```
band_max_value = get_param( 7 );
```

**arith\_decode\_dc():** This is an arithmetic decoder for decoding the quantized coefficient values of DC band only. No zerotree symbol is decoded since the VAL is assumed for all DC coefficient values. This bitstream is generated by an adaptive arithmetic encoder. The arithmetic decoding relies on the initialization of a uniform probability distribution model described in subclause B.2.2. The arith\_decode\_dc() function uses the same arithmetic decoder as described in arith\_decode\_highbands\_td() but it uses different scanning, and a different probability model (DC).

**root\_max\_alphabet\_byte:** This field defines one byte of the maximum absolute value of the quantized coefficients of the three lowest AC bands. This parameter is decoded using the function get\_param( ):

```
root_max_alphabet = get_param ( 7 );
```

**valz\_max\_alphabet\_byte**-- This field defines one byte of the maximum absolute value of the quantized coefficients of the 3 highest AC bands. The parameter valz\_max is decoded using the function get\_param( ):

```
valz_max_alphabet = get_param ( 7 );
```

**valnz\_max\_alphabet\_byte**: This field defines one byte of the maximum absolute value of the quantized coefficients which belong to the middle AC bands (the bands between the 3 lowest and the 3 highest AC bands). The parameter valnz\_max\_alphabet is decoded using the function get\_param( ):

```
valnz_max_alphabet = get_param ( 7 );
```

### 6.3.8.2 Shape Object decoding

**change\_conv\_ratio\_disable**: This specifies whether conv\_ratio is encoded at the shape object decoding function. If it is set to "1" when disable.

**sto\_constant\_alpha**: This is a 1-bit flag when set to '1', the opaque alpha values of the binary mask are replaced with the alpha value specified by sto\_constant\_alpha\_value.

**sto\_constant\_alpha\_value**: This is an 8-bit code that gives the alpha value to replace the opaque pixels in the binary alpha mask. Value '0' is forbidden.

**bab\_type**: This is a variable length code of 1-2 bits. It indicates the coding mode used for the bab. There are three bab\_types as depicted in Table 6-35. The VLC tables used depend on the decoding context i.e. the bab\_types of blocks already received.

Table 6-35 -- List of bab\_types and usage

bab_type	Semantic	code
2	transparent	10
3	opaque	0
4	intraCAE	11

The bab\_type determines what other information fields will be present for the bab shape. No further shape information is present if the bab\_type = 2 or 3. opaque means that all pixels of the bab are part of the object. transparent means that none of the bab pixels belong to the object. IntraCAE means the intra-mode CAE decoding will be required to reconstruct the pixels of the bab.

**conv\_ratio**: This is VLC code of length 1-2 bits. It specifies the factor used for sub-sampling the 16x16 pixel bab. The decoder must up-sample the decoded bab by this factor. The possible values for this factor are 1, 2 and 4 and the VLC table used is given in Table B-31.

**scan\_type**: This is a 1-bit flag where a value of '0' implies that the bab is in transposed form i.e. the bab has been transposed prior to coding. The decoder must then transpose the bab back to its original form following decoding. If this flag is '1', then no transposition is performed.

**binary\_arithmetic\_decode()**: This is a binary arithmetic decoder representing the pixel values of the bab. Cae decoding relies on the knowledge of intra\_prob[], probability tables given in annex B.

### 6.3.9 Mesh object

**mesh\_object\_start\_code**: The mesh\_object\_start\_code is the bit string '000001BC' in hexadecimal. It initiates a mesh object.

#### 6.3.9.1 Mesh object plane

**mesh\_object\_plane\_start\_code**: The mesh\_object\_plane\_start\_code is the bit string '000001BD' in hexadecimal. It initiates a mesh object plane.

**is\_intra:** This is a 1-bit flag which when set to '1' indicates that the mesh object is coded in intra mode. When set to '0' it indicates that the mesh object is coded in predictive mode.

### 6.3.9.2 Mesh geometry

**mesh\_type\_code:** This is a 2-bit integer defined in Table 6-36. It indicates the type of initial mesh geometry to be decoded.

**Table 6-36 -- Mesh type code**

mesh type code	mesh geometry
00	forbidden
01	uniform
10	Delaunay
11	reserved

**nr\_of\_mesh\_nodes\_hor:** This is a 10-bit unsigned integer specifying the number of nodes in one row of a uniform mesh.

**nr\_of\_mesh\_nodes\_vert:** This is a 10-bit unsigned integer specifying the number of nodes in one column of a uniform mesh.

**mesh\_rect\_size\_hor:** This is a 8-bit unsigned integer specifying the width of a rectangle of a uniform mesh (containing two triangles) in half pixel units.

**mesh\_rect\_size\_vert:** This is a 8-bit unsigned integer specifying the height of a rectangle of a uniform mesh (containing two triangles) in half pixel units.

**triangle\_split\_code:** This is a 2-bit integer defined in Table 6-37. It specifies how rectangles of a uniform mesh are split to form triangles.

**Table 6-37 -- Specification of the triangulation type**

triangle split code	Split
00	top-left to right bottom
01	bottom-left to top right
10	alternately top-left to bottom-right and bottom-left to top-right
11	alternately bottom-left to top-right and top-left to bottom-right

**nr\_of\_mesh\_nodes:** This is a 16-bit unsigned integer defining the total number of nodes (vertices) of a (non-uniform) Delaunay mesh. These nodes include both interior nodes as well as boundary nodes.

**nr\_of\_boundary\_nodes:** This is a 10-bit unsigned integer defining the number of nodes (vertices) on the boundary of a (non-uniform) Delaunay mesh.

**node0\_x:** This is a 13-bit signed integer specifying the x-coordinate of the first boundary node (vertex) of a mesh in half-pixel units with respect to a local coordinate system.

**node0\_y:** This is a 13-bit signed integer specifying the y-coordinate of the first boundary node (vertex) of a mesh in half-pixel units with respect to a local coordinate system.

**delta\_x\_len\_vlc:** This is a variable-length code specifying the length of the delta\_x code that follows. The delta\_x\_len\_vlc and delta\_x codes together specify the difference between the x-coordinates of a node (vertex) and

the previously encoded node (vertex). The definition of the delta\_x\_len\_vlc and delta\_x codes are given in Table B-33, the table for sprite motion trajectory coding.

**delta\_x**: This is an integer that defines the value of the difference between the x-coordinates of a node (vertex) and the previously encoded node (vertex) in half pixel units. The number of bits in the bitstream for delta\_x is delta\_x\_len\_vlc.

**delta\_y\_len\_vlc**: This is a variable-length code specifying the length of the delta\_y code that follows. The delta\_y\_len\_vlc and delta\_y codes together specify the difference between the y-coordinates of a node (vertex) and the previously encoded node (vertex). The definition of the delta\_y\_len\_vlc and delta\_y codes are given in Table B-33, the table for sprite motion trajectory coding.

**delta\_y**: This is an integer that defines the value of the difference between the y-coordinates of a node (vertex) and the previously encoded node (vertex) in half pixel units. The number of bits in the bitstream for delta\_y is delta\_y\_len\_vlc.

### 6.3.9.3 Mesh motion

**motion\_range\_code**: This is a 3-bit integer defined in Table 6-38. It specifies the dynamic range of motion vectors in half pel units.

Table 6-38 -- motion range code

motion range code	motion vector range
1	[-32, 31]
2	[-64, 63]
3	[-128, 127]
4	[-256, 255]
5	[-512, 511]
6	[-1024, 1023]
7	[-2048, 2047]

**node\_motion\_vector\_flag**: This is a 1 bit code specifying whether a node has a zero motion vector. When set to '1' it indicates that a node has a zero motion vector, in which case the motion vector is not encoded. When set to '0', it indicates the node has a nonzero motion vector and that motion vector data shall follow.

**delta\_mv\_x\_vlc**: This is a variable-length code defining (together with delta\_mv\_x\_res) the value of the difference in the x-component of the motion vector of a node compared to the x-component of a predicting motion vector. The definition of the delta\_mv\_x\_vlc codes are given in Table B-12, the table for motion vector coding (MVD). The value delta\_mv\_x\_vlc is given in half pixel units.

**delta\_mv\_x\_res**: This is an integer which is used in mesh node motion vector decoding using an algorithm equivalent to that described in the section on video motion vector decoding, subclause 7.6.3. The number of bits in the bitstream for delta\_mv\_x\_res is motion\_range\_code-1.

**delta\_mv\_y\_vlc**: This is a variable-length code defining (together with delta\_mv\_y\_res) the value of the difference in the y-component of the motion vector of a node compared to the y-component of a predicting motion vector. The definition of the delta\_mv\_y\_vlc codes are given in Table B-12, the table for motion vector coding (MVD). The value delta\_mv\_y\_vlc is given in half pixel units.

**delta\_mv\_y\_res**: This is an integer which is used in mesh node motion vector decoding using an algorithm equivalent to that described in the section on video motion vector decoding, subclause 7.6.3. The number of bits in the bitstream for delta\_mv\_y\_res is motion\_range\_code-1.

### 6.3.10 Face object

**fba\_object\_start\_code:** The fba\_object\_start\_code is the bit string '000001BA' in hexadecimal. It initiates a face object.

**fba\_object\_coding\_type:** This is a 1-bit integer indicating which coding method is used. Its meaning is described in Table 6-39.

**Table 6-39 -- fba\_object\_coding\_type**

type value	Meaning
0	predictive coding
1	DCT (face_object_plane_group)

**fba\_suggested\_gender:** This is a 1-bit integer indicating the suggested gender for the face model. It does not bind the decoder to display a facial model of suggested gender, but indicates that the content would be more suitable for display with the facial model of indicated gender, if the decoder can provide one. If fba\_suggested\_gender is 1, the suggested gender is male, otherwise it is female.

#### 6.3.10.1 Face object plane

**face\_paramset\_mask:** This is a 2-bit integer defined in Table 6-40. It indicates whether FAP data are present in the face\_frame.

**Table 6-40 -- Face parameter set mask**

mask value	Meaning
00	unused
01	FAP present
10	reserved
11	reserved

**face\_object\_plane\_start\_code:** The face\_frame\_start\_code is the bit string '000001BB' in hexadecimal. It initiates a face object plane.

**is\_frame\_rate:** This is a 1-bit flag which when set to '1' indicates that frame rate information follows this bit field. When set to '0' no frame rate information follows this bit field.

**is\_time\_code:** This is a 1-bit flag which when set to '1' indicates that time code information follows this bit field. When set to '0' no time code information follows this bit field.

**time\_code:** This is a 18-bit integer containing the following: time\_code\_hours, time\_code\_minutes, marker\_bit and time\_code\_seconds as shown in Table 6-41. The parameters correspond to those defined in the IEC standard publication 461 for "time and control codes for video tape recorders". The time code specifies the modulo part (i.e. the full second units) of the time base for the current object plane.

**Table 6-41 -- Meaning of time\_code**

time_code	range of value	No. of bits	Mnemonic
time_code_hours	0 - 23	5	uimsbf
time_code_minutes	0 - 59	6	uimsbf

marker_bit	1	1	bslbf
time_code_seconds	0 - 59	6	uimsbf

**skip\_frames**: This is a 1-bit flag which when set to '1' indicates that information follows this bit field that indicates the number of skipped frames. When set to '0' no such information follows this bit field.

**fap\_mask\_type**: This is a 2-bit integer. It indicates if the group mask will be present for the specified fap group, or if the complete faps will be present; its meaning is described in Table 6-42. In the case the type is '10' the '0' bit in the group mask indicates interpolate fap.

Table 6-42 -- fap mask type

mask type	Meaning
00	no mask nor fap
01	group mask
10	group mask'
11	fap

**fap\_group\_mask[group\_number]**: This is a variable length bit entity that indicates, for a particular group\_number which fap is represented in the bitstream. The value is interpreted as a mask of 1-bit fields. A 1-bit field in the mask that is set to '1' indicates that the corresponding fap is present in the bitstream. When that 1-bit field is set to '0' it indicates that the fap is not present in the bitstream. The number of bits used for the fap\_group\_mask depends on the group\_number, and is given in Table 6-43.

Table 6-43 -- fap group mask bits

group_number	No. of bits
1	2
2	16
3	12
4	8
5	4
6	5
7	3
8	10
9	4
10	4

**NFAP[group\_number]** : This indicates the number of FAPs in each FAP group. Its values are specified in the following table:

Table 6-44 -- NFAP definition

group_number	NFAP[group_number]
1	2
2	16

3	12
4	8
5	4
6	5
7	3
8	10
9	4
10	4

**fap\_quant**: This is a 5-bit unsigned integer which is the quantization scale factor used to compute the FAPi table step size.

**is\_i\_new\_max**: This is a 1-bit flag which when set to '1' indicates that a new set of maximum range values for I frame follows these 4, 1-bit fields.

**is\_i\_new\_min**: This is a 1-bit flag which when set to '1' indicates that a new set of minimum range values for I frame follows these 4, 1-bit fields.

**is\_p\_new\_max**: This is a 1-bit flag which when set to '1' indicates that a new set of maximum range values for P frame follows these 4, 1-bit fields.

**is\_p\_new\_min**: This is a 1-bit flag which when set to '1' indicates that a new set of minimum range values for P frame follows these 4, 1-bit fields.

### 6.3.10.2 Face Object Prediction

**skip\_frames**: This is a 1-bit flag which when set to '1' indicates that information follows this bit field that indicates the number of skipped frames. When set to '0' no such information follows this bit field.

### 6.3.10.3 Decode frame rate and frame skip

**frame\_rate**: This is an 8 bit unsigned integer indicating the reference frame rate of the sequence.

**seconds**: This is a 4 bit unsigned integer indicating the fractional reference frame rate. The frame rate is computed as follows frame rate = (frame\_rate + seconds/16).

**frequency\_offset**: This is a 1-bit flag which when set to '1' indicates that the frame rate uses the NTSC frequency offset of 1000/1001. This bit would typically be set when frame\_rate = 24, 30 or 60, in which case the resulting frame rate would be 23.97, 29.94 or 59.97 respectively. When set to '0' no frequency offset is present. I.e. if (frequency\_offset == 1) frame rate = (1000/1001) \* (frame\_rate + seconds/16).

**number\_of\_frames\_to\_skip**: This is a 4-bit unsigned integer indicating the number of frames skipped. If the number\_of\_frames\_to\_skip is equal to 15 (pattern "1111") then another 4-bit word follows allowing to skip up to 29 frames(pattern "11111110"). If the 8-bits pattern equals "11111111", then another 4-bits word will follow and so on, and the number of frames skipped is incremented by 30. Each 4-bit pattern of '1111' increments the total number of frames to skip with 15.

### 6.3.10.4 Decode new minmax

**i\_new\_max[j]**: This is a 5-bit unsigned integer used to scale the maximum value of the arithmetic decoder used in the I frame.

**i\_new\_min[j]**: This is a 5-bit unsigned integer used to scale the minimum value of the arithmetic decoder used in the I frame.

**p\_new\_max[j]:** This is a 5-bit unsigned integer used to scale the maximum value of the arithmetic decoder used in the P frame.

**p\_new\_min[j]:** This is a 5-bit unsigned integer used to scale the minimum value of the arithmetic decoder used in the P frame.

#### 6.3.10.5 Decode viseme and expression

**viseme\_def:** This is a 1-bit flag which when set to '1' indicates that the mouth FAPs sent with the viseme FAP may be stored in the decoder to help with FAP interpolation in the future.

**expression\_def:** This is a 1-bit flag which when set to '1' indicates that the FAPs sent with the expression FAP may be stored in the decoder to help with FAP interpolation in the future.

#### 6.3.10.6 Face object plane group

**face\_object\_plane\_start\_code:** Defined in subclause 6.3.10.1.

**is\_intra:** This is a 1-bit flag which when set to '1' indicates that the face object is coded in intra mode. When set to '0' it indicates that the face object is coded in predictive mode.

**face\_paramset\_mask:** Defined in subclause 6.3.10.1.

**is\_frame\_rate:** Defined in subclause 6.3.10.1.

**is\_time\_code:** Defined in subclause 6.3.10.1.

**time\_code:** Defined in subclause 6.3.10.1.

**skip\_frames:** Defined in subclause 6.3.10.1.

**Fap\_quant\_index:** This is a 5-bit unsigned integer used as the index to a fap\_scale table for computing the quantization step size of DCT coefficients. The value of fap\_scale is specified in the following list:

```
fap_scale[0 - 31] = { 1, 1, 2, 3, 5, 7, 8, 10, 12, 15, 18, 21, 25, 30, 35, 42,
50, 60, 72, 87, 105, 128, 156, 191, 234, 288, 355, 439, 543, 674, 836, 1039}
```

**fap\_mask\_type:** Defined in subclause 6.3.10.1.

**fap\_group\_mask[group\_number]:** Defined in subclause 6.3.10.1.

#### 6.3.10.7 Face Object Group Prediction

**skip\_frames:** See the definition in subclause 6.3.10.1.

#### 6.3.10.8 Decode frame rate and frame skip

**frame\_rate:** See the definition in subclause 6.3.10.3.

**frequency\_offset:** See the definition in subclause 6.3.10.3.

**number\_of\_frames\_to\_skip:** See the definition in subclause 6.3.10.3.

#### 6.3.10.9 Decode viseme\_segment and expression\_segment

**viseme\_segment\_select1q[k]:** This is the quantized value of viseme\_select1 at frame k of a viseme FAP segment.

**viseme\_segment\_select2q[k]:** This is the quantized value of viseme\_select2 at frame k of a viseme FAP segment.

**viseme\_segment\_blendq[k]:** This is the quantized value of viseme\_blend at frame k of a viseme FAP segment.

**viseme\_segment\_def[k]:** This is a 1-bit flag which when set to '1' indicates that the mouth FAPs sent with the viseme FAP at frame k of a viseme FAP segment may be stored in the decoder to help with FAP interpolation in the future.

**viseme\_segment\_select1q\_diff[k]:** This is the prediction error of viseme\_select1 at frame k of a viseme FAP segment.

**viseme\_segment\_select2q\_diff[k]:** This is the prediction error of viseme\_select2 at frame k of a viseme FAP segment.

**viseme\_segment\_blendq\_diff[k]:** This is the prediction error of viseme\_blend at frame k of a viseme FAP segment.

**expression\_segment\_select1q[k]:** This is the quantized value of expression\_select1 at frame k of an expression FAP segment.

**expression\_segment\_select2q[k]:** This is the quantized value of expression\_select2 at frame k of an expression FAP segment.

**expression\_segment\_intensity1q[k]:** This is the quantized value of expression\_intensity1 at frame k of an expression FAP segment

**expression\_segment\_intensity2q[k]:** This is the quantized value of expression\_intensity2 at frame k of an expression FAP segment

**expression\_segment\_select1q\_diff[k]:** This is the prediction error of expression\_select1 at frame k of an expression FAP segment.

**expression\_segment\_select2q\_diff[k]:** This is the prediction error of expression\_select2 at frame k of an expression FAP segment.

**expression\_segment\_intensity1q\_diff[k]:** This is the prediction error of expression\_intensity1 at frame k of an expression FAP segment.

**expression\_segment\_intensity2q\_diff[k]:** This is the prediction error of expression\_intensity2 at frame k of an expression FAP segment.

**expression\_segment\_init\_face[k]:** This is a 1-bit flag which indicates the value of init\_face at frame k of an expression FAP segment.

**expression\_segment\_def[k]:** This is a 1-bit flag which when set to '1' indicates that the FAPs sent with the expression FAP at frame k of a viseme FAP segment may be stored in the decoder to help with FAP interpolation in the future.

### 6.3.10.10 Decode i\_dc, p\_dc, and ac

**dc\_q:** This is the quantized DC component of the DCT coefficients. For an intra FAP segment, this component is coded as a signed integer of either 16 bits or 31 bits. The DCT quantization parameters of the 68 FAPs are specified in the following list:

DCTQP[1 - 68] = {1, 1, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 15, 15, 15, 15, 15, 15, 15, 5, 10, 10, 10, 10, 425, 425, 425, 425, 425, 5, 5, 5, 5, 5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 20, 20, 20, 20, 10, 10, 10, 10, 255, 170, 255, 255, 255, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 7.5, 15, 15, 15, 15, 10, 10, 10, 10}

For DC coefficients, the quantization stepsize is obtained as follows:

$$\text{qstep}[i] = \text{fap\_scale}[\text{fap\_quant\_inex}] * \text{DCTQP}[i] \div 3.0$$

**dc\_q\_diff:** This is the quantized prediction error of a DC coefficient of an inter FAP segment. Its value is computed by subtracting the decoded DC coefficient of the previous FAP segment from the DC coefficient of the current FAP segment. It is coded by a variable length code if its value is within [-255, +255]. Outside this range, its value is coded by a signed integer of 16 or 32 bits.

**count\_of\_runs:** This is the run length of zeros preceding a non-zero AC coefficient.

**ac\_q[i][next]:** This is a quantized AC coefficients of a segment of FAPi. For AC coefficients, the quantization stepsize is three times larger than the DC quantization stepsize and is obtained as follows:

$$\text{qstep}[i] = \text{fap\_scale}[\text{fap\_quant\_inex}] * \text{DCTQP}[i]$$

## 7 The visual decoding process

This clause specifies the decoding process that the decoder shall perform to recover visual data from the coded bitstream. As shown in Figure 7-1, the visual decoding process includes several decoding processes such as shape-motion-texture decoding, still texture decoding, mesh decoding, and face decoding processes. After decoding the coded bitstream, it is then sent to the compositor to integrate various visual objects.

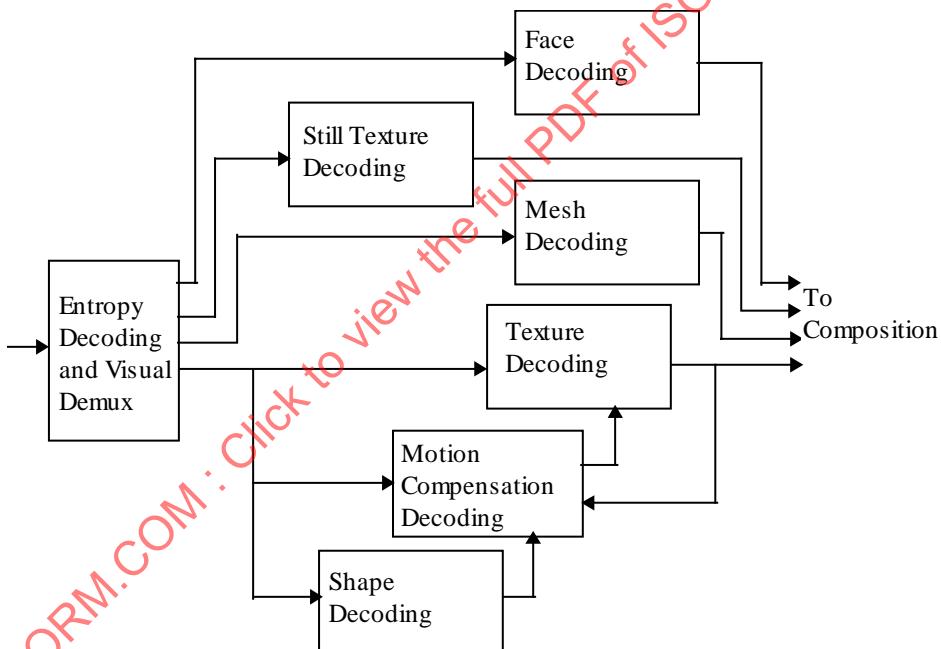


Figure 7-1 -- A high level view of basic visual decoding; specialized decoding such as scalable, sprite and error resilient decoding are not shown

In subclauses 7.1 through 7.9 the VOP decoding process is specified in which shape, motion, texture decoding processes are the major contents. The still texture object decoding is described in subclauses 7.10. Subclause 7.11 includes the mesh decoding process, and subclause 7.12 features the face object decoding process. The output of the decoding process is explained in subclause 7.13.

### 7.1 Video decoding process

This subclause specifies the decoding process that a decoder shall perform to recover VOP data from the coded video bitstream.

With the exception of the Inverse Discrete Cosine Transform (IDCT) the decoding process is defined such that all decoders shall produce numerically identical results. Any decoding process that produces identical results to the process described here, by definition, complies with this part of ISO/IEC 14496.

The IDCT is defined statistically such that different implementations for this function are allowed. The IDCT specification is given in annex A.

Figure 7-2 is a diagram of the Video Decoding Process without any scalability feature. The diagram is simplified for clarity. The same decoding scheme is applied when decoding all the VOPs of a given session.

NOTE Throughout this part of ISO/IEC 14496 two dimensional arrays are represented as *name*[q][p] where 'q' is the index in the vertical dimension and 'p' the index in the horizontal dimension.

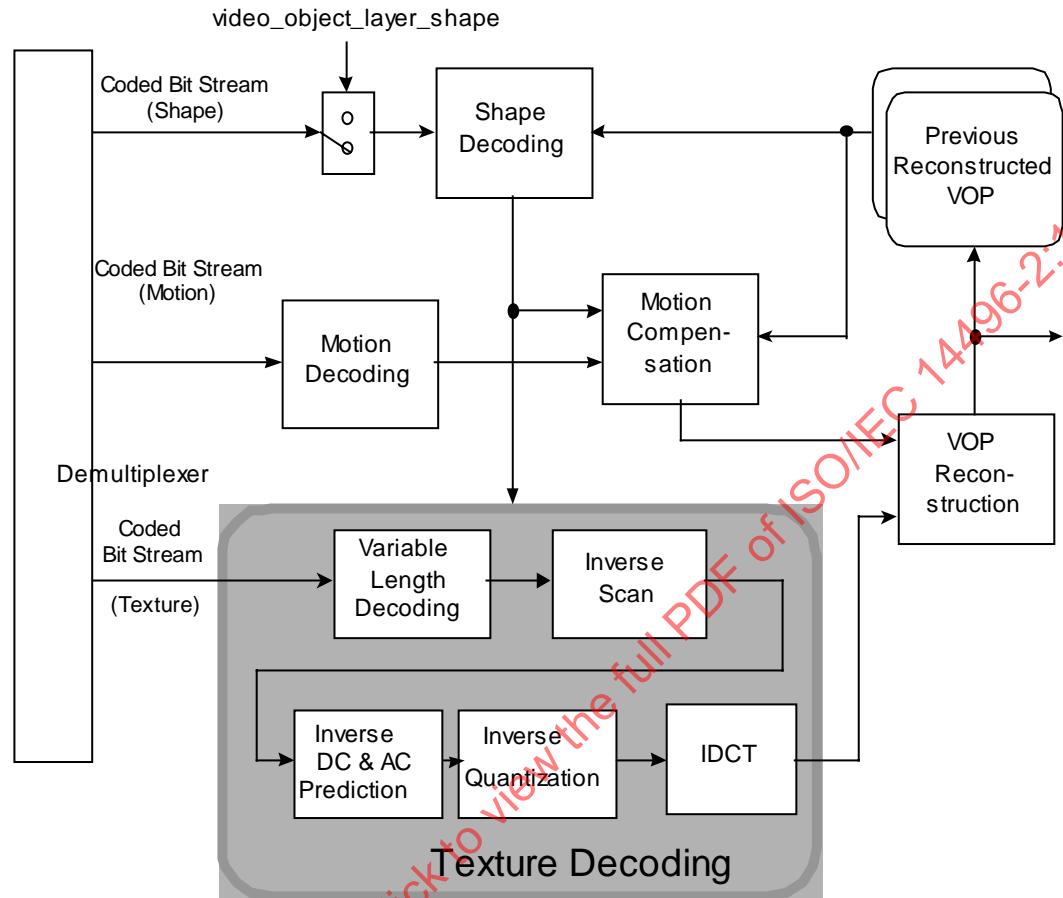


Figure 7-2 -- Simplified Video Decoding Process

The decoder is mainly composed of three parts: shape decoder, motion decoder and texture decoder. The reconstructed VOP is obtained by combining the decoded shape, texture and motion information.

## 7.2 Higher syntactic structures

The various parameters and flags in the bitstream for `VideoObjectLayer()`, `Group_of_VideoObjectPlane()`, `VideoObjectPlane()`, `video_plane_with_short_header()`, `macroblock()` and `block()`, as well as other syntactic structures related to them shall be interpreted as discussed earlier. Many of these parameters and flags affect the decoding process. Once all the macroblocks in a given VOP have been processed, the entire VOP will have been reconstructed. In case the bitstream being decoded contains B-VOPs, reordering of VOPs may be needed as discussed in subclause 6.1.3.7.

## 7.3 VOP reconstruction

The luminance and chrominance values of a VOP from the decoded texture and motion information are reconstructed as follows:

1. In case of INTRA macroblocks, the luminance and chrominance values  $f[y][x]$  from the decoded texture data form the luminance and chrominance values of the VOP:  $d[y][x] = f[y][x]$ .

2. In case of INTER macroblocks, first the prediction values  $p[y][x]$  are calculated using the decoded motion vector information and the texture information of the respective reference VOPs. Then, the decoded texture data  $f[y][x]$  is added to the prediction values, resulting in the final luminance and chrominance values of the VOP:  $d[y][x] = p[y][x] + f[y][x]$

3. Finally, the calculated luminance and chrominance values of the reconstructed VOP are saturated so that

$$0 \leq d[y][x] \leq 2^{\text{bits\_per\_pixel}} - 1, \text{ for all } x, y.$$

## 7.4 Texture decoding

This subclause describes the process used to decode the texture information of a VOP. The process of video texture decoding is given in Figure 7-3.

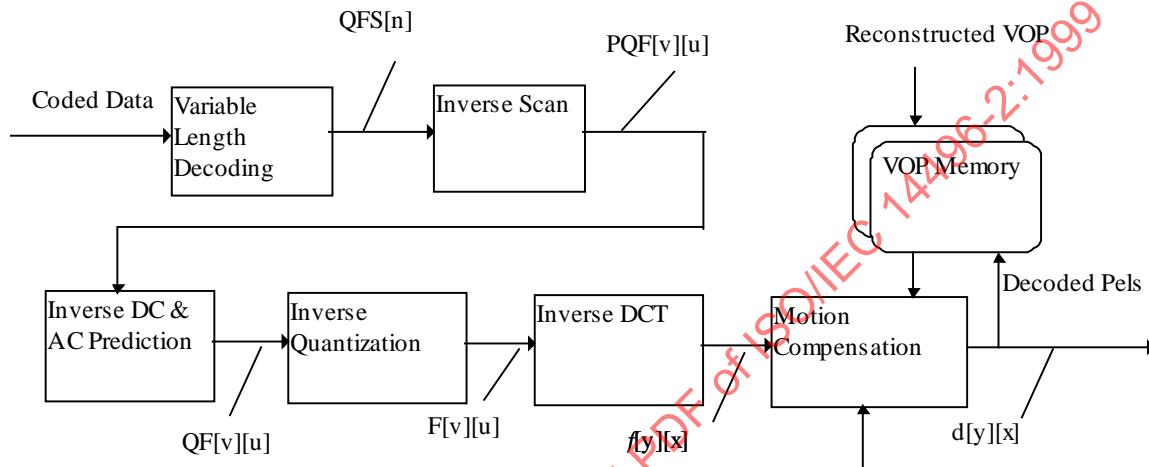


Figure 7-3 -- Video Texture Decoding Process

### 7.4.1 Variable length decoding

This subclause explains the decoding process. Subclause 7.4.1.1 specifies the process used for the DC coefficients ( $n=0$ ) in an intra coded block. ( $n$  is the index of the coefficient in the appropriate zigzag scan order). Subclause 7.4.1.2 specifies the decoding process for all other coefficients; AC coefficients ( $n \neq 0$ ) and DC coefficients in non-intra coded blocks.

#### 7.4.1.1 DC coefficients decoding in intra blocks

Differential DC coefficients in blocks in intra macroblocks are encoded as variable length code denoting `dct_dc_size` as defined in Table B-13 and Table B-14 in annex B, and a fixed length code `dct_dc_differential` (Table B-15). The `dct_dc_size` categorizes the dc coefficients according to their "size". For each category additional bits are appended to the `dct_dc_size` code to uniquely identify which difference in that category actually occurred (Table B-15). This is done by appending a fixed length code, `dct_dc_differential`, of `dct_dc_size` bits. The final value of the decoded dc coefficient is the sum of this differential dc value and the predicted value.

When `short_video_header` is 1, the dc coefficient of an intra block is not coded differentially. It is instead transmitted as a fixed length unsigned integer code of size 8 bits, unless this integer has the value 255. The values 0 and 128 shall not be used – they are reserved. If the integer value is 255, this is interpreted as a signaled value of 128.

#### 7.4.1.2 Other coefficients

The ac coefficients are obtained by decoding the variable length codes to produce EVENTS. An EVENT is a combination of a last non-zero coefficient indication (LAST; "0": there are more nonzero coefficients in this block, "1": this is the last nonzero coefficient in this block), the number of successive zeros preceding the coded coefficient (RUN), and the non-zero value of the coded coefficient (LEVEL).

When short\_video\_header is 1, the most commonly occurring EVENTS are coded with the variable length codes given in Table B-17 (for all coefficients other than intra DC whether in intra or inter blocks). The last bit "s" denotes the sign of level, "0" for positive and "1" for negative.

When short\_video\_header is 0, the variable length code table is different for intra blocks and inter blocks. The most commonly occurring EVENTS for the luminance and chrominance components of intra blocks in this case are decoded by referring to Table B-16. The most commonly occurring EVENTS for the luminance and chrominance components of inter blocks in this case are decoded by referring to Table B-17. The last bit "s" denotes the sign of level, "0" for positive and "1" for negative. The combinations of (LAST, RUN, LEVEL) not represented in these tables are decoded as described in subclause 7.4.1.3.

#### 7.4.1.3 Escape code

Many possible EVENTS have no variable length code to represent them. In order to encode these statistically rare combinations an Escape Coding method is used. The escape codes of DCT coefficients are encoded in five modes. The first three of these modes are used when short\_video\_header is 0 and in the case that the reversible VLC tables are not used, and the fourth is used when short\_video\_header is 1. In the case that the reversible VLC tables are used, the fifth escape coding method as in Table B-23 is used. Their decoding process is specified below.

Type 1 : ESC is followed by "0", and the code following ESC + "0" is decoded as a variable length code using the standard Tcoef VLC codes given in Table B-16 and Table B-17, but the values of LEVEL are modified following decoding to give the restored value LEVEL<sup>s</sup>, as follows:

$$\text{LEVEL}^s = \text{sign}(\text{LEVEL}^+) \times [\text{abs}(\text{LEVEL}^+) + \text{LMAX}]$$

where LEVEL<sup>+</sup> is the value after variable length decoding and LMAX is obtained from Table B-19 and Table B-20 as a function of the decoded values of RUN and LAST.

Type 2 : ESC is followed by "10", and the code following ESC + "10" is decoded as a variable length code using the standard Tcoef VLC codes given in Table B-16 and Table B-17, but the values of RUN are modified following decoding to give the restored value RUN<sup>s</sup>, as follows:

$$\text{RUN}^s = \text{RUN}^+ + (\text{RMAX} + 1)$$

where RUN<sup>+</sup> is the value after variable length decoding. RMAX is obtained from Table B-21 and Table B-22 as a function of the decoded values of LEVEL and LAST.

Type 3 : ESC is followed by "11", and the code following ESC + "11" is decoded as fixed length codes. This type of escape codes are represented by 1-bit LAST, 6-bit RUN and 12-bit LEVEL. A marker bit is inserted before and after the 12-bit-LEVEL in order to avoid the resync\_marker emulation. Use of this escape sequence for encoding the combinations listed in Table B-16 and Table B-17 is prohibited. The codes for RUN and LEVEL are given in Table B-18.

Type 4: The fourth type of escape code is used if and only if short\_video\_header is 1. In this case, the 15 bits following ESC are decoded as fixed length codes represented by 1-bit LAST, 6-bit RUN and 8-bit LEVEL. The values 0000 0000 and 1000 000 for LEVEL are not used (they are reserved).

#### 7.4.1.4 Intra dc coefficient decoding for the case of switched vlc encoding

At the VOP layer, using quantizer value as the threshold, a 3 bit code (intra\_dc\_vlc\_thr) allows switching between 2 VLCs (DC Intra VLC and AC Intra VLC) when decoding DC coefficients of Intra macroblocks, see Table 6-21.

NOTE When the intra AC VLC is turned on, Intra DC coefficients are not handled separately any more, but treated the same as all other coefficients. That means that a zero Intra DC coefficient will not be coded but will simply increase the run for the following AC coefficients. The definitions of mcbpc and cbpy in subclause 6.3.6 are changed accordingly.

#### 7.4.2 Inverse scan

This subclause specifies the way in which the one dimensional data, QFS[n] is converted into a two-dimensional array of coefficients denoted by PQF[v][u] where u and v both lie in the range of 0 to 7. Let the data at the output of the variable length decoder be denoted by QFS[n] where n is in the range of 0 to 63. Three scan patterns are defined as shown in Figure 7-4. The scan that shall be used is determined by the following method. For intra blocks, if acpred\_flag=0, zigzag scan is selected for all blocks in a macroblock. Otherwise, DC prediction direction is used to select a scan on block basis. For instance, if the DC prediction refers to the horizontally adjacent block, alternate-

vertical scan is selected for the current block. Otherwise (for DC prediction referring to vertically adjacent block), alternate-horizontal scan is used for the current block. For all other blocks, the 8x8 blocks of transform coefficients are scanned in the “zigzag” scanning direction.

0	1	2	3	10	11	12	13
4	5	8	9	17	16	15	14
6	7	19	18	26	27	28	29
20	21	24	25	30	31	32	33
22	23	34	35	42	43	44	45
36	37	40	41	46	47	48	49
38	39	50	51	56	57	58	59
52	53	54	55	60	61	62	63

0	4	6	20	22	36	38	52
1	5	7	21	23	37	39	53
2	8	19	24	34	40	50	54
3	9	18	25	35	41	51	55
10	17	26	30	42	46	56	60
11	16	27	31	43	47	57	61
12	15	28	32	44	48	58	62
13	14	29	33	45	49	59	63

0	1	5	6	14	15	27	28
2	4	7	13	16	26	29	42
3	8	12	17	25	30	41	43
9	11	18	24	31	40	44	53
10	19	23	32	39	45	52	54
20	22	33	38	46	51	55	60
21	34	37	47	50	56	59	61
35	36	48	49	57	58	62	63

Figure 7-4 -- (a) Alternate-Horizontal scan (b) Alternate-Vertical scan (c) Zigzag scan

#### 7.4.3 Intra dc and ac prediction for intra macroblocks

This subclause specifies the prediction process for decoding of coefficients. This prediction process is only carried out for intra-macroblocks (I-MBs) and when short\_video\_header is “0”. When short\_video\_header is “1” or the macroblock is not an I-MB, this prediction process is not performed.

##### 7.4.3.1 DC and AC Prediction Direction

This adaptive selection of the DC and AC prediction direction is based on comparison of the horizontal and vertical DC gradients around the block to be decoded. Figure 7-5 shows the three blocks surrounding the block to be decoded. Block ‘X’, ‘A’, ‘B’ and ‘C’ respectively refer to the current block, the left block, the above-left block, and the block immediately above, as shown.

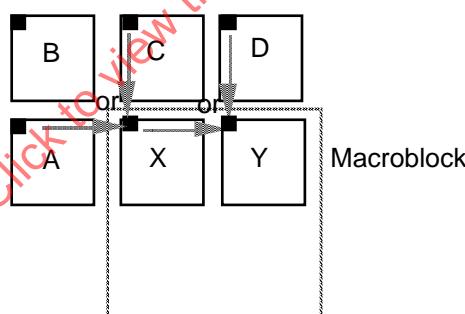


Figure 7-5 -- Previous neighboring blocks used in DC prediction

The inverse quantized DC values of the previously decoded blocks,  $F[0][0]$ , are used to determine the direction of the DC and AC prediction as follows.

if (  $|F_A[0][0] - F_B[0][0]| < |F_B[0][0] - F_C[0][0]|$  )

predict from block C

else

predict from block A

If any of the blocks A, B or C are outside of the VOP boundary, or the video packet boundary, or they do not belong to an intra coded macroblock, their  $F[0][0]$  values are assumed to take a value of  $2^{(\text{bits\_per\_pixel}+2)}$  and are used to compute the prediction values.

#### 7.4.3.2 Adaptive DC Coefficient Prediction

The adaptive DC prediction method involves selection of either the  $F[0][0]$  value of immediately previous block or that of the block immediately above it (in the previous row of blocks) depending on the prediction direction determined above.

if (predict from block C)

$$QF_x[0][0] = PQF_x[0][0] + F_c[0][0] // dc\_scaler$$

else

$$QF_x[0][0] = PQF_x[0][0] + F_a[0][0] // dc\_scaler$$


dc\_scalar is defined in Table 7-1. This process is independently repeated for every block of a macroblock using the appropriate immediately horizontally adjacent block 'A' and immediately vertically adjacent block 'C'.

DC predictions are performed similarly for the luminance and each of the two chrominance components.

#### 7.4.3.3 Adaptive ac coefficient prediction

This process is used when ac\_pred\_flag = '1', which indicates that AC prediction is performed when decoding the coefficients.

Either coefficients from the first row or the first column of a previous coded block are used to predict the co-sited coefficients of the current block. On a block basis, the best direction (from among horizontal and vertical directions) for DC coefficient prediction is also used to select the direction for AC coefficients prediction; thus, within a macroblock, for example, it becomes possible to predict each block independently from either the horizontally adjacent previous block or the vertically adjacent previous block. The AC coefficients prediction is illustrated in Figure 7-6.

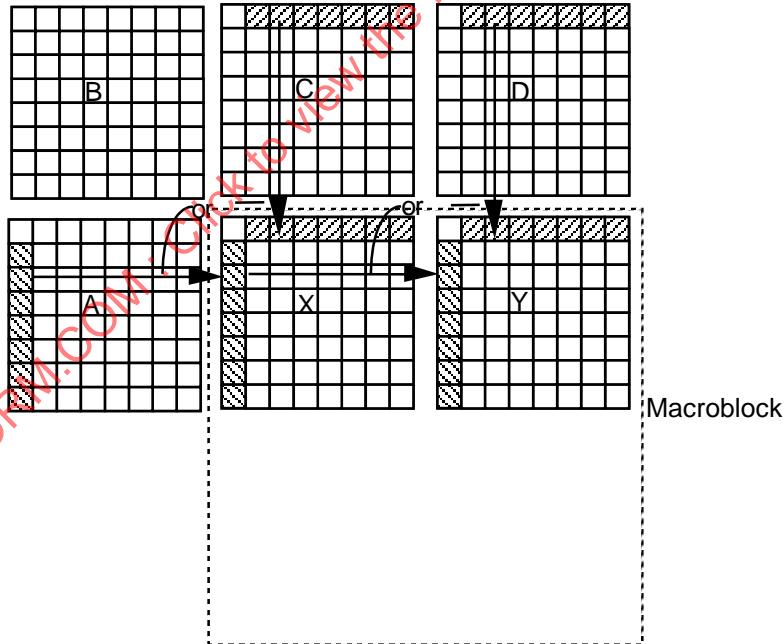

**Figure 7-6 -- Previous neighboring blocks and coefficients used in AC prediction**

To compensate for differences in the quantization of previous horizontally adjacent or vertically adjacent blocks used in AC prediction of the current block, scaling of prediction coefficients becomes necessary. Thus the prediction is modified so that the predictor is scaled by the ratio of the current quantisation stepsize and the quantisation stepsize of the predictor block. The definition is given in the equations below.

If block 'A' was selected as the predictor for the block for which coefficient prediction is to be performed, calculate the first column of the quantized AC coefficients as follows.

$$QF_x[0][i] = PQF_x[0][i] + (QF_A[0][i] * QP_A) // QP_x \quad i = 1 \text{ to } 7$$

If block 'C' was selected as the predictor for the block for which coefficient prediction is to be performed, calculate the first row of the quantized AC coefficients as follows.

$$QF_x[j][0] = PQF_x[j][0] + (QF_C[j][0] * QP_C) // QP_x \quad i = 1 \text{ to } 7$$

If the prediction block (block 'A' or block 'C') is outside of the boundary of the VOP or video packet, then all the prediction coefficients of that block are assumed to be zero.

#### 7.4.3.4 Saturation of $QF[v][u]$

The quantized coefficients resulting from the DC and AC Prediction are saturated to lie in the range [-2048, 2047]. Thus:

$$QF[v][u] = \begin{cases} 2047 & QF[v][u] > 2047 \\ QF[v][u] & -2048 \leq QF[v][u] \leq 2047 \\ -2048 & QF[v][u] < -2048 \end{cases}$$

#### 7.4.4 Inverse quantisation

The two-dimensional array of coefficients,  $QF[v][u]$ , is inverse quantised to produce the reconstructed DCT coefficients. This process is essentially a multiplication by the quantiser step size. The quantiser step size is modified by two mechanisms; a weighting matrix is used to modify the step size within a block and a scale factor is used in order that the step size can be modified at the cost of only a few bits (as compared to encoding an entire new weighting matrix).

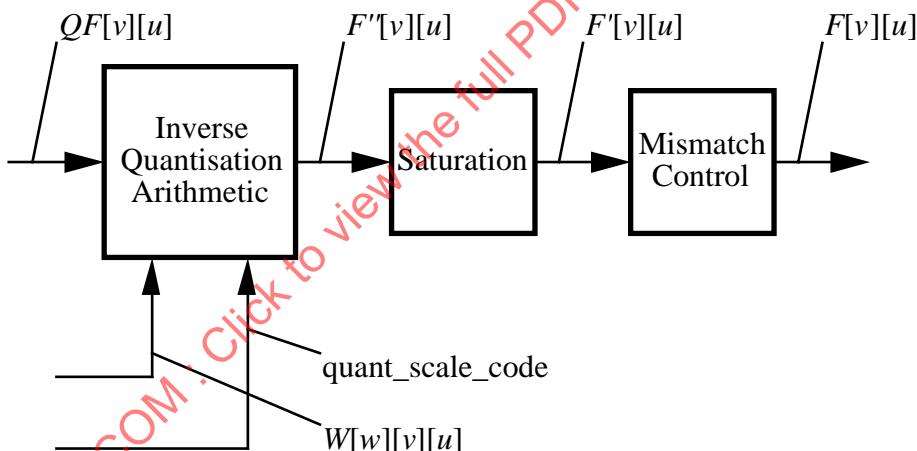


Figure 7-7 -- Inverse quantisation process

Figure 7-7 illustrates the overall inverse quantisation process. After the appropriate inverse quantisation arithmetic the resulting coefficients,  $F'[v][u]$ , are saturated to yield  $F[v][u]$  and then a mismatch control operation is performed to give the final reconstructed DCT coefficients,  $F[v][u]$ .

NOTE Attention is drawn to the fact that the method of achieving mismatch control in this part of ISO/IEC 14496 is identical to that employed by ISO/IEC 13818-2.

##### 7.4.4.1 First inverse quantisation method

This subclause specifies the first of the two inverse quantisation methods. The method described here is used when  $quant\_type$  equals 1.

###### 7.4.4.1.1 Intra dc coefficient

The DC coefficients of intra coded blocks shall be inverse quantised in a different manner to all other coefficients.

In intra blocks  $F'[0][0]$  shall be obtained by multiplying  $QF[0][0]$  by a constant multiplier,

The reconstructed DC values are computed as follows.

$$F'[0][0] = dc\_scaler * QF[0][0]$$

When short\_video\_header is 1, dc\_scaler is 8, otherwise dc\_scaler is defined in Table 7-1.

#### 7.4.4.1.2 Other coefficients

All coefficients other than the DC coefficient of an intra block shall be inverse quantised as specified in this subclause. Two weighting matrices are used. One shall be used for intra macroblocks and the other for non-intra macroblocks. Each matrix has a default set of values which may be overwritten by down-loading a user defined matrix.

Let the weighting matrices be denoted by  $W[w][v][u]$  where  $w$  takes the values 0 to 1 indicating which of the matrices is being used.  $W[0][v][u]$  is for intra macroblocks, and  $W[1][v][u]$  is for non-intra macroblocks. The value of *quantiser\_scale* is determined by vop\_quant, dquant, dbquant, and quant\_scale for luminance and chrominance, and additionally by vop\_quant\_alpha for grayscale alpha. For example, the value of *quantiser\_scale* for luminance and chrominance shall be an integer from 1 to 31 when not\_8\_bit == '0'. The following equation specifies the arithmetic to reconstruct  $F'[v][u]$  from  $QF[v][u]$  (for all coefficients except intra DC coefficients).

$$F''[v][u] = \begin{cases} 0, & \text{if } QF[v][u] = 0 \\ ((2 \times QF[v][u] + k) \times W[w][v][u] \times \text{quantiser\_scale}) / 16, & \text{if } QF[v][u] \neq 0 \end{cases}$$

where :

$$k = \begin{cases} 0 & \text{intra blocks} \\ \text{Sign}(QF[v][u]) & \text{non - intra blocks} \end{cases}$$

NOTE The above equation uses the “/” operator as defined in subclause 4.1.

#### 7.4.4.2 Second inverse quantisation method

This subclause specifies the second of the two inverse quantisation methods. The method described here is used for all the coefficients other than the DC coefficient of an intra block when quant\_type==0. In the second inverse quantization method, the DC coefficient of an intra block is quantized using the same method as in the first inverse quantization method (see subclause 7.4.4.1.1). The quantization parameter *quantiser\_scale* may take integer values from 1 to  $2^{\text{quant\_precision}} - 1$ . The quantization stepsize is equal to twice the *quantiser\_scale*.

##### 7.4.4.2.1 Dequantisation

$$|F''[v][u]| = \begin{cases} 0, & \text{if } QF[v][u] = 0, \\ (2 \times |QF[v][u]| + 1) \times \text{quantiser\_scale}, & \text{if } QF[v][u] \neq 0, \text{ quantiser\_scale is odd,} \\ (2 \times |QF[v][u]| + 1) \times \text{quantiser\_scale} - 1, & \text{if } QF[v][u] \neq 0, \text{ quantiser\_scale is even.} \end{cases}$$

The sign of  $QF[v][u]$  is then incorporated to obtain  $F''[v][u]$ :  $F''[v][u] = \text{Sign}(QF[v][u]) \times |F''[v][u]|$

#### 7.4.4.3 Nonlinear inverse DC quantisation

NOTE This subclause is valid for both quantization methods.

Within an Intra macroblock for which short\_video\_header is 0, luminance blocks are called type 1 blocks, chroma blocks are classified as type 2. When short\_video\_header is 1, the inverse quantization of DC intra coefficients is equivalent to using a fixed value of dc\_scaler = 8, as described above in subclause 7.4.1.1.

- DC coefficients of Type 1 blocks are quantized by Nonlinear Scaler for Type 1
- DC coefficients of Type 2 blocks are quantized by Nonlinear Scaler for Type 2

Table 7-1 specifies the nonlinear dc\_scaler expressed in terms of piece-wise linear characteristics.

**Table 7-1 -- Non linear scaler for DC coefficients of DCT blocks, expressed in terms of relation with quantizer\_scale**

Component:Type	dc_scaler for quantiser_scale range			
	1 through 4	5 through 8	9 through 24	>= 25
Luminance: Type1	8	2x quantiser_scale	quantiser_scale +8	2 x quantiser_scale -16
Chrominance: Type2	8	(quantiser_scale +13)/2		quantiser_scale -6

#### 7.4.4.4 Saturation

The coefficients resulting from the Inverse Quantisation Arithmetic are saturated to lie in the range  $[-2\text{bits\_per\_pixel} + 3, 2\text{bits\_per\_pixel} + 3 - 1]$ . Thus:

$$F'[v][u] = \begin{cases} 2^{\text{bits\_per\_pixel}+3} - 1 & F''[v][u] > 2^{\text{bits\_per\_pixel}+3} - 1 \\ F''[v][u] & -2^{\text{bits\_per\_pixel}+3} \leq F''[v][u] \leq 2^{\text{bits\_per\_pixel}+3} - 1 \\ -2^{\text{bits\_per\_pixel}+3} & F''[v][u] < -2^{\text{bits\_per\_pixel}+3} \end{cases}$$

#### 7.4.4.5 Mismatch control

This mismatch control is only applicable to the first inverse quantization method. Mismatch control shall be performed by any process equivalent to the following. Firstly all of the reconstructed, saturated coefficients,  $F'[v][u]$  in the block shall be summed. This value is then tested to determine whether it is odd or even. If the sum is even then a correction shall be made to just one coefficient;  $F[7][7]$ . Thus,

$$\begin{aligned} \text{sum} &= \sum_{v=0}^{v<8} \sum_{u=0}^{u<8} F'[v][u] \\ F[7][7] &= F'[7][7] \text{ for all } u, v \text{ except } u = v = 7 \\ F[7][7] &= \begin{cases} F'[7][7] & \text{if sum is odd} \\ \begin{cases} F'[7][7] + 1 & \text{if } F'[7][7] \text{ is odd} \\ F'[7][7] + 1 & \text{if } F'[7][7] \text{ is even} \end{cases} & \text{if sum is even} \end{cases} \end{aligned}$$

**NOTE 1** It may be useful to note that the above correction for  $F[7][7]$  may simply be implemented by toggling the least significant bit of the two's complement representation of the coefficient. Also since only the "oddness" or "evenness" of the sum is of interest an exclusive OR (of just the least significant bit) may be used to calculate "sum".

**NOTE 2** Warning. Small non-zero inputs to the IDCT may result in zero output for compliant IDCTs. If this occurs in an encoder, mismatch may occur in some pictures in a decoder that uses a different compliant IDCT. An encoder should avoid this problem and may do so by checking the output of its own IDCT. It should ensure that it never inserts any non-zero coefficients into the bitstream when the block in question reconstructs to zero through its own IDCT function. If this action is not taken by the encoder, situations can arise where large and very visible mismatches between the state of the encoder and decoder occur.

#### 7.4.4.6 Summary of quantiser process for method 1

In summary, the method 1 inverse quantisation process is any process numerically equivalent to:

```

for (v=0; v<8; v++) {
  for (u=0; u<8; u++) {
    if (QF[v][u] == 0)
      F'[v][u] = 0;
    else if ( (u==0) && (v==0) && (macroblock_intra) ) {
      F'[v][u] = dc_scaler * QF[v][u];
    } else {
      if ( macroblock_intra ) {
        F'[v][u] = ( QF[v][u] * W[0][v][u] * quantiser_scale * 2 ) / 32;
      } else {
        F'[v][u] = ( ( QF[v][u] * 2 ) + Sign(QF[v][u]) ) * W[1][v][u]
                     * quantiser_scale ) / 32;
      }
    }
  }
}

sum = 0;
for (v=0; v<8; v++) {
  for (u=0; u<8; u++) {
    if ( F'[v][u] > 2bits_per_pixel + 3 - 1 ) {
      F[v][u] = 2bits_per_pixel + 3 - 1;
    } else {
      if ( F'[v][u] < -2bits_per_pixel + 3 ) {
        F[v][u] = -2bits_per_pixel + 3;
      } else {
        F[v][u] = F'[v][u];
      }
    }
    sum = sum + F[v][u];
    F[v][u] = F[v][u];
  }
}

if ((sum & 1) == 0) {
  if ((F[7][7] & 1) != 0) {
    F[7][7] = F[7][7] - 1;
  } else {
    F[7][7] = F[7][7] + 1;
  }
}

```

#### 7.4.5 Inverse DCT

Once the DCT coefficients,  $F[u][v]$  are reconstructed, the inverse DCT transform defined in annex A shall be applied to obtain the inverse transformed values,  $f[y][x]$ . These values shall be saturated so that:  $-2^{N_{\text{bit}}} \leq f[y][x] \leq 2^{N_{\text{bit}}} - 1$ , for all  $x, y$ .

#### 7.5 Shape decoding

Binary shape decoding is based on a block-based representation. The primary coding methods are block-based context-based binary arithmetic decoding and block-based motion compensation. The primary data structure used is denoted as the binary alpha block (bab). The bab is a square block of binary valued pixels representing the opacity/transparency for the pixels in a specified block-shaped spatial region of size 16x16 pels. In fact, each bab is co-located with each texture macroblock.

## 7.5.1 Higher syntactic structures

### 7.5.1.1 VOL decoding

If `video_object_layer_shape` is equal to '00' then no binary shape decoding is required. Otherwise, binary shape decoding is carried out.

### 7.5.1.2 VOP decoding

If `video_object_layer_shape` is not equal to '00' then, for each subsequent VOP, the dimensions of the bounding rectangle of the reconstructed VOP are obtained from:

- `vop_width`
- `vop_height`

If these decoded dimensions are not multiples of 16, then the values of `vop_width` and `vop_height` are rounded up to the nearest integer, which is a multiple of 16.

Additionally, in order to facilitate motion compensation, the horizontal and spatial position of the VOP are obtained from:

- `vop_horizontal_mc_spatial_ref`
- `vop_vertical_mc_spatial_ref`

These spatial references may be different for each VOP but the same coordinate system must be used for all VOPs within a vol. Additionally, the decoded spatial references must have an even value.

- `vop_shape_coding_type`

This flag is used in error resilient mode and enables the use of intra shape codes in P-VOPs. Finally, in the VOP class, it is necessary to decode

- `change_conv_ratio_disable`

This specifies whether `conv_ratio` is encoded at the macroblock layer.

Once the above elements have been decoded, the binary shape decoder may be applied to decode the shape of each macroblock within the bounding rectangle.

## 7.5.2 Macroblock decoding

The shape information for each macroblock residing within the bounding rectangle of the VOP is decoded into the form of a 16x16 bab.

### 7.5.2.1 Mode decoding

Each bab belongs to one of seven types listed in Table 7-2. The type information is given by the `bab_type` field which influences decoding of further shape information. For I-VOPs only three out of the seven modes are allowed as shown in Table 7-2.

Table 7-2 -- List of bab types

<b>bab_type</b>	<b>Semantic</b>	<b>Used in</b>
0	MVDs==0 && No Update	P-,B-VOPs
1	MVDs!=0 && No Update	P-,B-VOPs
2	Transparent	All VOP types
3	Opaque	All VOP types
4	IntraCAE	All VOP types

5	MVDs==0 && interCAE	P- ,B-VOPs
6	MVDs!=0 && interCAE	P- ,B-VOPs

### 7.5.2.1.1 I-VOPs

Suppose that  $f(x, y)$  is the bab\_type of the bab located at  $(x, y)$ , where  $x$  is the BAB column number and  $y$  is the BAB row number. The code word for the bab\_type at the position  $(i, j)$  is determined as follows. A context C is computed from previously decoded bab\_type's.

$$C = 27*(f(i-1,j-1)-2) + 9*(f(i,j-1)-2) + 3*(f(i+1,j-1)-2) + (f(i-1,j)-2)$$

If  $f(x, y)$  references a bab outside the current VOP, bab\_type is assumed to be transparent for that bab (i.e.  $f(x, y)=2$ ). The bab\_type of babs outside the current video packet is also assumed to be transparent. The VLC used to decode bab\_type for the current bab is switched according to the value of the context C. This context-switched VLC table is given in Table B-27.

### 7.5.2.1.2 P- and B-VOPs

The decoding of the current bab\_type is dependent on the bab\_type of the co-located bab in the reference VOP. The reference VOP is either a forward reference VOP or a backward reference VOP. The forward reference VOP is defined as the most recent non-empty (i.e.  $vop_coded != 0$ ) I- or P-VOP in the past, while the backward VOP is defined as the most recently decoded I- or P-VOP in the future. If the current VOP is a P-VOP, the forward reference VOP is selected as the reference VOP. If the current VOP is a B-VOP the following decision rules are applied:


1. If one of the reference VOPs is empty, the non-empty one (forward/backward) is selected as the reference VOP for the current B-VOP.
2. If both reference VOPs are non-empty, the forward reference VOP is selected if its temporal distance to the current B-VOP is not larger than that of the backward reference VOP, otherwise, the backward one is chosen.

In the special cases when  $closed\_gov == 1$  and the forward reference VOP belongs to the previous GOV, the current B-VOP takes the backward VOP as reference.

If the sizes of the current and reference VOPs are different, some babs in the current VOP may not have a co-located equivalent in the reference VOP. Therefore the bab\_type matrix of the reference VOP is manipulated to match the size of the current VOP. Two rules are defined for that purpose, namely a cut rule and a copy rule:

- **cut rule.** If the number of lines (respectively columns) is smaller in the current VOP than in the reference VOP, the bottom lines (respectively rightmost columns) are eliminated from the reference VOP such that both VOP sizes match.
- **copy rule.** If the number of lines (respectively columns) is larger in the current VOP than in the reference VOP, the bottom line (respectively rightmost column) is replicated as many times as needed in the reference VOP such that both VOP sizes match.

An example is shown in Figure 7-8 where both rules are applied.

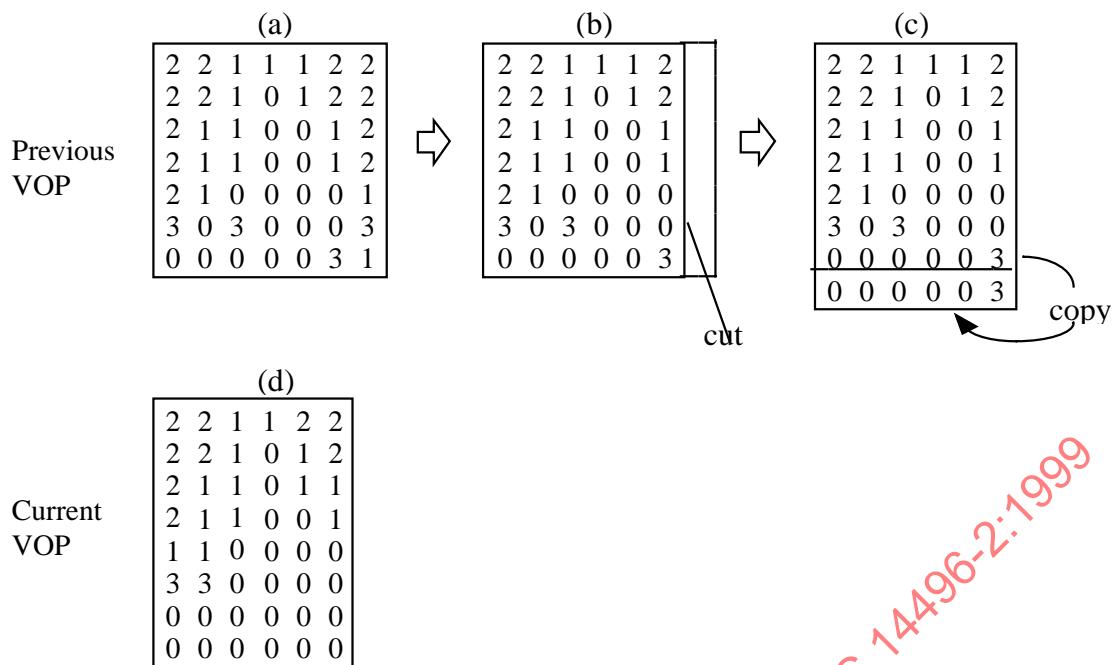

**Figure 7-8 -- Example of size fitting between current VOP and reference VOP. The numbers represent the type of each bab**

The VLC to decode the current bab\_type is switched according to the value of bab\_type of the co-located bab in the reference VOP. This context-switched VLC tables for P and B VOPs are given in Table B-28. If the type of the bab is transparent, then the current bab is filled with zero (transparent) values. A similar procedure is carried out if the type is opaque, where the reconstructed bab is filled with values of 255 (opaque). For both transparent and opaque types, no further decoding of shape-related data is required for the current bab. Otherwise further decoding steps are necessary, as listed in Table 7-3. Decoding for motion compensation is described in subclause 7.5.2.2, and cae decoding in subclause 7.5.2.5.

**Table 7-3 -- Decoder components applied for each type of bab**

bab_type	Motion compensation	CAE decoding
0	yes	no
1	yes	no
2	no	no
3	no	no
4	no	yes
5	yes	yes
6	yes	yes

### 7.5.2.2 Binary alpha block motion compensation

Motion Vector of shape (MVs) is used for motion compensation (MC) of shape. The value of MVs is reconstructed as described in subclause 7.5.2.3. Integer pixel motion compensation is carried out on a 16x16 block basis according to subclause 7.5.2.4. Overlapped MC, half sample MC and 8x8 MC are not carried out.


If bab\_type is MVDs==0 && No Update or MVDs!=0 && No Update then the motion compensated bab is taken to be the decoded bab, and no further decoding of the bab is necessary. Otherwise, cae decoding is required.

### 7.5.2.3 Motion vector decoding

If `bab_type` indicates that `MVDs!=0`, then `mvds_x` and `mvds_y` are VLC decoded. For decoding `mvds_x`, the VLC given in Table B-29 is used. The same table is used for decoding `mvds_y`, unless the decoded value of `mvds_x` is zero. If `mvds_x == 0`, the VLC given in Table B-30 is used for decoding `mvds_y`. If `bab_type` indicates that `MVDs==0`, then both `mvds_x` and `mvds_y` are set to zero.

The integer valued shape motion vector  $MVs=(mvs_x, mvs_y)$  is determined as the sum of a predicted motion vector  $MVPs$  and  $MVDs = (mvds_x, mvds_y)$ , where  $MVPs$  is determined as follows.

$MVPs$  is determined by analysing certain candidate motion vectors of shape (MVs) and motion vectors of selected texture blocks (MV) around the MB corresponding to the current `bab`. They are located and denoted as shown in Figure 7-9 where  $MV1$ ,  $MV2$  and  $MV3$  are rounded up to integer values towards 0. If the selected texture block is a field predicted macroblock, then  $MV1$ ,  $MV2$  or  $MV3$  are generated by averaging the two field motion vectors and rounding toward zero. Regarding the texture MV's, the convention is that a MB possessing only 1 MV is considered the same as a MB possessing 4 MV's, where the 4 MV's are equal. By traversing  $MVs1$ ,  $MVs2$ ,  $MVs3$ ,  $MV1$ ,  $MV2$  and  $MV3$  in this order,  $MVPs$  is determined by taking the first encountered MV that is defined. If no candidate motion vectors is defined,  $MVPs = (0,0)$ .

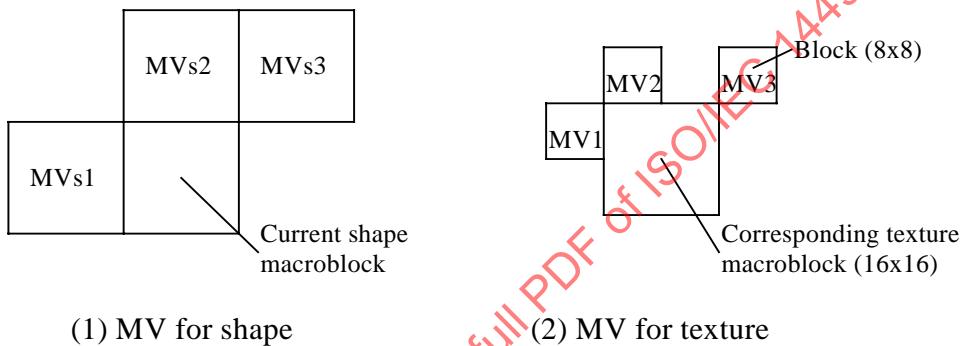

**Figure 7-9 -- Candidates for MVPs**

In the case that `video_object_layer_shape` is “`binary_only`” or `vop_coding_type` indicates B-VOP,  $MVPs$  is determined by considering the motion vectors of shape ( $MVs1$ ,  $MVs2$  and  $MVs3$ ) only. The following subclauses explain the definition of  $MVs1$ ,  $MVs2$ ,  $MVs3$ ,  $MV1$ ,  $MV2$  and  $MV3$  in more detail.

#### Defining candidate predictors from texture motion vectors:

One shape motion vector predictor  $MV_i$  ( $i = 1, 2, 3$ ) is defined for each block located around the current `bab` according to Figure 7-9 (2). The definition only depends on the transparency of the reference MB.  $MV_i$  is set to the corresponding block vector as long as it is in a non-transparent reference MB, otherwise, it is not defined. Note that if a reference MB is outside the current VOP or video packet, it is treated as a transparent MB.

#### Defining candidate predictors from shape motion vectors:

The candidate motion vector predictors  $MVs_i$  are defined by the shape motion vectors of neighbouring `bab` located according to Figure 7-9 (1). The  $MVs_i$  are defined according to Table 7-4.

**Table 7-4 -- Definition of candidate shape motion vector predictors  $MVs1$ ,  $MVs2$ , and  $MVs3$  from shape motion vectors for P and B-VOPs. Note that interlaced modes are not included**

Shape mode of reference MB	$MVs_i$ for each reference shape block- $i$ (a shape block is 16x16)
$MVDs == 0$ or $MVDs != 0$ <code>bab_type</code> 0, 1, 5, 6	The retrieved shape motion vector of the said reference MB is defined as $MVs_i$ . Note that $MVs_i$ is defined, and hence valid, even if the reconstructed shape block is transparent.
<code>all_0</code> , <code>bab_type</code> 2	$MVs_i$ is undefined

all=255, bab_type 3	MVs <sub>i</sub> is undefined
Intra, bab_type 4	MVs <sub>i</sub> is undefined

If the reference MB is outside of the current video packet, MV<sub>i</sub> and MVs<sub>i</sub> are undefined.

#### 7.5.2.4 Motion compensation

For inter mode babs (bab\_type = 0,1,5 or 6), motion compensation is carried out by simple MV displacement according to the MVs.

Specifically, when bab\_type is equal to 0 or 1 i.e. for the no-update modes, a displaced block of 16x16 pixels is copied from the binary alpha map of the previously decoded I or P VOP for which vop\_coded is not equal to '0'. When the bab\_type is equal to 5 or 6 i.e. when interCAE decoding is required, then the pixels immediately bordering the displaced block (to the left, right, top and bottom) are also copied from the most recent valid reference VOP's (as defined in subclause 6.3.5) binary alpha map into a temporary shape block of 18x18 pixels size (see Figure 7-12). If the displaced position is outside the bounding rectangle, then these pixels are assumed to be "transparent".

If the current VOP is a B-VOP the following decision rules are applied:

- If one of the reference VOPs is empty (i.e. VOP\_coded is 0), the non-empty one (forward/backward) is selected as the reference VOP for the current B-VOP.
- If both reference VOPs are non-empty, the forward reference VOP is selected if its temporal distance to the current B-VOP is not larger than that of the backward reference VOP, otherwise, the backward one is chosen.

In the special cases when closed\_gov == 1 and the forward reference VOP belongs to the previous GOV, the current B-VOP takes the backward VOP as reference.

#### 7.5.2.5 Context based arithmetic decoding

Before decoding the binary\_arithmetic\_code field, border formation (see subclause 7.5.2.5.2) needs to be carried out. Then, if the scan\_type field is equal to 0, the bordered to-be decoded bab and the eventual bordered motion compensated bab need to be transposed (as for matrix transposition). If change\_conv\_rate\_disable is equal to 0, then conv\_ratio is decoded to determine the size of the sub-sampled BAB, which is 16/conv\_ratio by 16/conv\_ratio pixels large. If change\_conv\_rate\_disable is equal to 1, then the decoder assumes that the bab is not subsampled and thus the size is simply 16x16 pixels. Binary\_arithmetic\_code is then decoded by a context-based arithmetic decoder as follows. The arithmetic decoder is firstly initialised (see subclause 7.5.3.3). The pixels of the sub-sampled bab are decoded in raster order. At each pixel,


1. A context number is computed based on a template, as described in subclause 7.5.2.5.1.
2. The context number is used to access the probability table (Table B-32).
3. Using the accessed probability value, the next bits of binary\_arithmetic\_code are decoded by the arithmetic decoder to give the decoded pixel value.

When all pixels in sub-sampled BAB have been decoded, the arithmetic decoder is terminated (see subclause 7.5.3.6).

If the scan\_type field is equal to 0, the decoded bab is transposed. Then up-sampling is carried out if conv\_ratio is different from 1, as described in subclause 7.5.2.5.3. Then the decoded bab is copied into the decoded shape map.

##### 7.5.2.5.1 Context computation

For INTRA coded BABs, a 10 bit context  $C = \sum_k c_k \cdot 2^k$  is built for each pixel as illustrated in Figure 7-10 (a), where  $c_k=0$  for transparent pixels and  $c_k=1$  for opaque pixels.

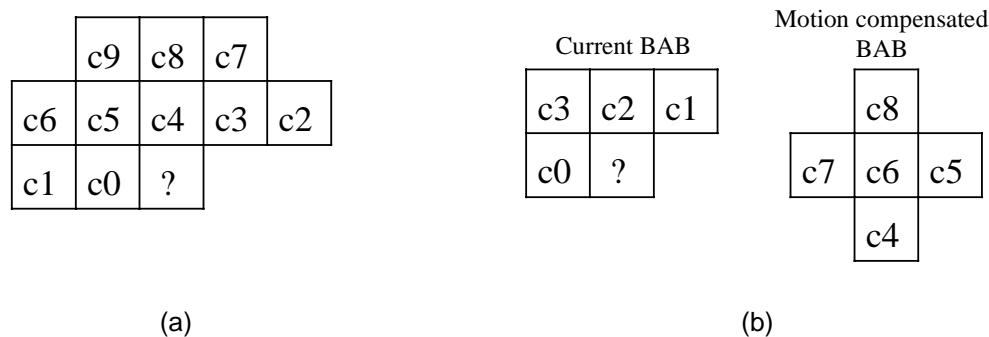

**Figure 7-10 -- (a) The INTRA template (b) The INTER template where c6 is aligned with the pixel to be decoded. The pixel to be decoded is marked with ‘?’**


For INTER coded BABs, temporal redundancy is exploited by using pixels from the bordered motion compensated BAB (depicted in Figure 7-12) to make up part of the context. Specifically, a 9 bit context  $C = \sum_k c_k \cdot 2^k$  is built as illustrated in Figure 7-10 (b).

There are some special cases to note.

- When building contexts, any pixels outside the bounding rectangle of the current VOP to the left and above are assumed to be zero (transparent).
- When building contexts, any pixels outside the space of the current video packet to the left and above are assumed to be zero (transparent).
- The template may cover pixels from BABs which are unknown at decoding time. Unknown pixels are defined as area U in Figure 7-11.
- The values of these unknown pixels are defined by the following procedure:
  - When constructing the INTRA context, the following steps are taken in the sequence
    1. if (c7 is unknown)  $c7=c8$ ,
    2. if (c3 is unknown)  $c3=c4$ ,
    3. if (c2 is unknown)  $c2=c3$ .
  - When constructing the INTER context, the following conditional assignment is performed.
   
if (c1 is unknown)  $c1=c2$

#### 7.5.2.5.2 Border formation

When decoding a BAB, pixels from neighbouring BABs shall be used to make up the context. For both the INTRA and INTER cases, a 2 pixel wide border about the current BAB is used where pixels values are known, as depicted in Figure 7-11.

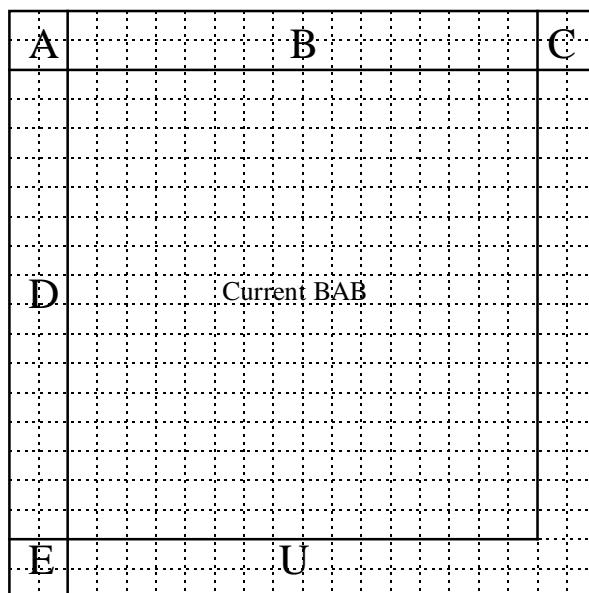

**Figure 7-11 -- Bordered BAB.** A: TOP\_LEFT\_BORDER. B: TOP\_BORDER. C: TOP\_RIGHT\_BORDER. D: LEFT\_BORDER. E: BOTTOM\_LEFT\_BORDER. U: pixels which are unknown when decoding the current BAB

If the value of conv\_ratio is not equal to 1, a sub-sampling procedure is further applied to the BAB borders for both the current BAB and the motion compensated BAB.


The border of the current BAB is partitioned into 5 regions:

- TOP\_LEFT\_BORDER, which contains pixels from the BAB located to the upper-left of the current BAB and which consists of 2 lines of 2 pixels
- TOP\_BORDER, which contains pixels from the BAB located above the current BAB and which consists of 2 lines of 16 pixels
- TOP\_RIGHT\_BORDER, which contains pixels from the BAB located to the upper-right of the current BAB and which consists of 2 lines of 2 pixels
- LEFT\_BORDER, which contains pixels from the BAB located to the left of the current BAB and which consists of 2 columns of 16 pixels
- BOTTOM\_LEFT\_BORDER, which contains pixels from the BAB located to the bottom-left of the current BAB and which consists of 2 lines of 2 pixels

The TOP\_LEFT\_BORDER and TOP\_RIGHT\_BORDER are not sub-sampled, and kept as they are. The TOP\_BORDER and LEFT\_BORDER are sub-sampled such as to obtain 2 lines of  $16/\text{conv\_ratio}$  pixels and 2 columns of  $16/\text{conv\_ratio}$  pixels, respectively.

The sub-sampling procedure is performed on a line-basis for TOP\_BORDER, and a column-basis for LEFT\_BORDER. For each line (respectively column), the following algorithm is applied: the line (respectively column) is split into groups of conv\_ratio pixels. For each group of pixels, one pixel is associated in the sub-sampled border. The value of the pixel in the sub-sampled border is OPAQUE if half or more pixels are OPAQUE in the corresponding group. Otherwise the pixel is TRANSPARENT.

The 2x2 BOTTOM\_LEFT\_BORDER is filled by replicating downwards the 2 bottom border samples of the LEFT\_BORDER after the down-sampling (if any).

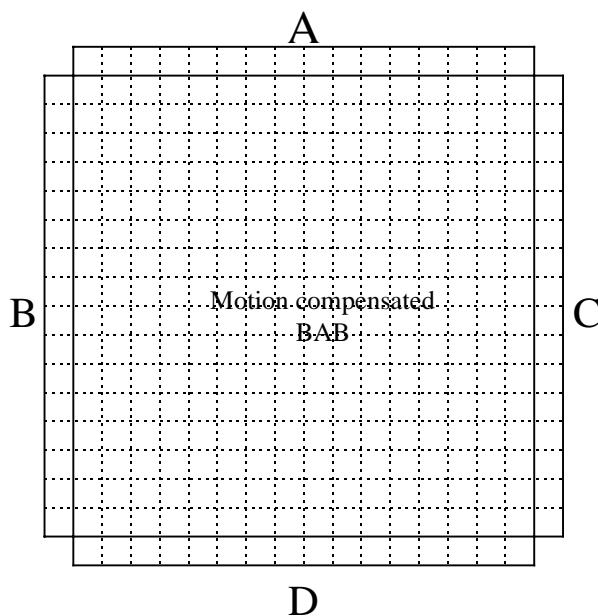

**Figure 7-12 -- Bordered motion compensated BAB. A: TOP\_BORDER. B: LEFT\_BORDER. C: RIGHT\_BORDER. D: BOTTOM\_BORDER**

In the case of a motion compensated BAB, the border is also partitioned into 4, as shown Figure 7-12:

- TOP\_BORDER, which consists of a line of 16 pixels
- LEFT\_BORDER, which consists of a column of 16 pixels
- RIGHT\_BORDER, which consists of a column of 16 pixels
- BOTTOM\_BORDER, which consists of a line of 16 pixels

The very same sub-sampling process as described above is applied to each of these borders.

#### 7.5.2.5.3 Upsampling

When conv\_ratio is different from 1, up-sampling is carried out for the BAB. This is illustrated in Figure 7-13 where "O" in this figure is the coded pixel and "X" is the interpolated pixel. To compute the value of the interpolated pixel, a filter context from the neighboring pixels is first calculated. For the pixel value calculation, the value of "0" is used for a transparent pixel, and "1" for an opaque pixel. The values of the interpolated pixels (Pi, i=1,2,3,4, as shown in Figure 7-14) can then be determined by the following equation:

P1 : if( 4\*A + 2\*(B+C+D) + (E+F+G+H+I+J+K+L) > Th[Cf] ) then "1" else "0"

P2 : if( 4\*B + 2\*(A+C+D) + (E+F+G+H+I+J+K+L) > Th[Cf] ) then "1" else "0"

P3 : if( 4\*C + 2\*(B+A+D) + (E+F+G+H+I+J+K+L) > Th[Cf] ) then "1" else "0"

P4 : if( 4\*D + 2\*(B+C+A) + (E+F+G+H+I+J+K+L) > Th[Cf] ) then "1" else "0"

The 8-bit filter context, Cf, is calculated as follows:

$$C_f = \sum_k c_k \cdot 2^k$$

Based on the calculated Cf, the threshold value (Th[Cf]) can be obtained from the look-up table as follows:

```
Th[256] = {
 3, 6, 6, 7, 4, 7, 7, 8, 6, 7, 5, 8, 7, 8, 8, 9,
 6, 5, 5, 8, 5, 6, 8, 9, 7, 6, 8, 9, 8, 7, 9, 10,
 6, 7, 7, 8, 7, 8, 8, 9, 7, 10, 8, 9, 8, 9, 9, 10,
 7, 8, 6, 9, 6, 9, 9, 10, 8, 9, 9, 10, 11, 10, 10, 11,
 6, 9, 5, 8, 5, 6, 8, 9, 7, 10, 10, 9, 8, 7, 9, 10,
 7, 6, 8, 9, 8, 7, 7, 10, 8, 9, 9, 10, 9, 8, 10, 9,
 7, 8, 8, 9, 6, 9, 9, 10, 8, 9, 9, 10, 9, 10, 10, 9,
 8, 9, 11, 10, 7, 10, 10, 11, 9, 12, 10, 11, 10, 11, 11, 12,
 6, 7, 5, 8, 5, 6, 8, 9, 5, 6, 6, 9, 8, 9, 9, 10,
 5, 8, 8, 9, 6, 7, 9, 10, 6, 7, 9, 10, 9, 10, 10, 11,
 7, 8, 6, 9, 8, 9, 9, 10, 8, 7, 9, 10, 9, 10, 10, 11,
 8, 9, 7, 10, 9, 10, 8, 11, 9, 10, 10, 11, 10, 11, 9, 12,
 7, 8, 6, 9, 8, 9, 9, 10, 10, 9, 7, 10, 9, 10, 10, 11,
 8, 7, 7, 10, 7, 8, 8, 9, 9, 10, 10, 11, 10, 11, 11, 12,
 8, 9, 9, 10, 9, 10, 10, 9, 9, 10, 10, 11, 10, 11, 11, 12,
 9, 10, 10, 11, 10, 11, 11, 12, 10, 11, 11, 12, 11, 12, 12, 13};
```

TOP\_LEFT\_BORDER, TOP\_RIGHT\_BORDER, sub-sampled TOP\_BORDER and sub-sampled LEFT\_BORDER described in the previous subclause are used. The other pixels outside the BAB are extended from the outermost pixels inside the BAB as shown in Figure 7-13.

In the case that conv\_ratio is 4, the interpolation is processed twice. The above mentioned borders of 4x4 BAB are used for the interpolation from 4x4 to 8x8, and top-border (respectively left-border) for the interpolation from 8x8 to 16x16 are up-sampled from the 4x4 BAB top-border (respectively left-border) by simple repetition.

When the BAB is on the left (and/or top) border of VOP, the borders outside VOP are set to zero value. The upsampling filter shall not use pixel values outside of the current video packet.

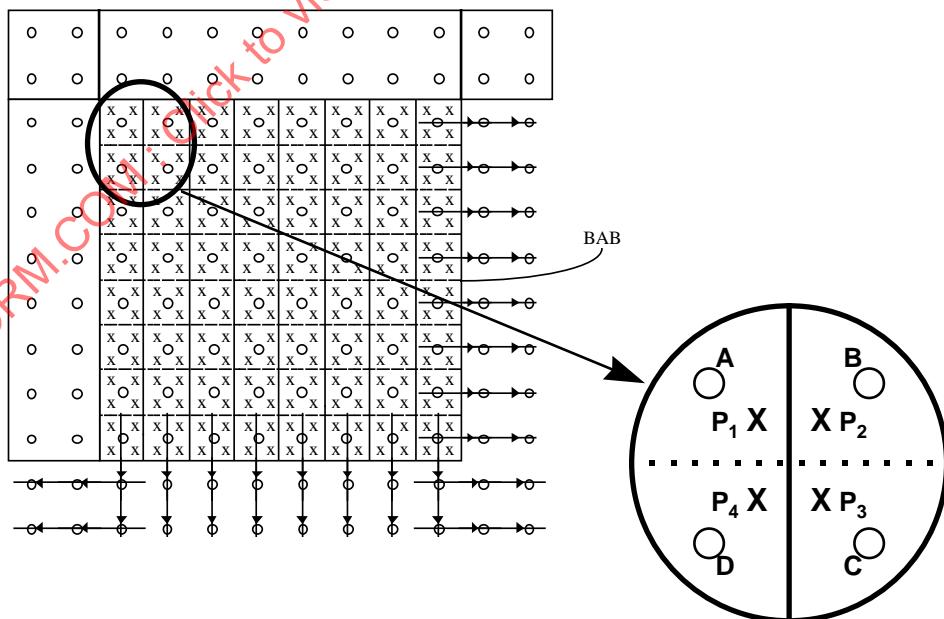


Figure 7-13 -- Upsampling

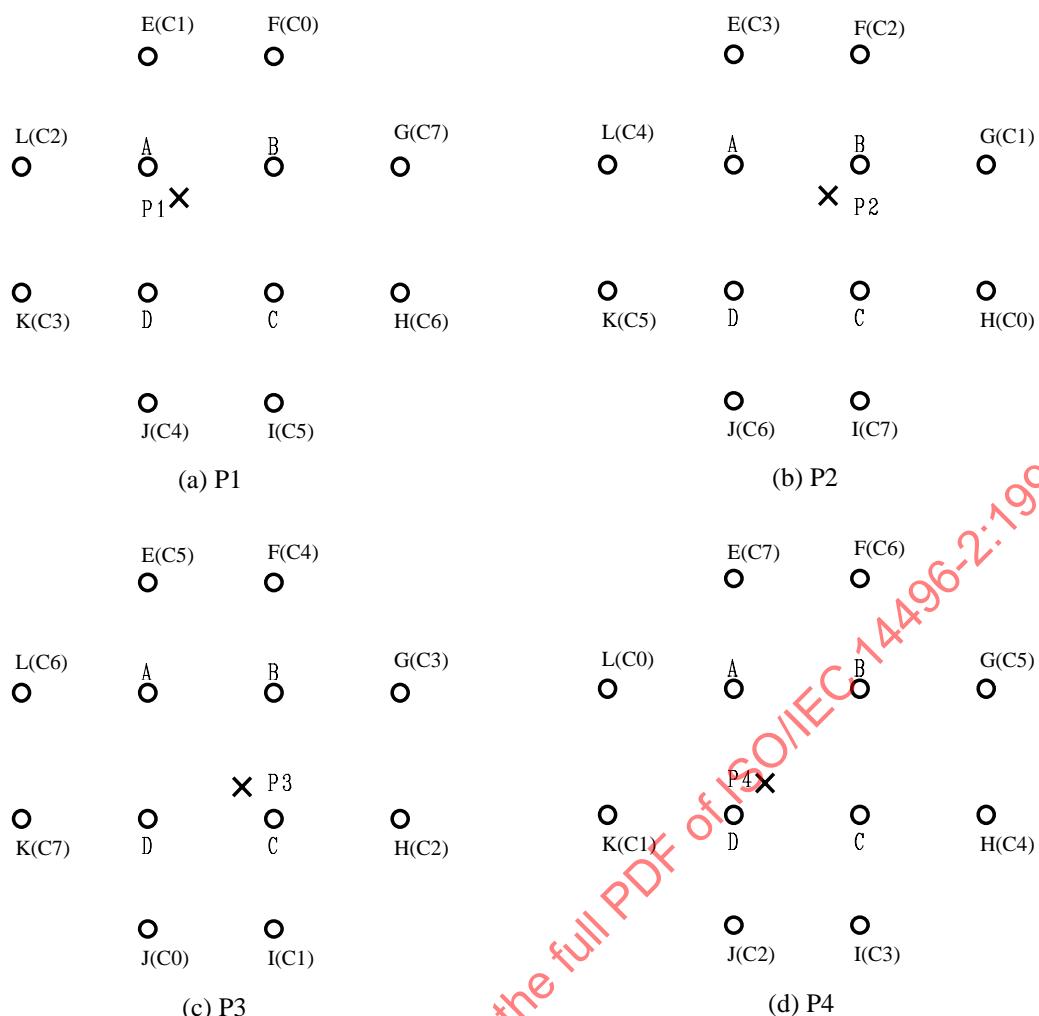


Figure 7-14 -- Interpolation filter and interpolation construction

#### 7.5.2.5.4 Down-sampling process in inter case

If `bab_type` is '5' or '6' (see Table 7-3) downsampling of the motion compensated `bab` is needed for calculating the 9 bit context in the case that `conv_ratio` is not 1. The motion compensated `bab` of size 16x16 pixels is down sampled to `bab` of size  $16/\text{conv\_ratio}$  by  $16/\text{conv\_ratio}$  pixels by the following rules:

- `conv_ratio==2`

If the average of pixel values in 2 by 2 pixel block is equal to or greater than 127.5 the pixel value of the downsampled `bab` is set to 255 otherwise it is set to 0.

- `conv_ratio==4`

If the average of pixel values in 4 by 4 pixel block is equal to or greater than 127.5 the pixel value of the downsampled `bab` is set to 255 otherwise it is set to 0.

#### 7.5.3 Arithmetic decoding

Arithmetic decoding consists of four main steps:

- Removal of stuffed bits
- Initialization which is performed prior to the decoding of the first symbol
- Decoding of the symbol themselves. The decoding of each symbol may be followed by a re-normalization step.
- Termination which is performed after the decoding of the last symbol

### 7.5.3.1 Registers, symbols and constants

Several registers, symbols and constants are defined to describe the arithmetic decoder.

- HALF: 32-bit fixed point constant equal to  $\frac{1}{2}$  (0x80000000)
- QUARTER: 32-bit fixed point constant equal to  $\frac{1}{4}$  (0x40000000)
- L: 32-bit fixed point register. Contains the lower bound of the interval
- R: 32-bit fixed point register. Contains the range of the interval.
- V: 32-bit fixed point register. Contains the value of the arithmetic code. V is always larger than or equal to L and smaller than L+R.
- p0: 16-bit fixed point register. Probability of the '0' symbol.
- p1: 16-bit fixed point register. Probability of the '1' symbol.
- LPS: boolean. Value of the least probable symbol ('0' or '1').
- bit: boolean. Value of the decoded symbol.
- pLPS: 16-bit fixed point register. Probability of the LPS.
- rLPS: 32-bit fixed point register. Range corresponding to the LPS.

### 7.5.3.2 Bit stuffing

In order to avoid start code emulation, 1's are stuffed into the bitstream whenever there are too many successive 0's. If the first MAX\_HEADING bits are 0's, then a 1 is transmitted after the MAX\_HEADING-th 0. If MAX\_MIDDLE or more 0's are sent successively a 1 is inserted after the MAX\_MIDDLE-th 0. If the number of trailing 0's is larger than MAX\_TRAILING, then a 1 is appended to the stream. The decoder shall properly skip these inserted 1's when reading data into the V register (see subclauses 7.5.3.3 and 7.5.3.5).

MAX\_HEADING equals 3, MAX\_MIDDLE equals 10, and MAX\_TRAILING equals 2.

### 7.5.3.3 Initialization

The lower bound L is set to 0, the range R to HALF-0x1 (0x7fffff) and the first 31 bits are read in register V.

### 7.5.3.4 Decoding a symbol

When decoding a symbol, the probability p0 of the '0' symbol is provided according to the context computed in subclause 7.5.2.5.1 and using Table B-32. p0 uses a 16-bit fixed-point number representation. Since the decoder is binary, the probability of the '1' symbol is defined to be 1 minus the probability of the '0' symbol, i.e. p1 = 1-p0.

The least probable symbol LPS is defined as the symbol with the lowest probability. If both probabilities are equal to  $\frac{1}{2}$  (0x8000), the '0' symbol is considered to be the least probable.

The range rLPS associated with the LPS may simply be computed as R\*pLPS: The 16 most significant bits of register R are multiplied by the 16 bits of pLPS to obtain the 32 bit rLPS number.

The interval  $[L, L+R]$  is split into two intervals  $[L, L+R-rLPS]$  and  $[L+R-rLPS, L+R]$ . If V is in the latter interval then the decoded symbol is equal to LPS. Otherwise the decoded symbol is the opposite of LPS. The interval  $[L, L+R]$  is then reduced to the subinterval in which V lies.

After the new interval has been computed, the new range R might be smaller than QUARTER. If so, re-normalization is carried out, as described below.

### 7.5.3.5 Re-normalization

As long as R is smaller than QUARTER, re-normalization is performed.

- If the interval  $[L, L+R]$  is within  $[0, HALF]$ , the interval is scaled to  $[2L, 2L+2R]$ . V is scaled to  $2V$ .
- If the interval  $[L, L+R]$  is within  $[HALF, 1]$  the interval is scaled to  $[2(L-HALF), 2(L-HALF)+2R]$ . V is scaled to  $2(V-HALF)$ .
- Otherwise the interval is scaled to  $[2(L-QUARTER), 2(L-QUARTER)+2R]$ . V is scaled to  $2(V-QUARTER)$ .

After each scaling, a bit is read and copied into the least significant bit of register V.

### 7.5.3.6 Termination

After the last symbol has been decoded, additional bits need to be “consumed”. They were introduced by the encoder to guarantee decodability.

In general 3 further bits need to be read. However, in some cases, only two bits need to be read. These cases are defined by:

- if the current interval covers entirely [QUARTER-0x1, HALF)
- if the current interval covers entirely [HALF-0x1, 3QUARTER)

After these additional bits have been read, 32 bits shall be “unread”, i.e. put the content of register V back into the bit buffer.

### 7.5.3.7 Software

The example software for arithmetic decoding for binary shape decoding is included in annex B.

### 7.5.4 Grayscale Shape Decoding

Grayscale alpha plane decoding is achieved by the separate decoding of a support region and the values of the alpha channel. The support region is transmitted by using the binary shape as described above. The alpha values are transmitted as texture data with arbitrary shape, using almost the same coding method as is used for the luminance texture channel.

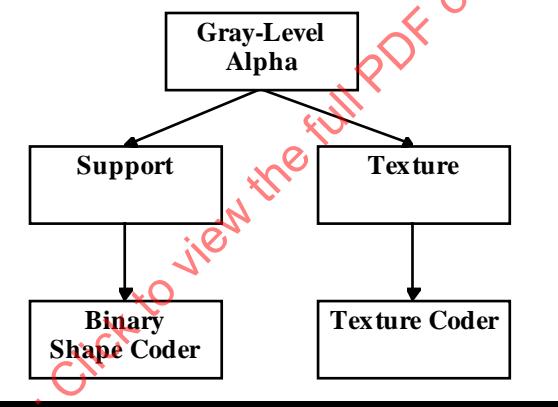


Figure 7-15 -- Grayscale shape coding

All samples which are indicated to be transparent by the binary shape data, must be set to zero in the decoded grayscale alpha plane. Within the VOP, alpha samples have the values produced by the grayscale alpha decoding process. Decoding of binary shape information is not dependent on the decoding of grayscale alpha. The alpha values are decoded into 16x16 macroblocks in the same way as the luminance channel (see subclauses 7.4 and 7.6). The 16x16 blocks of alpha values are referred to as alpha macroblocks hereafter. The data for each alpha macroblock is present in the bitstream immediately following the texture data for the corresponding texture macroblock. Any aspect of alpha decoding that is not covered in this document should be assumed to be the same as for the decoding of luminance.

#### 7.5.4.1 Grayscale Alpha COD Modes

When decoding grayscale alpha macroblocks, CODA is first encountered and indicates the coding status for alpha. It is important to understand that the macroblock syntax elements for alpha are still present in the bitstream for P or B macroblocks even if the texture syntax elements indicate “not-coded” (not\_coded=’1’). In this respect, the decoding of the alpha and texture data are independent. The only exception is for BVOPs when the colocated PVOP texture macroblock is skipped. In this case, no syntax is transmitted for texture or grayscale alpha, as both types of macroblock are skipped.

For macroblocks which are completely transparent (indicated by the binary shape coding), no alpha syntax elements are present and the grayscale alpha samples must all be set to zero (transparent). If CODA="all opaque" (I, P or B macroblocks) or CODA="not coded" (P or B macroblocks) then no more alpha data is present. Otherwise, other alpha syntax elements follow, including the coded block pattern (cbpa), followed by alpha texture data for those 8x8 blocks which are coded and non-transparent, as is the case for regular luminance macroblock texture data.

When CODA="all opaque", the corresponding decoded alpha macroblock is filled with a constant value of 255. This value will be called AlphaOpaqueValue.

#### 7.5.4.2 Alpha Plane Scale Factor

For both binary and grayscale shape, the VOP header syntax element "vop\_constant\_alpha" can be used to scale the alpha plane. If this bit is equal to '1', then each pixel in the decoded VOP is scaled before output, using vop\_constant\_alpha\_value. The scaling formula is:

$$\text{scaled\_pixel} = (\text{original\_pixel} * (\text{vop\_constant\_alpha\_value} + 1)) / 256$$

Scaling is applied at the output of the decoder, such that the decoded original values, not the scaled values are used as the source for motion compensation.

#### 7.5.4.3 Gray Scale Quantiser

When no\_gray\_quant\_update is equal to "1", the grayscale alpha quantiser is fixed for all macroblocks to the value indicated by vop\_alpha\_quant. Otherwise, the grayscale quantiser is reset at each new macroblock to a value that depends on the current texture quantiser (after any update by dquant). The relation is:

$$\text{current_alpha_quant} = (\text{current_texture_quant} * \text{vop_alpha_quant}) / \text{vop_quant}$$

The resulting value of current\_alpha\_quant must then be clipped so that it never becomes less than 1.

#### 7.5.4.4 Intra Macroblocks

When the texture mb\_type indicates an intra macroblock in IVOps or PVOPs, the grayscale alpha data is also decoded using intra mode.

The intra dc value is decoded in the same way as for luminance, using the same non-linear transform to convert from alpha\_quant to DCScalarA. However, intra\_dc\_vlc\_thr is not used for alpha, and therefore AC coefficient VLCs are never used to code the differential intra dc coefficient.

DC prediction is used in the same way as for luminance. However, when coda\_i indicates that a macroblock is all opaque, a synthetic intra dc value is created for each block in the current macroblock so that adjacent macroblocks can correctly obtain intra dc prediction values. The synthetic intra dc value is given as:

$$\text{BlockIntraDC} = (((\text{AlphaOpaqueValue} * 8) + (\text{DcScalerA} \gg 1)) / \text{DcScalerA}) * \text{DcScalerA}$$

AlphaOpaqueValue is described in subclause 7.5.4.1.

The intra cbpa VLC makes use of the *inter* cbpy VLC table, but the intra alpha block DCT coefficients are decoded in the same manner as with luminance intra macroblocks.

#### 7.5.4.5 Inter Macroblocks and Motion Compensation

Motion compensation is carried out for PVOPs and BVOPs, using the 8x8 or 16x16 luminance motion vectors, in the same way as for luminance data, except that regular motion compensation is used instead of OBMC. Forward, backward, bidirectional and direct mode motion compensation are used for BVOPs. Where the luminance motion vectors are not present because the texture macroblock is skipped, the exact same style of non-coded motion compensation used for luminance is applied to the alpha data (but without OBMC). Note that this does not imply that the alpha macroblock is skipped, because an error signal to update the resulting motion compensated alpha macroblock may still be present if indicated by coda\_pb. When the colocated PVOP texture macroblock is skipped for BVOPs, then the alpha macroblock is assumed to be skipped with no syntax transmitted.

cbpa and the alpha inter DCT coefficients are decoded in the same way as with luminance cbpy and inter DCT coefficients

#### 7.5.4.6 Method to be used when blending with greyscale alpha signal

The following explains the blending method to be applied to the video object in the compositor, which is controlled by the composition\_method flag and the linear\_composition flag. The linear\_composition flag is informative only, and the decoder may ignore it and proceed as if it had the value 0. However, it is normative that the composition\_method flag be acted upon.

The descriptions below show the processing taking place in YUV space; note that the processing can of course be implemented in RGB space to obtain equivalent results.

##### composition\_method=0 (cross-fading)

If layer N, with an n-bit alpha signal, is overlaid over layer M to generate a new layer P, the composited Y, U, V and alpha values are:

$$\begin{aligned} \text{Pyuv} &= ((2^n-1 - \text{Nalpha}) * \text{Myuv} + (\text{Nalpha} * \text{Nyuv})) / (2^n-1) \\ \text{Palpha} &= (2^n-1) \end{aligned}$$

##### composition\_method=1 (Additive mixing)

If layer N, with an n-bit alpha signal, is overlaid over layer M to generate a new layer P, the composited Y, U, V and alpha values are:

$$\{ \text{Myuv} \quad \dots \quad \text{Nalpha} = 0$$

$$\begin{aligned} \text{Pyuv} &= \{ \\ &\quad \{ (\text{Myuv} - \text{BLACK}) - ((\text{Myuv} - \text{BLACK}) * \text{Nalpha}) / (2^n-1) + \text{Nyuv} \quad \dots \quad \text{Nalpha} > 0 \end{aligned}$$

(this is equivalent to  $\text{Pyuv} = \text{Myuv} * (1 - \text{alpha}) + \text{Nyuv}$ , taking account of black level and the fact that the video decoder does not produce an output in areas where  $\text{alpha}=0$ )

$$\text{Palpha} = \text{Nalpha} + \text{Malpha} - (\text{Nalpha} * \text{Malpha}) / (2^n-1)$$

where

BLACK is the common black value of foreground and background objects.

NOTE The compositor must convert foreground and background objects to the same black value and signal range before composition. The black level of each video object is specified by the video\_range bit in the video\_signal\_type field, or by the default value if the field is not present. (The RGB values of synthetic objects are specified in a range from 0 to 1, as described in ISO/IEC 14496-1).

- linear\_composition = 0: The compositing process is carried out using the video signal in the format from which it is produced by the video decoder, that is, without converting to linear signals. Note that because video signals are usually non-linear ("gamma-corrected"), the composition will be approximate.
- linear\_composition = 1: The compositing process is carried out using linear signals, so the output of the video decoder is converted to linear if it was originally in a non-linear form, as specified by the video\_signal\_type field. Note that the alpha signal is always linear, and therefore requires no conversion.

#### 7.6 Motion compensation decoding

In order to perform motion compensated prediction on a per VOP basis, a special padding technique, i.e. the macroblock-based repetitive padding, is applied for the reference VOP. The details of these techniques are described in the following subclauses.

Since a VOP may have arbitrary shape, and this shape can change from one instance to another, conventions are necessary to ensure the consistency of the motion compensation process.

The absolute (frame) coordinate system is used for referencing every VOP. At every given instance, a bounding rectangle that includes the shape of that VOP, as described in subclause 7.5, is defined. The left and top corner, in the absolute coordinates, of the bounding rectangle is decoded from VOP spatial reference. Thus, the motion vector for a particular feature inside a VOP, e.g. a macroblock, refers to the displacement of the feature in absolute coordinates. No alignment of VOP bounding rectangles at different time instances is performed.

In addition to the above motion compensation processing, three additional processes are supported, namely, unrestricted motion compensation, four MV motion compensation, and overlapped motion compensation. Note that in all three modes, macroblock-based padding of the arbitrarily shaped reference VOP is performed for motion compensation.

### 7.6.1 Padding process

The padding process defines the values of luminance and chrominance samples outside the VOP for prediction of arbitrarily shaped objects. Figure 7-16 shows a simplified diagram of this process.

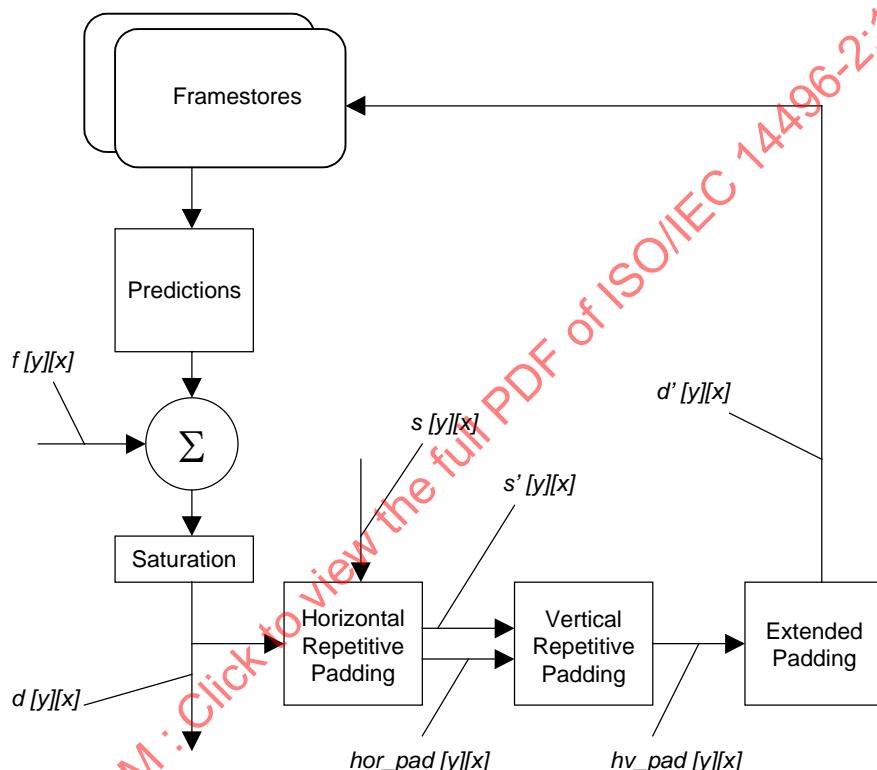


Figure 7-16 -- Simplified padding process

A decoded macroblock  $d[y][x]$  is padded by referring to the corresponding decoded shape block  $s[y][x]$ . The luminance component is padded per  $16 \times 16$  samples, while the chrominance components are padded per  $8 \times 8$  samples. A macroblock that lies on the VOP boundary (hereafter referred to as a boundary macroblock) is padded by replicating the boundary samples of the VOP towards the exterior. This process is divided into horizontal repetitive padding and vertical repetitive padding. The remaining macroblocks that are completely outside the VOP (hereafter referred to as exterior macroblocks) are filled by extended padding.

NOTE The padding process is applied to all macroblocks inside the bounding rectangle of a VOP. The bounding rectangle of the luminance component is defined by `vop_width` and `vop_height` extended to multiple of 16, while that of the chrominance components is defined by `(vop_width>>1)` and `(vop_height>>1)` extended to multiple of 8.

#### 7.6.1.1 Horizontal repetitive padding

Each sample at the boundary of a VOP is replicated horizontally to the left and/or right direction in order to fill the transparent region outside the VOP of a boundary macroblock. If there are two boundary sample values for filling a sample outside of a VOP, the two boundary samples are averaged ( $/2$ ).

`hor_pad[y][x]` is generated by any process equivalent to the following example. For every line with at least one shape sample  $s[y][x] == 1$  (inside the VOP) :

```

for (x=0; x<N; x++) {
  if (s[y][x] == 1) { hor_pad[y][x] = d[y][x]; s'[y][x] = 1; }
  else {
    if (s[y][x'] == 1 && s[y][x''] == 1) {
      hor_pad[y][x] = (d[y][x'] + d[y][x''])/2;
      s'[y][x] = 1;
    } else if (s[y][x'] == 1) {
      hor_pad[y][x] = d[y][x'];
      s'[y][x] = 1;
    } else if (s[y][x''] == 1) {
      hor_pad[y][x] = d[y][x''];
      s'[y][x] = 1;
    }
  }
}
}

```

where  $x'$  is the location of the nearest valid sample ( $s[y][x'] == 1$ ) at the VOP boundary to the left of the current location  $x$ ,  $x''$  is the location of the nearest boundary sample to the right, and  $N$  is the number of samples of a line in a macroblock.  $s'[y][x]$  is initialized to 0.

#### 7.6.1.2 Vertical repetitive padding

The remaining unfilled transparent horizontal samples (where  $s'[y][x] == 0$ ) from subclause 7.6.1.1 are padded by a similar process as the horizontal repetitive padding but in the *vertical* direction. The samples already filled in subclause 7.6.1.1 are treated as if they were inside the VOP for the purpose of this vertical pass.

$hv\_pad[y][x]$  is generated by any process equivalent to the following example. For every column of  $hor\_pad[y][x]$ :

```

for (y=0; y<M; y++) {
  if (s'[y][x] == 1)
    hv_pad[y][x] = hor_pad[y][x];
  else {
    if (s'[y'][x] == 1 && s'[y''][x] == 1)
      hv_pad[y][x] = (hor_pad[y'][x] + hor_pad[y''][x])/2;
    else if (s'[y'][x] == 1)
      hv_pad[y][x] = hor_pad[y'][x];
    else if (s'[y''][x] == 1)
      hv_pad[y][x] = hor_pad[y''][x];
  }
}

```


where  $y'$  is the location of the nearest valid sample ( $s'[y'][x] == 1$ ) above the current location  $y$  at the boundary of  $hv\_pad$ ,  $y''$  is the location of the nearest boundary sample below  $y$ , and  $M$  is the number of samples of a column in a macroblock.

#### 7.6.1.3 Extended padding

Exterior macroblocks immediately next to boundary macroblocks are filled by replicating the samples at the border of the boundary macroblocks. Note that the boundary macroblocks have been completely padded in subclause 7.6.1.1 and subclause 7.6.1.2. If an exterior macroblock is next to more than one boundary macroblocks, one of the macroblocks is chosen, according to the following convention, for reference.

The boundary macroblocks surrounding an exterior macroblock are numbered in priority according to Figure 7-17. The exterior macroblock is then padded by replicating upwards, downwards, leftwards, or rightwards the row of samples from the horizontal or vertical border of the boundary macroblock having the largest priority number.

The remaining exterior macroblocks (not located next to any boundary macroblocks) are filled with  $2^{\text{bits\_per\_pixel-1}}$ . For 8-bit luminance component and associated chrominance this implies filling with 128.

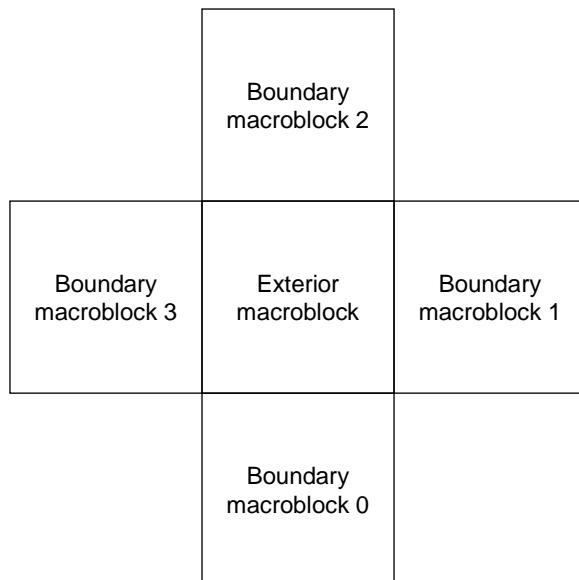

**Figure 7-17 -- Priority of boundary macroblocks surrounding an exterior macroblock**

#### 7.6.1.4 Padding for chrominance components

Chrominance components are padded according to subclauses 7.6.1.1 through 7.6.1.3 for each 8 x 8 block. The padding is performed by referring to a shape block generated by decimating the shape block of the corresponding luminance component. This decimating of the shape block is performed by the subsampling process described in subclause 6.1.3.6.

#### 7.6.1.5 Padding of interlaced macroblocks

Macroblocks of interlaced VOP (interlaced = 1) are padded according to subclauses 7.6.1.1 through 7.6.1.3. The vertical padding of the luminance component, however, is performed for each field independently. A sample outside of a VOP is therefore filled with the value of the nearest boundary sample of the same field. Completely transparent blocks are padded with  $2^{\text{bits_per_pixel}-1}$ . Chrominance components of interlaced VOP are padded according to subclause 7.6.1.4, however, based on fields to enhance subjective quality of display in 4:2:0 format. The padding method described in this subclause is not used outside the bounding rectangle of the VOP.

#### 7.6.1.6 Vector padding technique

The vector padding technique is applied to generate the vectors for the transparent blocks within a non-transparent macroblock, for an INTRA-coded macroblock and for a skipped macroblock. It works in a similar way as the horizontal followed by the vertical repetitive padding, and can be simply regarded as the repetitive padding performed on a 2x2 block except that the padded values are two dimensional vectors. A macroblock has four 8x8 luminance blocks, let  $\{\text{MVx}[i], \text{MVy}[i], i=0,1,2,3\}$  and  $\{\text{Transp}[i], i=0,1,2,3\}$  be the vectors and the transparencies of the four 8x8 blocks, respectively, the vector padding is any process numerically equivalent to:

```

if (the macroblock is INTRA-coded, skipped ) {
    MVx[0] = MVx[1] = MVx[2] = MVx[3] = 0
    MVy[0] = MVy[1] = MVy[2] = MVy[3] = 0
} else {
    if(Transp[0] == TRANSPARENT) {
        MVx[0]=(Transp[1] != TRANSPARENT) ? MVx[1] :((Transp[2]!=TRANSPARENT) ?
        MVx[2]:MVx[3]));
        MVy[0]=(Transp[1] != TRANSPARENT) ? MVy[1]:((Transp[2]!=TRANSPARENT) ?
        MVy[2]:MVy[3]));
    }
    if(Transp[1] == TRANSPARENT) {
        MVx[1]=(Transp[0] != TRANSPARENT) ? MVx[0] :((Transp[3]!=TRANSPARENT) ?
        MVx[3]:MVx[2]));
        MVy[1]=(Transp[0] != TRANSPARENT) ? MVy[0]:((Transp[3]!=TRANSPARENT) ?
        MVy[3]:MVy[2]));
    }
    if(Transp[2] == TRANSPARENT) {

```

```

MVx[2]=(Transp[3] != TRANSPARENT) ? MVx[3] :((Transp[0]!TRANSPARENT) ?
MVy[2]=(Transp[3] != TRANSPARENT) ? MVy[3]:(Transp[0]!TRANSPARENT) ?
}
if(Transp[3] == TRANSPARENT) {
  MVx[3]=(Transp[2] != TRANSPARENT) ? MVx[2] :((Transp[1]!TRANSPARENT) ?
  MVy[3]=(Transp[2] != TRANSPARENT) ? MVy[2]:(Transp[1]!TRANSPARENT) ?
}
}

MVx[0]:MVx[1]));
MVy[0]:MVy[1]));
MVx[1]:MVx[0]));
MVy[1]:MVy[0]));

```

Vector padding is only used in I- and P-VOPs, it is applied on a macroblock directly after it is decoded. The block vectors after padding are used in the P-VOP vector decoding and binary shape decoding, and in the B-VOP direct mode decoding.

### 7.6.2 Half sample interpolation

Pixel value interpolation for block matching when rounding is used corresponds to bilinear interpolation as depicted in Figure 7-18. The value of rounding\_control is defined using the vop\_rounding\_type bit in the VOP header (see subclause 6.3.5). Note that the samples outside the padded region cannot be used for interpolation.

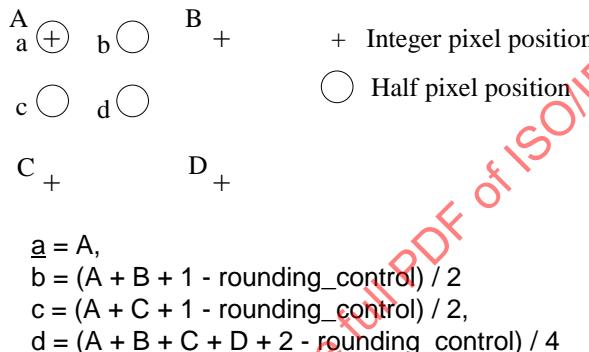


Figure 7-18 -- Interpolation scheme for half sample search

### 7.6.3 General motion vector decoding process

To decode a motion vector (MVx, MVy), the differential motion vector (MVDx, MVDy) is extracted from the bitstream by using the variable length decoding. Then it is added to a motion vector predictor (Px, Py) component wise to form the final motion vector. The general motion vector decoding process is any process that is equivalent to the following one. All calculations are carried out in halfpel units in the following. This process is generic in the sense that it is valid for the motion vector decoding in interlaced/progressive P- and B-VOPs except that the generation of the predictor (Px, Py) may be different.

```

r_size = vop_fcode - 1
f = 1 << r_size
high = (32 * f) - 1;
low = (-32 * f);
range = (64 * f);

if ( (f == 1) || (horizontal_mv_data == 0) )
  MVDx = horizontal_mv_data;
else {
  MVDx = ( (Abs(horizontal_mv_data) - 1) * f ) + horizontal_mv_residual + 1;
  if (horizontal_mv_data < 0)
    MVDx = - MVDx;
}

if ( (f == 1) || (vertical_mv_data == 0) )
  MVDy = vertical_mv_data;

```

```

else {
    MVDy = ( ( Abs(vertical_mv_data) - 1 ) * f ) + vertical_mv_residual + 1;
    if (vertical_mv_data < 0)
        MVDy = - MVDy;
}

MVx = Px + MVDx;
if ( MVx < low )
    MVx = MVx + range;
if (MVx > high)
    MVx = MVx - range;

MVy = Py + MVDy;
if ( MVy < low )
    MVy = MVy + range;
if (MVy > high)
    MVy = MVy - range;

```

The parameters in the bitstream shall be such that the components of the reconstructed differential motion vector,  $MVDx$  and  $MVDy$ , shall lie in the range  $[low:high]$ . In addition the components of the reconstructed motion vector,  $MVx$  and  $MVy$ , shall also lie in the range  $[low : high]$ . The allowed range  $[low : high]$  for the motion vectors depends on the parameter  $vop_fcode$ ; it is shown in Table 7-5.

The variables  $r\_size$ ,  $f$ ,  $MVDx$ ,  $MVDy$ ,  $high$ ,  $low$  and  $range$  are temporary variables that are not used in the remainder of this part of ISO/IEC 14496. The parameters  $horizontal\_mv\_data$ ,  $vertical\_mv\_data$ ,  $horizontal\_mv\_residual$  and  $vertical\_mv\_residual$  are parameters recovered from the bitstream.

The variable  $vop_fcode$  refers either to the parameter  $vop_fcode_forward$  or to the parameter  $vop_fcode_backward$  which have been recovered from the bitstream, depending on the respective prediction mode. In the case of P-VOP prediction only forward prediction applies. In the case of B-VOP prediction, forward as well as backward prediction may apply.

Table 7-5 -- Range for motion vectors


<b>vop_fcode_forward or vop_fcode_backward</b>	<b>motion vector range in halfsample units [low:high]</b>
1	[-32,31]
2	[-64,63]
3	[-128,127]
4	[-256,255]
5	[-512,511]
6	[-1024,1023]
7	[-2048,2047]

If the current macroblock is a field motion compensated macroblock, then the same prediction motion vector ( $Px$ ,  $Py$ ) is used for both field motion vectors. Because the vertical component of a field motion vector is integral, the vertical differential motion vector encoded in the bitstream is

$$MVy = MVDy_{field} + PY / 2$$

#### 7.6.4 Unrestricted motion compensation

Motion vectors are allowed to point outside the decoded area of a reference VOP when (and only when) the short video header format is not in use (i.e., when `short_video_header` is 0). For an arbitrary shape VOP, the decoded area refers to the area within the bounding rectangle, padded as described in subclause 7.6.1. A bounding rectangle is defined by `vop_width` and `vop_height` extended to multiple of 16. When a sample referenced by a motion vector stays outside the decoded VOP area, an edge sample is used. This edge sample is retrieved by limiting the motion vector to the last full pel position inside the decoded VOP area. Limitation of a motion vector is performed on a sample basis and separately for each component of the motion vector, as depicted in Figure 7-19.

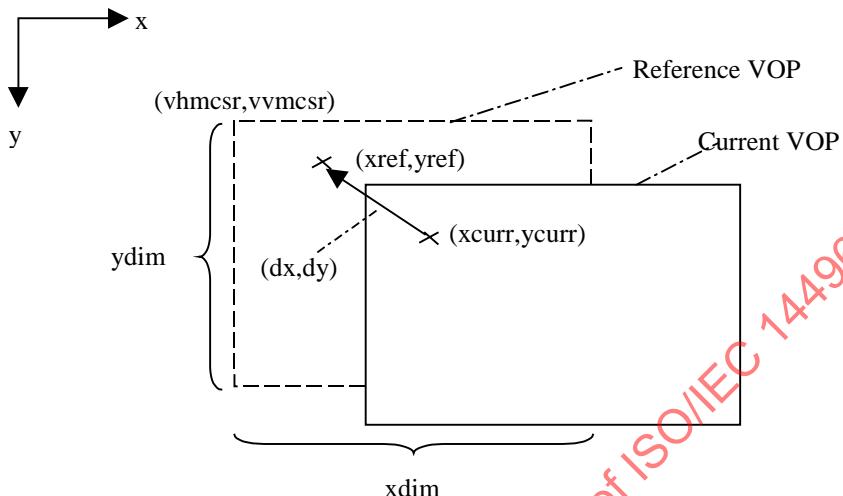

**Figure 7-19 -- Unrestricted motion compensation**

The coordinates of a reference sample in the reference VOP, ( $yref$ ,  $xref$ ) is determined as follows :

$$xref = \text{MIN} (\text{MAX} (xcurr+dx, vhmcstr), xdim+vhmcstr-1)$$


$$yref = \text{MIN} (\text{MAX} (ycurr+dy, vvmcstr), ydim+vvmcstr-1)$$

where  $vhmcstr = \text{vop\_horizontal\_mc\_spatial\_reference}$ ,  $vvmcstr = \text{vop\_vertical\_mc\_spatial\_reference}$ , ( $ycurr$ ,  $xcurr$ ) are the coordinates of a sample in the current VOP, ( $yref$ ,  $xref$ ) are the coordinates of a sample in the reference VOP, ( $dy$ ,  $dx$ ) is the motion vector, and ( $ydim$ ,  $xdim$ ) are the dimensions of the bounding rectangle of the reference VOP. All coordinates are related to the absolute coordinate system shown in Figure 7-19. Note that for rectangular VOP, a reference VOP is defined by `video_object_layer_width` and `video_object_layer_height`. For an arbitrary shape VOP, a reference VOP of luminance is defined by `vop_width` and `vop_height` extended to multiple of 16, while that of chrominance is defined by (`vop_width>>1`) and (`vop_height>>1`) extended to multiple of 8.

#### 7.6.5 Vector decoding processing and motion-compensation in progressive P-VOP

An inter-coded macroblock comprises either one motion vector for the complete macroblock or  $K$  ( $1 < K \leq 4$ ) motion vectors, one for each non-transparent 8x8 pel blocks forming the 16x16 pel macroblock, as is indicated by the `mcbpc` code.

For decoding a motion vector, the horizontal and vertical motion vector components are decoded differentially by using a prediction, which is formed by a median filtering of three vector candidate predictors (MV1, MV2, MV3) from the spatial neighbourhood macroblocks or blocks already decoded. The spatial position of candidate predictors for each block vector is depicted in Figure 7-20. In the case of only one motion vector present for the complete macroblock, the top-left case in Figure 7-20 is applied. When the short video header format is in use (i.e., when `short_video_header` is "1"), only one motion vector shall be present for a macroblock.

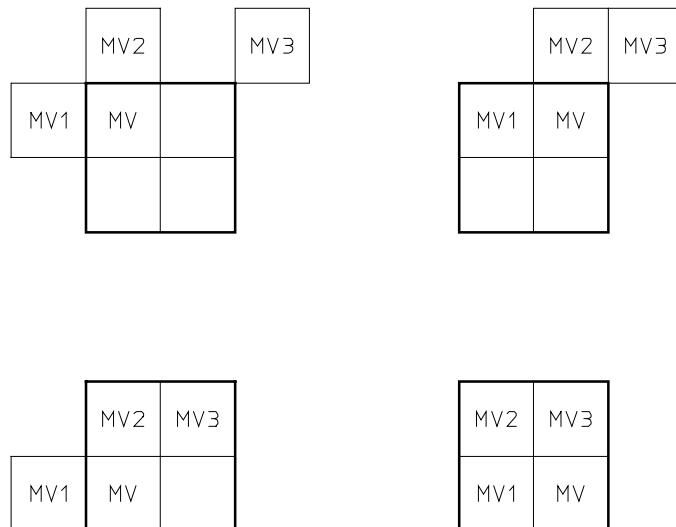

**Figure 7-20 -- Definition of the candidate predictors MV1, MV2 and MV3 for each of the luminance blocks in a macroblock**

The following four decision rules are applied to obtain the value of the three candidate predictors:

1. If a candidate predictor  $MV_i$  is in a transparent spatial neighbourhood macroblock or in a transparent block of the current macroblock it is not valid, otherwise, it is set to the corresponding block vector.
2. If one and only one candidate predictor is not valid, it is set to zero.
3. If two and only two candidate predictors are not valid, they are set to the third candidate predictor.
4. If all three candidate predictors are not valid, they are set to zero.

Note that any neighbourhood macroblock outside the current VOP or video packet or outside the current GOB (when `short_video_header` is "1") for which `gob_header_empty` is "0" is treated as transparent in the above sense. The median value of the three candidates for the same component is computed as predictor, denoted by  $P_x$  and  $P_y$ :

$$P_x = \text{Median}(MV1x, MV2x, MV3x)$$

$$P_y = \text{Median}(MV1y, MV2y, MV3y)$$

For instance, if  $MV1=(-2,3)$ ,  $MV2=(1,5)$  and  $MV3=(-1,7)$ , then  $P_x = -1$  and  $P_y = 5$ . The final motion vector is then obtained by using the general decoding process defined in the subclause 7.6.3.

If four vectors are used, each of the motion vectors is used for all pixels in one of the four luminance blocks in the macroblock. The numbering of the motion vectors is equivalent to the numbering of the four luminance blocks as given in Figure 6-5. Motion vector MVDCHR for both chrominance blocks is derived by calculating the sum of the  $K$  luminance vectors, that corresponds to  $K$  8x8 blocks that do not lie outside the VOP shape and dividing this sum by  $2^*K$ ; the component values of the resulting sixteenth/twelfth/eighth/fourth sample resolution vectors are modified towards the nearest half sample position as indicated below.

**Table 7-6 -- Modification of sixteenth sample resolution chrominance vector components**

sixteenth pixel position	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	//16
resulting position	0	0	0	1	1	1	1	1	1	1	1	1	1	1	2	2	//2

**Table 7-7 -- Modification of twelfth sample resolution chrominance vector components**

twelfth pixel position	0	1	2	3	4	5	6	7	8	9	10	11	//12
resulting position	0	0	0	1	1	1	1	1	1	1	2	2	//2

**Table 7-8 -- Modification of eighth sample resolution chrominance vector components**

eighth pixel position	0	1	2	3	4	5	6	7	//8
resulting position	0	0	1	1	1	1	1	2	//2

**Table 7-9 -- Modification of fourth sample resolution chrominance vector components**

fourth pixel position	0	1	2	3	//4
resulting position	0	1	1	1	//2

Half sample values are found using bilinear interpolation as described in subclause 7.6.2. The prediction for luminance is obtained by overlapped motion compensation as described in subclause 7.6.6 if indicated by `obmc_disable==0`. The prediction for chrominance is obtained by applying the motion vector `MVDCHR` to all pixels in the two chrominance blocks.

#### 7.6.6 Overlapped motion compensation

This subclause specifies the overlapped motion compensation process. This process is performed when the flag `obmc_disable=0`.

Each pixel in an 8\*8 luminance prediction block is a weighted sum of three prediction values, divided by 8 (with rounding). In order to obtain the three prediction values, three motion vectors are used: the motion vector of the current luminance block, and two out of four "remote" vectors:

- the motion vector of the block at the left or right side of the current luminance block;
- the motion vector of the block above or below the current luminance block.

For each pixel, the remote motion vectors of the blocks at the two nearest block borders are used. This means that for the upper half of the block the motion vector corresponding to the block above the current block is used, while for the lower half of the block the motion vector corresponding to the block below the current block is used. Similarly, for the left half of the block the motion vector corresponding to the block at the left side of the current block is used, while for the right half of the block the motion vector corresponding to the block at the right side of the current block is used.

The creation of each pixel,  $\bar{p}(i, j)$ , in an 8\*8 luminance prediction block is governed by the following equation:

$$\bar{p}(i, j) = (q(i, j) \times H_0(i, j) + r(i, j) \times H_1(i, j) + s(i, j) \times H_2(i, j) + 4) / 8,$$

where  $q(i, j)$ ,  $r(i, j)$ , and  $s(i, j)$  are the pixels from the referenced picture as defined by

$$q(i, j) = p(i + MV_x^0, j + MV_y^0),$$

$$r(i, j) = p(i + MV_x^1, j + MV_y^1),$$

$$s(i, j) = p(i + MV_x^2, j + MV_y^2).$$

Here,  $(MV_x^0, MV_y^0)$  denotes the motion vector for the current block,  $(MV_x^1, MV_y^1)$  denotes the motion vector of the block either above or below, and  $(MV_x^2, MV_y^2)$  denotes the motion vector either to the left or right of the current block as defined above.

The matrices  $H_0(i, j)$ ,  $H_1(i, j)$  and  $H_2(i, j)$  are defined in Figure 7-21, Figure 7-22, and Figure 7-23, where  $(i, j)$  denotes the column and row, respectively, of the matrix.

If one of the surrounding blocks was not coded, the corresponding remote motion vector is set to zero. If one of the surrounding blocks was coded in intra mode, the corresponding remote motion vector is replaced by the motion vector for the current block. If the current block is at the border of the VOP and therefore a surrounding block is not present, the corresponding remote motion vector is replaced by the current motion vector. In addition, if the current block is at the bottom of the macroblock, the remote motion vector corresponding with an 8\*8 luminance block in the macroblock below the current macroblock is replaced by the motion vector for the current block.

4	5	5	5	5	5	5	4
5	5	5	5	5	5	5	5
5	5	6	6	6	6	5	5
5	5	6	6	6	6	5	5
5	5	6	6	6	6	5	5
5	5	6	6	6	6	5	5
5	5	5	5	5	5	5	5
4	5	5	5	5	5	5	4

Figure 7-21 -- Weighting values,  $H_0$ , for prediction with motion vector of current luminance block

2	2	2	2	2	2	2	2
1	1	2	2	2	2	1	1
1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1
1	1	2	2	2	2	1	1
2	2	2	2	2	2	2	2

Figure 7-22 -- Weighting values,  $H_1$ , for prediction with motion vectors of the luminance blocks on top or bottom of current luminance block


2	1	1	1	1	1	1	1	2
2	2	1	1	1	1	1	2	2
2	2	1	1	1	1	1	2	2
2	2	1	1	1	1	1	2	2
2	2	1	1	1	1	1	2	2
2	2	1	1	1	1	1	2	2
2	2	1	1	1	1	1	2	2
2	1	1	1	1	1	1	1	2

**Figure 7-23 -- Weighting values,  $H_2$ , for prediction with motion vectors of the luminance blocks to the left or right of current luminance block**

#### 7.6.7 Temporal prediction structure

1. A forward reference VOP is defined as a most recently decoded I- or P-VOP in the past for which "vop\_coded==1". A backward reference VOP is defined as the most recently decoded I- or P-VOP in the future, regardless of its value for "vop\_coded".
2. A target P-VOP shall make reference to the forward reference VOP
3. A target B-VOP can make reference
  - to the forward and/or the backward reference VOP, if for the backward reference VOP "vop\_coded==1"
  - only to the forward reference VOP, if for the backward reference VOP "vop\_coded==0"
4. Note that for the reference VOP selection of binary shape coding the rules stated in subclause 7.5.2.4 shall be applied

The temporal prediction structure is depicted in Figure 7-24.

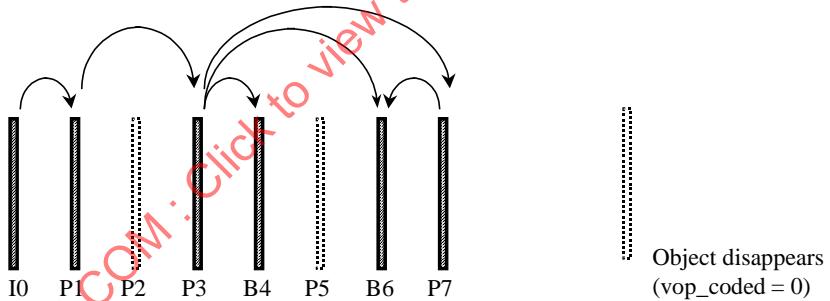

**Figure 7-24 -- Temporal Prediction Structure**

#### 7.6.8 Vector decoding process of non-scalable progressive B-VOPs

In B-VOPs there are three kinds of vectors, namely, 16x16 forward vector, 16x16 backward vector and the delta vector for the direct mode. The vectors are decoded with respect to the corresponding vector predictors. The basic decoding process of a differential vector is the exactly same as defined in P-VOPs except that for the delta vector of the direct mode the f\_code is always one. The vector is then reconstructed by adding the decoded differential vector to the corresponding vector predictor. The vector predictor for the delta vector is always set to zero, while the forward and backward vectors have their own vector predictors, which are reset to zero only at the beginning of each macroblock row. The vector predictors are updated in the following three cases:

- after decoding a macroblock of forward mode only the forward predictor is set to the decoded forward vector
- after decoding a macroblock of backward mode only the backward predictor is set to the decoded backward vector.
- after decoding a macroblock of bi-directional mode both the forward and backward predictors are updated separately with the decoded vectors of the same type (forward/backward).

### 7.6.9 Motion compensation in non-scalable progressive B-VOPs

In B-VOPs the overlapped motion compensation (OBMC) is not employed. The motion-compensated prediction of B-macroblock is generated by using the decoded vectors and taking reference to the padded forward/backward reference VOPs as defined below. Arbitrarily shaped reference VOPs shall be padded accordingly.

#### 7.6.9.1 Basic motion compensation procedure

All of the ISO/IEC 14496-2 motion compensation techniques are based on the formation of a prediction block,  $\text{pred}[i][j]$  of dimension (width, height), from a reference image,  $\text{ref}[x][y]$ . The coordinates of the current block (or macroblock) in the reference VOP is (x,y), the motion half-pel resolution motion vector is (dx\_halfpel, dy\_halfpel). The pseudo-code for this procedure is given below.

The `component_width()` and `component_height()` function give the coded VOP dimensions for the current component. For luminance, `component_width()` is `video_object_layer_width` for a rectangular VOP or `vop_width` otherwise rounded up to the next multiple of 16. The luminance `component_height()` is defined similarly. The chrominance dimensions are one half of the corresponding luminance dimension.

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999

```

clip_ref(ref, x, y)
{
    return(ref[MIN(MAX(x, 0), component_width(ref) - 1)]
           [MIN(MAX(y, 0), component_height(ref) - 1)]);
}

mc(pred,                                /* prediction block */
    ref,                                /* reference component */
    x, y,                                /* ref block coords for MV=(0, 0) */
    width, height,                         /* reference block dimensions */
    dx_halfpel, dy_halfpel,                /* half-pel resolution motion vector */
    rounding,                             /* rounding control (0 or 1) */
    pred_y0,                             /* field offset in pred blk (0 or 1) */
    ref_y0,                             /* field offset in ref blk (0 or 1) */
    y_incr)                             /* vertical increment (1 or 2) */

{
    dx = dx_halfpel >> 1;
    dy = y_incr * (dy_halfpel >> y_incr);
    if (dy_halfpel & y_incr) {
        if (dx_halfpel & 1) {
            for (iy = 0; iy < height; iy += y_incr) {
                for (ix = 0; ix < width; ix++) {
                    x_ref = x + dx + ix;
                    y_ref = y + dy + iy + ref_y0;
                    pred[ix][iy + pred_y0] =
                        (clip_ref(ref, x_ref + 0, y_ref + 0) +
                        clip_ref(ref, x_ref + 1, y_ref + 0) +
                        clip_ref(ref, x_ref + 0, y_ref + y_incr) +
                        clip_ref(ref, x_ref + 1, y_ref + y_incr) +
                        2 - rounding) >> 2;
                }
            }
        } else {
            for (iy = 0; iy < height; iy += y_incr) {
                for (ix = 0; ix < width; ix++) {
                    x_ref = x + dx + ix;
                    y_ref = y + dy + iy + ref_y0;
                    pred[ix][iy + pred_y0] =
                        (clip_ref(ref, x_ref, y_ref + 0) +
                        clip_ref(ref, x_ref, y_ref + y_incr) +
                        1 - rounding) >> 1;
                }
            }
        }
    } else {
        if (dx_halfpel & 1) {
            for (iy = 0; iy < height; iy += y_incr) {
                for (ix = 0; ix < width; ix++) {
                    x_ref = x + dx + ix;
                    y_ref = y + dy + iy + ref_y0;
                    pred[ix][iy + pred_y0] =
                        (clip_ref(ref, x_ref + 0, y_ref) +
                        clip_ref(ref, x_ref + 1, y_ref) +
                        1 - rounding) >> 1;
                }
            }
        } else {
            for (iy = 0; iy < height; iy += y_incr) {
                for (ix = 0; ix < width; ix++) {
                    x_ref = x + dx + ix;
                    y_ref = y + dy + iy + ref_y0;
                    pred[ix][iy + pred_y0] =
                        clip_ref(ref, x_ref, y_ref);
                }
            }
        }
    }
}

```

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999

### 7.6.9.2 Forward mode

Only the forward vector (MVFx,MVFy) is applied in this mode. The prediction blocks Pf\_Y, Pf\_U, and Pf\_V are generated from the forward reference VOP, ref\_Y\_for for luminance component and ref\_U\_for and ref\_V\_for for chrominance components, as follows:

```
mc(Pf_Y, ref_Y_for, x, y, 16, 16, MVFx, MVFy, 0, 0, 0, 1);
mc(Pf_U, ref_U_for, x/2, y/2, 8, 8, MVFx_chro, MVFy_chro, 0, 0, 0, 1);
mc(Pf_V, ref_V_for, x/2, y/2, 8, 8, MVFx_chro, MVFy_chro, 0, 0, 0, 1);
```

where (MVFx\_chro, MVFy\_chro) is motion vector derived from the luminance motion vector by dividing each component by 2 then rounding on a basis of Table 7-9. Here (and hereafter) the function MC is defined in subclause 7.6.9.

### 7.6.9.3 Backward mode

Only the backward vector (MVBx,MVBy) is applied in this mode. The prediction blocks Pb\_Y, Pb\_U, and Pb\_V are generated from the backward reference VOP, ref\_Y\_back for luminance component and ref\_U\_back and ref\_V\_back for chrominance components, as follows:

```
mc(Pb_Y, ref_Y_back, x, y, 16, 16, MVBx, MVBy, 0, 0, 0, 1);
mc(Pb_U, ref_U_back, x/2, y/2, 8, 8, MVBx_chro, MVBy_chro, 0, 0, 0, 1);
mc(Pb_V, ref_V_back, x/2, y/2, 8, 8, MVBx_chro, MVBy_chro, 0, 0, 0, 1);
```

where (MVBx\_chro, MVBy\_chro) is motion vector derived from the luminance motion vector by dividing each component by 2 then rounding on a basis of Table 7-9.

### 7.6.9.4 Bi-directional mode

Both the forward vector (MVFx,MVFy) and the backward vector (MVBx,MVBy) are applied in this mode. The prediction blocks Pi\_Y, Pi\_U, and Pi\_V are generated from the forward and backward reference VOPs by doing the forward prediction, the backward prediction and then averaging both predictions pixel by pixel as follows.

```
mc(Pf_Y, ref_Y_for, x, y, 16, 16, MVFx, MVFy, 0, 0, 0, 1);
mc(Pf_U, ref_U_for, x/2, y/2, 8, 8, MVFx_chro, MVFy_chro, 0, 0, 0, 1);
mc(Pf_V, ref_V_for, x/2, y/2, 8, 8, MVFx_chro, MVFy_chro, 0, 0, 0, 1);
mc(Pb_Y, ref_Y_back, x, y, 16, 16, MVBx, MVBy, 0, 0, 0, 1);
mc(Pb_U, ref_U_back, x/2, y/2, 8, 8, MVBx_chro, MVBy_chro, 0, 0, 0, 1);
mc(Pb_V, ref_V_back, x/2, y/2, 8, 8, MVBx_chro, MVBy_chro, 0, 0, 0, 1);
Pi_Y[i][j] = (Pf_Y[i][j] + Pb_Y[i][j] + 1) >> 1; i,j=0,1,2...15;
Pi_U[i][j] = (Pf_U[i][j] + Pb_U[i][j] + 1) >> 1; i,j=0,1,2...8;
Pi_V[i][j] = (Pf_V[i][j] + Pb_V[i][j] + 1) >> 1; i,j=0,1,2...8;
```

where (MVFx\_chro, MVFy\_chro) and (MVBx\_chro, MVBy\_chro) are motion vectors derived from the forward and backward luminance motion vectors by dividing each component by 2 then rounding on a basis of Table 7-9, respectively.

### 7.6.9.5 Direct mode

This mode uses direct bi-directional motion compensation derived by employing I- or P-VOP macroblock motion vectors and scaling them to derive forward and backward motion vectors for macroblocks in B-VOP. This is the only mode which makes it possible to use motion vectors on 8x8 blocks. Only one delta motion vector is allowed per macroblock.

#### 7.6.9.5.1 Formation of motion vectors for the direct mode

The direct mode utilises the motion vectors (MVs) of the co-located macroblock in the most recently decoded I- or P-VOP. The co-located macroblock is defined as the macroblock which has the same horizontal and vertical index with the current macroblock in the B-VOP. The MV vectors are the block vectors of the co-located macroblock after applying the vector padding defined in subclause 7.6.1.6. If the co-located macroblock is transparent and thus the MVs are not available, the direct mode is still enabled by setting MV vectors to zero vectors.

#### 7.6.9.5.2 Calculation of vectors

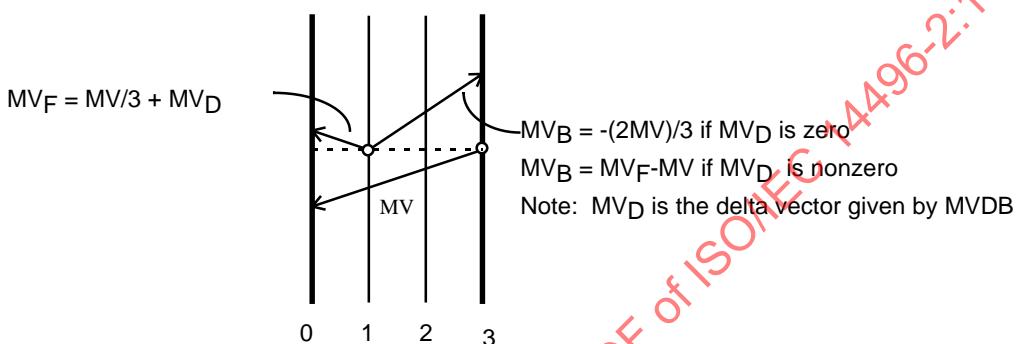


Figure 7-25 -- Direct Bi-directional Prediction

Figure 7-25 shows scaling of motion vectors. The calculation of forward and backward motion vectors involves linear scaling of the collocated block in temporally next I- or P-VOP, followed by correction by a delta vector (MV<sub>Dx</sub>, MV<sub>Dy</sub>). The forward and the backward motion vectors are  $\{(MV_{Fx}[i], MV_{Fy}[i]), (MV_{Bx}[i], MV_{By}[i]), i = 0, 1, 2, 3\}$  and are given in half sample units as follows.

$$MV_{Fx}[i] = (TRB \times MVx[i]) / TRD + MV_{Dx}$$

$$MV_{Bx}[i] = (MV_{Dx} == 0) ? ((TRB - TRD) \times MVx[i]) / TRD : MV_{Fx}[i] - MVx[i]$$

$$MV_{Fy}[i] = (TRB \times MVy[i]) / TRD + MV_{Dy}$$

$$MV_{By}[i] = (MV_{Dy} == 0) ? ((TRB - TRD) \times MVy[i]) / TRD : MV_{Fy}[i] - MVy[i]$$

$$i = 0, 1, 2, 3.$$

where  $\{(MVx[i], MVy[i]), i = 0, 1, 2, 3\}$  are the MV vectors of the co-located macroblock, TRD is the difference in temporal reference of the B-VOP and the previous reference VOP. TRD is the difference in temporal reference of the temporally next reference VOP with temporally previous reference VOP, assuming B-VOPs or skipped VOPs in between.

#### 7.6.9.5.3 Generation of prediction blocks

Motion compensation for luminance is performed individually on 8x8 blocks to generate a macroblock. The process of generating a prediction block simply consists of using computed forward and backward motion vectors  $\{(MV_{Fx}[i], MV_{Fy}[i]), (MV_{Bx}[i], MV_{By}[i]), i = 0, 1, 2, 3\}$  to obtain appropriate blocks from reference VOPs and averaging these blocks, same as the case of bi-directional mode except that motion compensation is performed on 8x8 blocks.

For the motion compensation of both chrominance blocks, the forward motion vector (MV<sub>Fx\_chro</sub>, MV<sub>Fy\_chro</sub>) is calculated by the sum of K forward luminance motion vectors dividing by 2K and then rounding toward the nearest half sample position as defined in Table 7-6 to Table 7-9. The backward motion vector (MV<sub>Bx\_chro</sub>, MV<sub>By\_chro</sub>) is

derived in the same way. The rest process is the same as the chrominance motion compensation of the bi-directional mode described in subclause 7.6.9.4.

#### 7.6.9.6 Motion compensation in skipped macroblocks

If the co-located macroblock in the most recently decoded I- or P-VOP is skipped, the current B-macroblock is treated as the forward mode with the zero motion vector (MVFX, MVFY). If the modb equals to '1' the current B-macroblock is reconstructed by using the direct mode with zero delta vector.

### 7.7 Interlaced video decoding

This subclause specifies the additional decoding process that a decoder shall perform to recover VOP data from the coded bitstream when the interlaced flag in the VOP header is set to "1". Interlaced information (subclause 6.3.6.3) specifies the method to decode bitstream of interlaced VOP.

#### 7.7.1 Field DCT and DC and AC Prediction

When *dct\_type* flag is set to '1' (field DCT coding), DCT coefficients of luminance data are formed such that each 8x8 block consists of data from one field as being shown in Figure 6-7. DC and optional AC (see "ac\_pred\_flag") prediction will be performed for a intra-coded macroblock. For the intra macroblocks which have *dct\_type* flag being set to "1", DC/AC prediction are performed to field blocks shown in Figure 7-26. After taking inverse DCT, all luminance blocks will be inverse permuted back to (frame) macroblock. Chrominance (block) data are not effected by *dct\_type* flag.

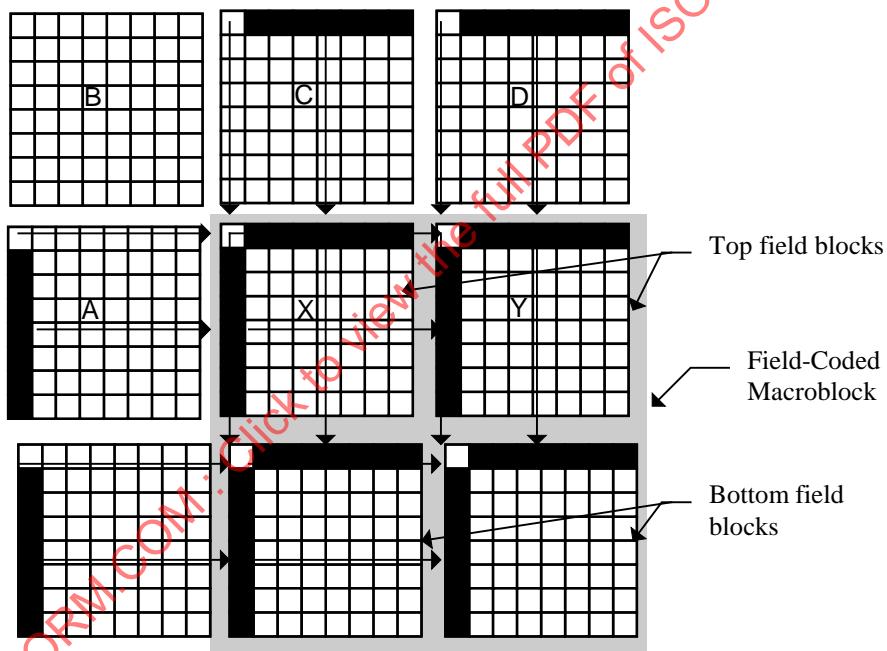


Figure 7-26 -- Previous neighboring blocks used in DC/AC prediction for interlaced intra blocks.

#### 7.7.2 Motion compensation

For non-intra macroblocks in P- and B-VOPs, motion vectors are extracted syntactically following subclause 6.2.6 "Macroblock". The motion vector decoding is performed separately on the horizontal and vertical components.

##### 7.7.2.1 Motion vector decoding in P-VOP

For each component of motion vector in P-VOPs, the median value of the candidate predictor vectors for the same component is computed and add to corresponding component of the motion vector difference obtained from the bitstream. To decode the motion vectors in a P-VOP, the decoder shall first extract the differential motion vectors  $(MVDx_{f1}, MVDy_{f1})$  and  $(MVDx_{f2}, MVDy_{f2})$  for top and bottom fields of a field predicted macroblock, respectively) by a use of variable length decoding and then determine the predictor vector from three candidate vectors. These candidate predictor vectors are generated from the three motion vectors of three spatial neighborhood decoded macroblocks or blocks as follows.

## CASE 1 :

If the current macroblock is a field predicted macroblock and none of the coded spatial neighborhood macroblocks is a field predicted macroblock, then candidate predictor vectors MV1, MV2, and MV3 are defined by Figure 7-27. If the candidate block  $i$  is not in four MV motion (8x8) mode, MV $i$  represents the motion vector for the macroblock. If the candidate block  $i$  is in four MV motion (8x8) mode, the 8x8 block motion vector closest to the upper left block of the current MB is used. The predictors for the horizontal and vertical components are then computed by

$$P_x = \text{Median}(MV1x, MV2x, MV3x)$$

$$P_y = \text{Median}(MV1y, MV2y, MV3y).$$

For differential motion vectors both fields use the same predictor and motion vectors are recovered by

$$MVx_{f1} = MVDx_{f1} + P_x$$

$$MVy_{f1} = 2 * (MVDy_{f1} + (P_y / 2))$$

$$MVx_{f2} = MVDx_{f2} + P_x$$

$$MVy_{f2} = 2 * (MVDy_{f2} + (P_y / 2))$$

where “/” is integer division with truncation toward 0. Note that all motion vectors described above are specified as integers with one LSB representing a half-pel displacement. The vertical component of field motion vectors always even (in half-pel frame coordinates). Vertical half-pel interpolation between adjacent lines of the same field is denoted by  $MVy_{fi}$  be an odd multiple of 2 (e.g. -2,2,6,..) No vertical interpolation is needed when  $MVy_{fi}$  is an multiple of 4 (it is a full pel value).

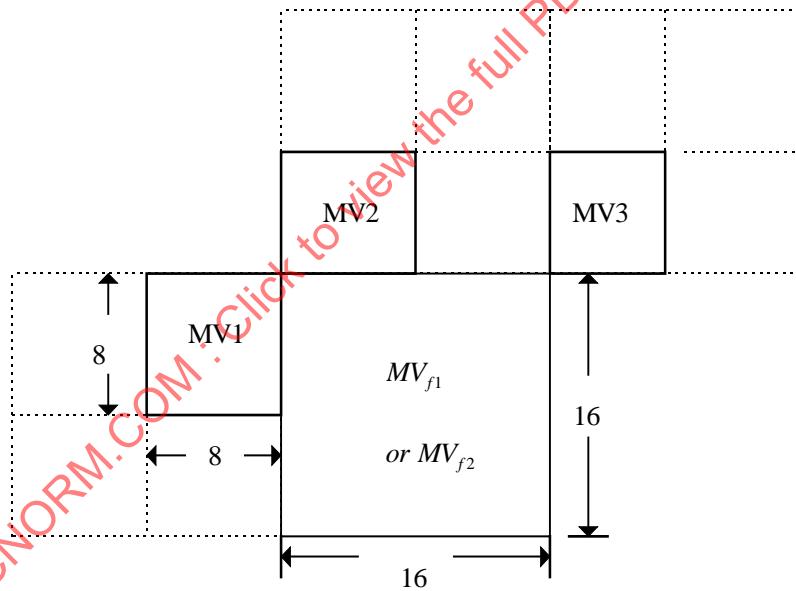


Figure 7-27 -- Example of motion vector prediction for field predicted macroblocks (Case1)

## CASE 2 :

If the current macroblock or block is frame predicted macroblock or block and if at least one of the coded spatial neighborhood macroblocks is a field predicted macroblock, then the candidate predictor vector for each field predicted macroblock will be generated by averaging two field motion vectors such that all fractional pel offsets are mapped into the half-pel displacement. Each component ( $P_x$  or  $P_y$ ) of the final predictor vector is the median value of the candidate predictor vectors for the same component. The motion vector is recovered by

$$MVx = MVDx + P_x$$


$$MVy = MVDy + P_y.$$

where

$$P_x = \text{Median}(MV1x, \text{Div2Round}(MVx_{f1} + MVx_{f2}), MV3x),$$

$$P_y = \text{Median}(MV1y, \text{Div2Round}(MVy_{f1} + MVy_{f2}), MV3y),$$

$\text{Div2Round}(x)$  is defined as follows:  $\text{Div2Round}(x) = (x >> 1) / (x \& 1)$ .

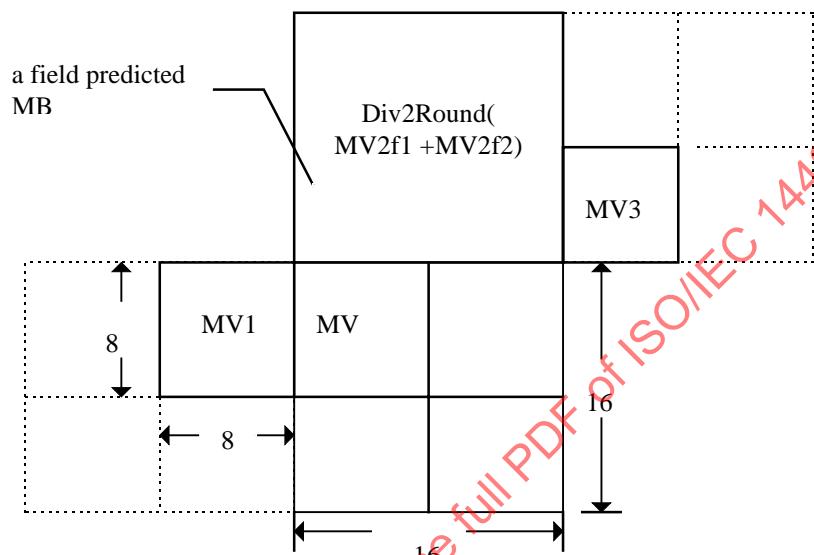

**Figure 7-28 -- Example of motion vector prediction for field predicted macroblocks (Case 2)**

CASE 3 :

Assume that the current macroblock is a field predicted macroblock and at least one of the coded spatial neighborhood macroblocks is a field predicted macroblock. If the candidate block  $i$  is field predicted, the candidate predictor vector  $MVi$  will be generated by averaging two field motion vectors such that all fractional pel offsets are mapped into the half-pel displacement as described in CASE 2. If the candidate block  $i$  is neither in four MV motion (8x8) mode nor in field prediction mode,  $MVi$  represents the frame motion vector for the macroblock. If the candidate block  $i$  is in four MV motion (8x8) mode, the 8x8 block motion vector closest to the upper left block of the current MB is used. The predictors for the horizontal and vertical components are then computed by

$$P_x = \text{Median}(MV1x, MV2x, MV3x)$$

$$P_y = \text{Median}(MV1y, MV2y, MV3y)$$

where

$$MVi x = \text{Div2Round}(MVx_{f1} + MVx_{f2}),$$

$$MVi y = \text{Div2Round}(MVy_{f1} + MVy_{f2}),$$

for some  $i$  in {1,2,3}.

For differential motion vectors both fields use the same predictor and motion vectors are recovered by (see both Figure 7-27 and Figure 7-28)

$$\begin{aligned}
 MVx_{f1} &= MVDx_{f1} + P_x \\
 MVy_{f1} &= 2 * (MVDy_{f1} + (P_y / 2)) \\
 MVx_{f2} &= MVDx_{f2} + P_x \\
 MVy_{f2} &= 2 * (MVDy_{f2} + (P_y / 2))
 \end{aligned}$$

The motion compensated prediction macroblock is calculated calling the “field\_compensate\_one\_reference” using the motion vectors calculated above. The top\_field\_ref, bottom\_field\_ref, and rounding type come directly from the syntax as forward\_top\_field\_reference, forward\_bottom\_field\_reference and vop\_rounding\_type respectively. The reference VOP is defined such the the even lines (0, 2, 4, ...) are the top field and the odd lines (1, 3, 5, ...) are the bottom field.

```

field_motion_compensate_one_reference(
    luma_pred, cb_pred, cr_pred, /* Prediction component pel array */
    luma_ref, cb_ref, cr_ref, /* Reference VOP pel arrays */
    mv_top_x, mv_top_y, /* top field motion vector */
    mv_bot_x, mv_bot_y, /* bottom field motion vector */
    top_field_ref, /* top field reference */
    bottom_field_ref, /* bottom field reference */
    x, y, /* current luma macroblock coords */
    rounding_type) /* rounding type */
{
    mc(luma_pred, luma_ref, x, y, 16, 16, mv_top_x, mv_top_y,
        rounding_type, 0, top_field_ref, 2);
    mc(luma_pred, luma_ref, x, y, 16, 16, mv_bot_x, mv_bot_y,
        rounding_type, 1, bottom_field_ref, 2);
    mc(cb_pred, cb_ref, x/2, y/2, 8, 8,
        Div2Round(mv_top_x), Div2Round(mv_top_y),
        rounding_type, 0, top_field_ref, 2);
    mc(cr_pred, cr_ref, x/2, y/2, 8, 8,
        Div2Round(mv_top_x), Div2Round(mv_top_y),
        rounding_type, 0, top_field_ref, 2);
    mc(cb_pred, cb_ref, x/2, y/2, 8, 8,
        Div2Round(mv_bot_x), Div2Round(mv_bot_y),
        rounding_type, 0, top_field_ref, 2);
    mc(cr_pred, cr_ref, x/2, y/2, 8, 8,
        Div2Round(mv_bot_x), Div2Round(mv_bot_y),
        rounding_type, 0, top_field_ref, 2);
}

```

In the case that obmc\_disable is “0”, the OBMC is not applied if the current MB is field-predicted. If the current MB is frame-predicted (including 8x8 mode) and some adjacent MBs are field-predicted, the motion vectors of those field-predicted MBs for OBMC are computed in the same manner as the candidate predictor vectors for field-predicted MBs are.

#### 7.7.2.2 Motion vector decoding in B-VOP

For interlaced B-VOPs, a macroblock can be coded using (1) direct coding, (2) 16x16 motion compensation (includes forward, backward & bidirectional modes), or (3) field motion compensation (includes forward, backward & bidirectional modes). Motion vector in half sample accuracy will be employed for a 16x16 macroblock being coded. Chrominance vectors are derived by scaling of luminance vectors using the rounding tables described in Table 7-9 (i.e. by applying *Div2Round* to the luminance motion vectors). These coding modes except direct coding mode allow switching of quantizer from the one previously in use. Specification of dquant, a differential quantizer involves a 2-bit overhead as discussed earlier. In direct coding mode, the quantizer value for previous coded macroblock is used.

For interlaced B-VOP motion vector predictors, four prediction motion vectors (PMVs) are used:

**Table 7-10 -- Prediction motion vector allocation for interlaced P-VOPs**

Function	PMV
Top field forward	0

Bottom field forward	1
Top field backward	2
Bottom field backward	3

These PMVs are used as follows for the different macroblock prediction modes:

**Table 7-11 -- Prediction motion vectors for interlaced B-VOP decoding**

Macroblock mode	PMVs used	PMVs updated
Direct	none	none
Frame forward	0	0,1
Frame backward	2	2,3
Frame bidirectional	0,2	0,1,2,3
Field forward	0,1	0,1
Field backward	2,3	2,3
Field bidirectional	0,1,2,3	0,1,2,3

The PMVs used by a macroblock are set to the value of current macroblock motion vectors after being used.

When a frame macroblock is decoded, the two field PMVs (top and bottom field) for each prediction direction are set to the same frame value. The PMVs are reset to zero at the beginning of each row of macroblocks. The predictors are not zeroed by skipped macroblocks or direct mode macroblocks.

The frame based motion compensation modes are described in subclause 7.6. The field motion compensation modes are calculated using the “field\_motion\_compensate\_one\_reference()” pseudo code function described above. The field forward mode is denoted by `mb_type == “0001”` and `field_prediction == “1”`. The PMV update and calculation of the motion compensated prediction is shown below. The `luma_fwd_ref_VOP[][], cb_fwd_ref_VOP[][], cr_fwd_ref_VOP[][]` denote the entire forward (past) anchor VOP pixel arrays. The coordinates of the upper left corner of the luminance macroblock is given by `(x, y)` and `MVD[]`.`x` and `MVD[]`.`y` denote an array of the motion vector differences in the order they occur in the bitstream for the current macroblock.

```

PMV[0].x = PMV[0].x + MVD[0].x;
PMV[0].y = 2 * (PMV[0].y / 2 + MVD[0].y);
PMV[1].x = PMV[1].x + MVD[1].x;
PMV[1].y = 2 * (PMV[1].y / 2 + MVD[1].y);
field_motion_compensate_one_reference(
    luma_pred, cb_pred, cr_pred,
    luma_fwd_ref_VOP, cb_fwd_ref_VOP, cr_fwd_ref_VOP,
    PMV[0].x, PMV[0].y, PMV[1].x, PMV[1].y,
    forward_top_field_reference,
    forward_bottom_field_reference,
    x, y, 0);

```

The field backward mode is denoted by `mb_type == “001”` and `field_prediction == “1”`. The PMV update and prediction calculation is outlined the following pseudo code. The `luma_bak_ref_VOP[][], cb_bak_ref_VOP[][], cr_bak_ref_VOP[][]` denote the entire backward (future) anchor VOP pixel arrays.

```

PMV[2].x = PMV[2].x + MVD[0].x;
PMV[2].y = 2 * (PMV[2].y / 2 + MVD[0].y);
PMV[3].x = PMV[1].x + MVD[1].x;
PMV[3].y = 2 * (PMV[3].y / 2 + MVD[1].y);
field_motion_compensate_one_reference(
    luma_pred, cb_pred, cr_pred,
    luma_bak_ref_VOP, cb_bak_ref_VOP, cr_bak_ref_VOP,
    PMV[2].x, PMV[2].y, PMV[3].x, PMV[3].y,
    forward_top_field_reference,
    forward_bottom_field_reference,
    x, y, 0);

```

```

luma_bak_ref_VOP, cb_bak_ref_VOP, cr_bak_ref_VOP,
PMV[2].x, PMV[2].y, PMV[3].x, PMV[3].y,
backward_top_field_reference,
backward_bottom_field_reference,
x, y, 0);

```

The bidirectional field prediction is used when `mb_type == "01"` and `field_prediction == "1"`. The prediction macroblock (in `luma_pred[][]`, `cb_pred[][]`, and `cr_pred[][]`) is calculated by:

```

for (mv = 0; mv < 4; mv++) {
    PMV[mv].x = PMV[mv].x + MVD[mv].x;
    PMV[mv].y = 2 * (PMV[mv].y / 2 + MVD[mv].y);
}
field_motion_compensate_one_reference(
    luma_pred_fwd, cb_pred_fwd, cr_pred_fwd,
    luma_fwd_ref_VOP, cb_fwd_ref_VOP, cr_fwd_ref_VOP,
    PMV[0].x, PMV[0].y, PMV[1].x, PMV[1].y,
    forward_top_field_reference,
    forward_bottom_field_reference,
    x, y, 0);
field_motion_compensate_one_reference(
    luma_pred_bak, cb_pred_bak, cr_pred_bak,
    luma_bak_ref_VOP, cb_bak_ref_VOP, cr_bak_ref_VOP,
    PMV[2].x, PMV[2].y, PMV[3].x, PMV[3].y,
    backward_top_field_reference,
    backward_bottom_field_reference,
    x, y, 0);
for (iy = 0; iy < 16; iy++) {
    for (ix = 0; ix < 16; ix++) {
        luma_pred[ix][iy] = (luma_pred_fwd[ix][iy] +
            luma_pred_bak[ix][iy] + 1) >> 1;
    }
}
for (iy = 0; iy < 8; iy++) {
    for (ix = 0; ix < 8; ix++) {
        cb_pred[ix][iy] = (cb_pred_fwd[ix][iy] +
            cb_pred_bak[ix][iy] + 1) >> 1;
        cr_pred[ix][iy] = (cr_pred_fwd[ix][iy] +
            cr_pred_bak[ix][iy] + 1) >> 1;
    }
}

```

The direct mode prediction can be either progressive (see subclause 7.6.9.5) or interlaced as described below. Interlaced direct mode is used when ever the co-located macroblock (macroblock with the same coordinates) of the future anchor VOP has `field_prediction` flag is "1". Note that if the future macroblock is skipped, or intra, the direct mode prediction is progressive. Otherwise, interlaced direct mode prediction is used.

Interlaced direct coding mode is an extension of progressive direct coding mode. Four derived field motion vectors are calculated from the forward field motion vectors of the co-located future anchor VOP, a single differential motion vector and the temporal position of the B-VOP fields with respect to the fields of the past and future anchor VOPs. The four derived field motion vectors are denoted `mvf[0]` (top field forward) `mvf[1]`, (bottom field forward), `mvb[0]` (top field backward), and `mvb[1]` (bottom field backward). `MV[i]` is the future anchor picture motion vector for the top (`i == 0`) and bottom (`i == 1`) fields. Only one delta motion vector (used for both field), `MVD[0]`, occurs in the bitstream for the field direct mode predicted macroblock. `MVD[0]` is decoded assuming `f_code == 1` regardless of the number in VOP header. The interlaced direct mode prediction (in `luma_pred[][]`, `cb_pred[][]` and `cr_pred[][]`) is calculated as shown below.

```

for (i = 0; i < 2; i++) {
    mvf[i].x = (TRB[i] * MV[i].x) / TRD[i] + MVD[0].x;
    mvf[i].y = (TRB[i] * MV[i].y) / TRD[i] + MVD[0].y;
    mvb[i].x = (MVD[i].x == 0) ?
        (((TRB[i] - TRD[i]) * MV[i].x) / TRD[i]) :


```

```

    mvf[i].x - MV[i].x);
mvb[i].y = (MVD[i].y == 0) ?
    (((TRB[i] - TRD[i]) * MV[i].y) / TRD[i]) :
    mvf[i].y - MV[i].y);
field_motion_compensate_one_reference(
    luma_pred_fwd, cb_pred_fwd, cr_pred_fwd,
    luma_fwd_ref_VOP, cb_fwd_ref_VOP, cr_fwd_ref_VOP,
    mvf[0].x, mvf[0].y, mvf[1].x, mvf[1].y,
    colocated_future_mb_top_field_reference,
    colocated_future_mb_bottom_field_reference,
    x, y, 0);
field_motion_compensate_one_reference(
    luma_pred_bak, cb_pred_bak, cr_pred_bak,
    luma_bak_ref_VOP, cb_bak_ref_VOP, cr_bak_ref_VOP,
    mvb[1].x, mvb[1].y, mvb[1].x, mvb[1].y,
    0, 1, x, y, 0);
for (iy = 0; iy < 16; iy++) {
    for (ix = 0; ix < 16; ix++) {
        luma_pred[ix][iy] = (luma_pred_fwd[ix][iy] +
                            luma_pred_bak[ix][iy] + 1) >> 1;
    }
}
for (iy = 0; iy < 8; iy++) {
    for (ix = 0; ix < 8; ix++) {
        cb_pred[ix][iy] = (cb_pred_fwd[ix][iy] +
                            cb_pred_bak[ix][iy] + 1) >> 1;
        cr_pred[ix][iy] = (cr_pred_fwd[ix][iy] +
                            cr_pred_bak[ix][iy] + 1) >> 1;
    }
}

```

The temporal references (TRB[i] and TRD[i]) are distances in time expressed in field periods. Figure 7-29 shows how they are defined for the case where  $i$  is 0 (top field of the B-VOP). The bottom field is analogously.

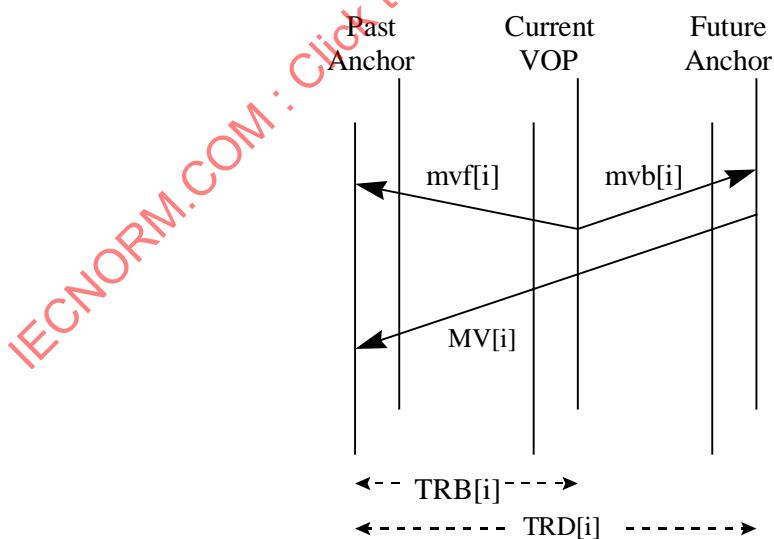

**Figure 7-29 -- Interlaced direct mode**

The calculation of  $TRD[i]$  and  $TRB[i]$  depends not only on the current field, reference field, and frame temporal references, but also on whether the current video is top field first or bottom field first.

$$TRD[i] = 2 * (T(future) / Tframe - T(past) / Tframe) + \delta[i]$$

$$TRB[i] = 2 * (T(current) // Tframe - T(past) // Tframe) + \delta[i]$$

where  $T(future)$ ,  $T(current)$  and  $T(past)$  are the cumulative VOP times calculated from `modulo_time_base` and `vop_time_increment` of the future, current and past VOPs in display order.  $Tframe$  is the frame period determined by

$$Tframe = T(first\_B\_VOP) - T(past\_anchor\_of\_first B\_VOP)$$

where `first_B_VOP` denotes the first B-VOP following the Video Object Layer syntax. The important thing about  $Tframe$  is that the period of time between consecutive fields which constitute an interlaced frame is assumed to be  $0.5 * Tframe$  for purposes of scaling the motion vectors.

The value of  $\delta$  is determined from Table 7-12; it is a function of the current field parity (top or bottom), the reference field of the co-located macroblock (macroblock at the same coordinates in the future anchor VOP), and the value of `top_field_first` in the B-VOP's video object plane syntax.

**Table 7-12 -- Selection of the parameter  $\delta$**

future anchor VOP reference fields of the co-located macroblock		top_field_first == 0		top_field_first == 1	
Top field reference	Bottom field reference	Top field, $\delta[0]$	Bottom field, $\delta[1]$	Top field, $\delta[0]$	Bottom field, $\delta[1]$
0	0	0	-1	0	1
0	1	0	0	0	0
1	0	1	-1	-1	1
1	1	1	0	-1	0

The top field prediction is based on the top field motion vector of the P-VOP macroblock of the future anchor picture. The past reference field is the reference field selected by the co-located macroblock of the future anchor picture for the top field. Analogously, the bottom field predictor is the average of pixels obtained from the future anchor's bottom field and the past anchor field referenced by the bottom field motion vector of the corresponding macroblock of the future anchor picture. When interlaced direct mode is used, `vop_time_increment_resolution` must be the smallest integer greater than or equal to the number of frames per second. In each VOP, `vop_time_increment` counts individual frames within a second.

## 7.8 Sprite decoding

The subclause specifies the additional decoding process for a sprite video object. The sprite decoding can operate in two modes: basic sprite decoding and low-latency sprite decoding. Figure 7-30 is a diagram of the sprite decoding process. It is simplified for clarity.

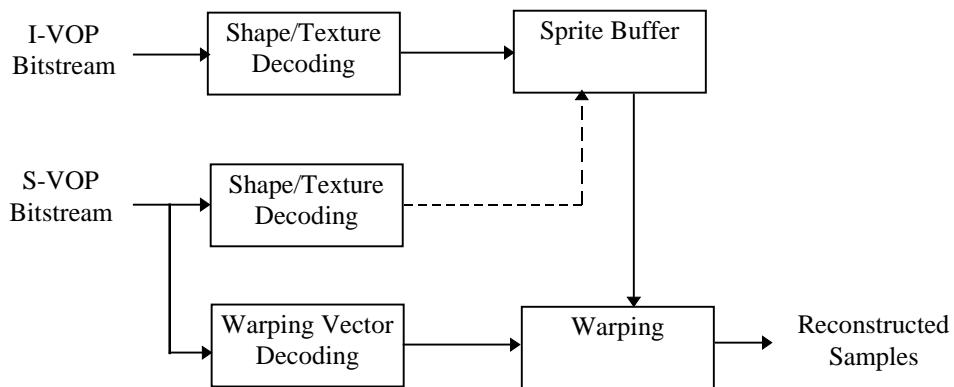


Figure 7-30 -- The sprite decoding process

### 7.8.1 Higher syntactic structures

The various parameters in the VOL and VOP bitstreams shall be interpreted as described in clause 6. When `sprite_enable == '1'`, `vop_coding_type` shall be "I" only for the initial VOP in a VOL for basic sprites (i.e. `low_latency_sprite_enable == '0'`), and all the other VOPs shall be S-VOPs (i.e. `vop_coding_type == "S"`). The reconstructed I-VOP in a VOL for basic sprites is not displayed but stored in a sprite memory, and will be used by all the remaining S-VOPs in the same VOL. An S-VOP is reconstructed by applying warping to the VOP stored in the sprite memory, using the warping parameters (i.e. a set of motion vectors) embedded in the VOP bitstream. Alternatively, in a VOL for low-latency sprites (i.e. `low_latency_sprite_enable == '1'`), these S-VOPs can update the information stored in the sprite memory before applying warping.

### 7.8.2 Sprite Reconstruction

The luminance, chrominance and grayscale alpha data of a sprite are stored in two-dimensional arrays. The width and height of the luminance array are specified by `sprite_width` and `sprite_height` respectively. The samples in the sprite luminance, chrominance and grayscale alpha arrays are addressed by two-dimensional integer pairs  $(i', j')$  and  $(i_c', j_c')$  as defined in the following:

- Top left luminance and grayscale alpha sample  
 $(i', j') = (\text{sprite\_left\_coordinate}, \text{sprite\_top\_coordinate})$
- Bottom right luminance and grayscale alpha sample  
 $(i', j') = (\text{sprite\_left\_coordinate} + \text{sprite\_width} - 1, \text{sprite\_top\_coordinate} + \text{sprite\_height} - 1)$
- Top left chrominance sample  
 $(i_c', j_c') = (\text{sprite\_left\_coordinate} / 2, \text{sprite\_top\_coordinate} / 2)$
- Bottom right chrominance sample  
 $(i_c', j_c') = (\text{sprite\_left\_coordinate} / 2 + \text{sprite\_width} / 2 - 1, \text{sprite\_top\_coordinate} / 2 + \text{sprite\_height} / 2 - 1)$ .

Likewise, the addresses of the luminance, chrominance and grayscale alpha samples of the VOP currently being decoded are defined in the following:

- Top left sample of luminance and grayscale alpha  
 $(i, j) = (0, 0)$  for rectangular VOPs, and  
 $(i, j) = (\text{vop\_horizontal\_mc\_spatial\_ref}, \text{vop\_vertical\_mc\_spatial\_ref})$  for non-rectangular VOPs
- Bottom right sample of luminance and grayscale alpha  
 $(i, j) = (\text{video\_object\_layer\_width} - 1, \text{video\_object\_layer\_height} - 1)$  for rectangular VOPs, and  
 $(i, j) = (\text{vop\_horizontal\_mc\_spatial\_ref} + \text{vop\_width} - 1, \text{vop\_vertical\_mc\_spatial\_ref} + \text{vop\_height} - 1)$  for non-rectangular VOPs
- Top left sample of chrominance  
 $(i_c, j_c) = (0, 0)$  for rectangular VOPs, and  
 $(i_c, j_c) = (\text{vop\_horizontal\_mc\_spatial\_ref} / 2, \text{vop\_vertical\_mc\_spatial\_ref} / 2)$  for non-rectangular VOPs
- Bottom right sample of chrominance  
 $(i_c, j_c) = (\text{video\_object\_layer\_width} / 2 - 1, \text{video\_object\_layer\_height} / 2 - 1)$  for rectangular VOPs, and  
 $(i_c, j_c) = (\text{vop\_horizontal\_mc\_spatial\_ref} / 2 + \text{vop\_width} / 2 - 1, \text{vop\_vertical\_mc\_spatial\_ref} / 2 + \text{vop\_height} / 2 - 1)$  for non-rectangular VOPs

### 7.8.3 Low-latency sprite reconstruction

This subclause allows a large static sprite to be reconstructed at the decoder by properly incorporating its corresponding pieces. There are two types of pieces recognized by the decoder—object and update. The decoded sprite object-piece (i.e., embedded in a S-VOP with `low_latency_sprite_enable==1` and `sprite_transmit_mode=="piece"`) is a highly quantized version of the original sprite piece while the sprite update-piece (i.e., `sprite_transmit_mode=="update"`) is a residual designed to improve upon the quality of decoded object-piece. Sprite pieces are rectangular pieces of texture (and shape for the object-piece) and can contain “holes,” corresponding to macroblocks, that do not need to be decoded. Five parameters are required by the decoder to properly incorporate the pieces: `piece_quant`, `piece_width`, `piece_height`, `piece_xoffset`, and `piece_yoffset`.

Macroblocks raster scanning is employed to decode each piece. However, whenever the scan encounters a macroblock which has been part of some previously sent sprite piece, then the macroblock is not decoded and its corresponding macroblock layer is empty. In that case, the decoder treats the macroblock as a hole in the current sprite piece. Since a macroblock can be refined as long as there is some available bandwidth, more than one update may be decoded per macroblock and the holes for a given refinement step have no relationship to the holes of later refinement steps. Therefore, the decoding process of a hole for an update piece is different than that for the object-piece. For the object-piece, no information is decoded at all and the decoder must “manage” where “holes” lie. (see subclause 7.8.3.1). For the update-piece, the `not_coded` bit is decoded to indicate whether or not one more refinement should be decoded for this given macroblock. (see subclause 7.8.3.2). Note that a hole could be non-transparent and have had shape information decoded previously. Multiple intermingled object-pieces and update-pieces may be decoded at the same current VOP. Part of a sequence could consist for example of rapidly showing a zooming out effect, a panning to the right, a zooming in, and finally a panning to the left. In this case, the first decoded object-piece covers regions on all four sides of the previous VOP transmitted piece, which is now treated as a hole and not decoded again. The second decoded object-piece relates to the right panning, and the third object-piece is a smaller left-panning piece due to the zooming-in effect. Finally, the last piece is different; instead of an object, it contains the update for some previous object-piece of zooming-in (thus, the need to update to refine for higher quality). All four pieces will be decoded within the same VOP. When `sprite_transmit_mode == "pause"`, the decoder recognizes that all sprite object-pieces and update-pieces for the current VOP session have been sent. However, when `sprite_transmit_mode == "stop"`, the decoder understands that all object and update-pieces have been sent for the entire video object layer, not just for the current VOP session. In addition, once all object-pieces or update-pieces have been decoded during a VOP session (i.e., signaled by `sprite_transmit_mode == "pause"` or `sprite_transmit_mode == "stop"`), the static sprite is padded (as defined in subclause 7.6.1), then the portion to be displayed is warped, to complete the current VOP session.

For the S-VOPs (i.e., `vop_coding_type == "S"`), the macroblock layer syntax of object-pieces is the same as those of I-VOP. Therefore, shape and texture are decoded using the macroblock layer structure in I-VOPs with the quantization of intra macroblocks. The syntax of the update-pieces is similar to the P-VOP inter-macroblock syntax with the quantization of non-intra macroblocks); however, the differences are indicated in Table B-1, specifically that there are no motion vectors and shape information included in this decoder syntax structure. In summary, this decoding process supports the construction of any large sprite image progressively, both spatially and in terms of quality.

#### 7.8.3.1 Decoding of holes in sprite object-piece

Implementation of macroblock scanning must account for the possibility that a macroblock uses prediction based on some macroblock sent in a previous piece. When an object-piece with holes is decoded, the decoder in the process of reconstruction acts as if the whole original piece were decoded, but actually only the bitstream corresponding to the “new macroblock” is received. Whenever macroblocks raster scanning encounters a hole, the decoder needs to manage the retrieval of relevant information (e.g. DCT quantization parameters, AC and DC prediction parameters, and BAB bordering values) from the corresponding macroblock decoded earlier.

#### 7.8.3.2 Decoding of holes in sprite update-pieces

In contrast to the `send_mb()` used by the object-pieces, the update-pieces use the `not_coded` bit. When `not_coded = 1` in the P-VOP syntax, the decoder recognizes that the corresponding macroblock is not refined by the current sprite update-piece. When `not_coded = 0` in the P-VOP syntax, the decoder recognizes that this macroblock is refined. The prediction for the update piece is obtained by extracting the “area” of the static sprite defined by (`piece_width`, `piece_height`, `piece_xoffset`, `piece_yoffset`). This area is then padded and serves as prediction for the update pieces. Since there is no shape information included in an update-piece, the result of its `transparent_mb()` is retrieved from the corresponding macroblock in the object-piece decoded earlier. In addition, an update macroblock

cannot be transmitted before its corresponding object macroblock. As a result, the very first sprite piece transmitted in the low-latency mode shall be an object-piece.

#### 7.8.4 Sprite reference point decoding

The syntactic elements in sprite\_trajectory () and below shall be interpreted as specified in clause 6. du[i] and dv[i] (0 <= i < no\_sprite\_point) specifies the mapping between indexes of some reference points in the VOP and the corresponding reference points in the sprite. These points are referred to as VOP reference points and sprite reference points respectively in the rest of the specification.

The index values for the VOP reference points are defined as:

$$\begin{aligned} (i_0, j_0) &= (0, 0) \text{ when } \text{video\_object\_layer\_shape} == \text{'rectangle'}, \text{ and} \\ &\quad (\text{vop\_horizontal\_mc\_spatial\_ref}, \text{vop\_vertical\_mc\_spatial\_ref}) \text{ otherwise,} \\ (i_1, j_1) &= (i_0 + W, j_0), \\ (i_2, j_2) &= (i_0, j_0 + H), \\ (i_3, j_3) &= (i_0 + W, j_0 + H) \end{aligned}$$

where  $W = \text{video\_object\_layer\_width}$  and  $H = \text{video\_object\_layer\_height}$  when  $\text{video\_object\_layer\_shape} == \text{'rectangle'}$  or  $W = \text{vop\_width}$  and  $H = \text{vop\_height}$  otherwise. Only the index values with subscripts less than no\_sprite\_point shall be used for the rest of the decoding process.

The index values for the sprite reference points shall be calculated as follows:

$$\begin{aligned} (i'_0, j'_0) &= (s / 2) (2 i_0 + du[0], 2 j_0 + dv[0]) \\ (i'_1, j'_1) &= (s / 2) (2 i_1 + du[1] + du[0], 2 j_1 + dv[1] + dv[0]) \\ (i'_2, j'_2) &= (s / 2) (2 i_2 + du[2] + du[0], 2 j_2 + dv[2] + dv[0]) \\ (i'_3, j'_3) &= (s / 2) (2 i_3 + du[3] + du[2] + du[1] + du[0], 2 j_3 + dv[3] + dv[2] + dv[1] + dv[0]) \end{aligned}$$

where  $i'_0, j'_0$ , etc are integers in  $\frac{1}{s}$  pel accuracy, where  $s$  is specified by sprite\_warping\_accuracy. Only the index values with subscripts less than no\_sprite\_point need to be calculated.

When no\_of\_sprite\_warping\_points == 2 or 3, the index values for the *virtual sprite points* are additionally calculated as follows:

$$\begin{aligned} (i''_0, j''_0) &= (16 (i_0 + W) + ((W - W) (r i'_0 - 16 i_0) + W' (r i'_1 - 16 i_1)) // W, \\ &\quad 16 j_0 + ((W - W) (r j'_0 - 16 j_0) + W' (r j'_1 - 16 j_1)) // W) \\ (i''_1, j''_1) &= (16 i_0 + ((H - H) (r i'_0 - 16 i_0) + H' (r i'_1 - 16 i_1)) // H, \\ &\quad 16 (j_0 + H) + ((H - H) (r j'_0 - 16 j_0) + H' (r j'_1 - 16 j_1)) // H) \end{aligned}$$

where  $i''_0, j''_0, i''_1$ , and  $j''_1$  are integers in  $\frac{1}{16}$  pel accuracy, and  $r = 16/s$ .  $W'$  and  $H'$  are defined as the smallest integers that satisfy the following condition:

$$W' = 2\alpha, H' = 2\beta, W' \geq W, H' \geq H, \alpha > 0, \beta > 0, \text{ both } \alpha \text{ and } \beta \text{ are integers.}$$

The calculation of  $i''_2$ , and  $j''_2$  is not necessary when no\_of\_sprite\_warping\_points == 2.

#### 7.8.5 Warping

For any pixel  $(i, j)$  inside the VOP boundary,  $(F(i, j), G(i, j))$  and  $(F_c(i_c, j_c), G_c(i_c, j_c))$  are computed as described in the following. These quantities are then used for sample reconstruction as specified in subclause 7.8.6. The following notations are used to simplify the description:

$$\begin{aligned} I &= i - i_0, \\ J &= j - j_0, \\ I_c &= 4 i_c - 2 i_0 + 1, \\ J_c &= 4 j_c - 2 j_0 + 1, \end{aligned}$$

When no\_of\_sprite\_warping\_point == 0,

$$\begin{aligned} (F(i, j), G(i, j)) &= (s i, s j), \\ (F_c(i_c, j_c), G_c(i_c, j_c)) &= (s i_c, s j_c). \end{aligned}$$

When no\_of\_sprite\_warping\_point == 1,

$$\begin{aligned} (F(i, j), G(i, j)) &= (i'_0 + sI, j'_0 + sJ), \\ (F_c(i_c, j_c), G_c(i_c, j_c)) &= i'_0 // 2 + s(i_c - i'_0 / 2), j'_0 // 2 + s(j_c - j'_0 / 2)). \end{aligned}$$

When no\_of\_sprite\_warping\_points == 2,

$$\begin{aligned} (F(i, j), G(i, j)) &= (i'_0 + ((-r i'_0 + i'_1) I + (r j'_0 - j'_1) J) // (W' r), \\ &\quad j'_0 + ((-r j'_0 + j'_1) I + (-r i'_0 + i'_1) J) // (W' r)), \\ (F_c(i_c, j_c), G_c(i_c, j_c)) &= (((-r i'_0 + i'_1) I_c + (r j'_0 - j'_1) J_c + 2 W' r i'_0 - 16 W') // (4 W' r), \\ &\quad ((-r j'_0 + j'_1) I_c + (-r i'_0 + i'_1) J_c + 2 W' r j'_0 - 16 W') // (4 W' r)). \end{aligned}$$

According to the definition of  $W'$  and  $H'$  (i.e.  $W' = 2^\alpha$  and  $H' = 2^\beta$ ), the divisions by “//” in these functions can be replaced by binary shift operations. By this replacement, the above equations can be rewritten as:

$$\begin{aligned} (F(i, j), G(i, j)) &= (i'_0 + (((-r i'_0 + i'_1) I + (r j'_0 - j'_1) J + 2^{\alpha+\rho-1}) >> (\alpha+\rho)), \\ &\quad j'_0 + (((-r j'_0 + j'_1) I + (-r i'_0 + i'_1) J + 2^{\alpha+\rho-1}) >> (\alpha+\rho)), \\ (F_c(i_c, j_c), G_c(i_c, j_c)) &= (((-r i'_0 + i'_1) I_c + (r j'_0 - j'_1) J_c + 2 W' r i'_0 - 16 W' + 2^{\alpha+\rho+1}) >> (\alpha+\rho+2), \\ &\quad ((-r j'_0 + j'_1) I_c + (-r i'_0 + i'_1) J_c + 2 W' r j'_0 - 16 W' + 2^{\alpha+\rho+1}) >> (\alpha+\rho+2)), \end{aligned}$$

where  $2^\rho = r$ .

When no\_of\_sprite\_warping\_points == 3,

$$\begin{aligned} (F(i, j), G(i, j)) &= (i'_0 + ((-r i'_0 + i'_1) H' I + (-r i'_0 + i'_2) W' J) // (W' H' r), \\ &\quad j'_0 + ((-r j'_0 + j'_1) H' I + (-r j'_0 + j'_2) W' J) // (W' H' r)), \\ (F_c(i_c, j_c), G_c(i_c, j_c)) &= (((-r i'_0 + i'_1) H' I_c + (-r i'_0 + i'_2) W' J_c + 2 W' H' r i'_0 - 16 W' H') // (4 W' H' r), \\ &\quad ((-r j'_0 + j'_1) H' I_c + (-r j'_0 + j'_2) W' J_c + 2 W' H' r j'_0 - 16 W' H') // (4 W' H' r)). \end{aligned}$$

According to the definition of  $W'$  and  $H'$ , the computation of these functions can be simplified by dividing the denominator and numerator of division beforehand by  $W'$  (when  $W' < H'$ ) or  $H'$  (when  $W' \geq H'$ ). As in the case of no\_of\_sprite\_warping\_points == 2, the divisions by “//” in these functions can be replaced by binary shift operations. For example, when  $W' \geq H'$  (i.e.  $\alpha \geq \beta$ ) the above equations can be rewritten as:

$$\begin{aligned} (F(i, j), G(i, j)) &= (i'_0 + (((-r i'_0 + i'_1) I + (-r i'_0 + i'_2) 2^{\alpha-\beta} J + 2^{\alpha+\rho-1}) >> (\alpha+\rho)), \\ &\quad j'_0 + (((-r j'_0 + j'_1) I + (-r j'_0 + j'_2) 2^{\alpha-\beta} J + 2^{\alpha+\rho-1}) >> (\alpha+\rho))), \\ (F_c(i_c, j_c), G_c(i_c, j_c)) &= (((-r i'_0 + i'_1) I_c + (-r i'_0 + i'_2) 2^{\alpha-\beta} J_c + 2 W' r i'_0 - 16 W' + 2^{\alpha+\rho+1}) >> (\alpha+\rho+2), \\ &\quad ((-r j'_0 + j'_1) I_c + (-r j'_0 + j'_2) 2^{\alpha-\beta} J_c + 2 W' r j'_0 - 16 W' + 2^{\alpha+\rho+1}) >> (\alpha+\rho+2)). \end{aligned}$$

When no\_of\_sprite\_warping\_point == 4,

$$\begin{aligned} (F(i, j), G(i, j)) &= ((a i + b j + c) // (g i + h j + D W H), \\ &\quad (d i + e j + f) // (g i + h j + D W H)), \\ (F_c(i_c, j_c), G_c(i_c, j_c)) &= ((2 a I_c + 2 b J_c + 4 c - (g I_c + h J_c + 2 D W H) s) // (4 g I_c + 4 h J_c + 8 D W H), \\ &\quad (2 d I_c + 2 e J_c + 4 f - (g I_c + h J_c + 2 D W H) s) // (4 g I_c + 4 h J_c + 8 D W H)) \end{aligned}$$

where

$$\begin{aligned} g &= ((i'_0 - i'_1 - i'_2 + i'_3) (j'_2 - j'_3) - (i'_1 - i'_3) (j'_0 - j'_1 - j'_2 + j'_3)) H, \\ h &= ((i'_1 - i'_3) (j'_0 - j'_1 - j'_2 + j'_3) - (i'_0 - i'_1 - i'_2 + i'_3) (j'_1 - j'_3)) W, \\ D &= (i'_1 - i'_3) (j'_2 - j'_3) - (i'_2 - i'_3) (j'_1 - j'_3), \\ a &= D (i'_1 - i'_0) H + g i'_1, \\ b &= D (i'_2 - i'_0) W + h I'_2, \\ c &= D i'_0 W H, \\ d &= D (j'_1 - j'_0) H + g j'_1, \\ e &= D (j'_2 - j'_0) W + h j'_2, \\ f &= D j'_0 W H. \end{aligned}$$

A set of parameters that causes the denominator of any of the the above equations to be zero for any pixel in a opaque or boundary macroblock is disallowed. The implementor should be aware that a 32bit register may not be

sufficient for representing the denominator or the numerator in the above transform functions for affine and perspective transform. The usage of a 64 bit floating point representation should be sufficient in such case.

### 7.8.6 Sample reconstruction

The reconstructed value  $Y$  of the luminance sample  $(i, j)$  in the currently decoded VOP shall be defined as

$$Y = ((s - r_j)((s - r_i) Y_{00} + r_i Y_{01}) + r_j ((s - r_i) Y_{10} + r_i Y_{11})) // s^2,$$

where  $Y_{00}$ ,  $Y_{01}$ ,  $Y_{10}$ ,  $Y_{11}$  represent the sprite luminance sample at  $(F(i, j)///s, G(i, j)///s)$ ,  $(F(i, j)///s + 1, G(i, j)///s)$ ,  $(F(i, j)///s, G(i, j)///s + 1)$ , and  $(F(i, j)///s + 1, G(i, j)///s + 1)$  respectively, and  $r_i = F(i, j) - (F(i, j)///s)s$  and  $r_j = G(i, j) - (G(i, j)///s)s$ . Figure 7-31 illustrates this process.

In case any of  $Y_{00}$ ,  $Y_{01}$ ,  $Y_{10}$  and  $Y_{11}$  lies outside the sprite luminance binary mask, it shall be obtained by the padding process as defined in subclause 7.6.1.

When `brightness_change_in_sprite == 1`, the final reconstructed luminance sample  $(i, j)$  is further computed as  $Y = Y^* (\text{brightness\_change\_factor} * 0.01 + 1)$ , clipped to the range of [0, 255].

Similarly, the reconstructed value  $C$  of the chrominance sample  $(i_c, j_c)$  in the currently decoded VOP shall be defined as

$$C = ((s - r_j)((s - r_i) C_{00} + r_i C_{01}) + r_j ((s - r_i) C_{10} + r_i C_{11})) // s^2,$$

where  $C_{00}$ ,  $C_{01}$ ,  $C_{10}$ ,  $C_{11}$  represent the sprite chrominance sample at  $(F_c(i_c, j_c)///s, G_c(i_c, j_c)///s)$ ,  $(F_c(i_c, j_c)///s + 1, G_c(i_c, j_c)///s)$ ,  $(F_c(i_c, j_c)///s, G_c(i_c, j_c)///s + 1)$ , and  $(F_c(i_c, j_c)///s + 1, G_c(i_c, j_c)///s + 1)$  respectively, and  $r_i = F_c(i_c, j_c) - (F_c(i_c, j_c)///s)s$  and  $r_j = G_c(i_c, j_c) - (G_c(i_c, j_c)///s)s$ . In case any of  $C_{00}$ ,  $C_{01}$ ,  $C_{10}$  and  $C_{11}$  lies outside the sprite chrominance binary mask, it shall be obtained by the padding process as defined in subclause 7.6.1.

The same method is used for the reconstruction of grayscale alpha and luminance samples. The reconstructed value  $A$  of the grayscale alpha sample  $(i, j)$  in the currently decoded VOP shall be defined as

$$A = ((s - r_j)((s - r_i) A_{00} + r_i A_{01}) + r_j ((s - r_i) A_{10} + r_i A_{11})) // s^2,$$

where  $A_{00}$ ,  $A_{01}$ ,  $A_{10}$ ,  $A_{11}$  represent the sprite grayscale alpha sample at  $(F(i, j)///s, G(i, j)///s)$ ,  $(F(i, j)///s + 1, G(i, j)///s)$ ,  $(F(i, j)///s, G(i, j)///s + 1)$ , and  $(F(i, j)///s + 1, G(i, j)///s + 1)$  respectively, and  $r_i = F(i, j) - (F(i, j)///s)s$  and  $r_j = G(i, j) - (G(i, j)///s)s$ . In case any of  $A_{00}$ ,  $A_{01}$ ,  $A_{10}$  and  $A_{11}$  lies outside the sprite luminance binary mask, it shall be obtained by the padding process as defined in subclause 7.6.1.

The reconstructed value of luminance binary mask sample  $BY(i, j)$  shall be computed following the identical process for the luminance sample. However, corresponding binary mask sample values shall be used in place of luminance samples  $Y_{00}$ ,  $Y_{01}$ ,  $Y_{10}$ ,  $Y_{11}$ . Assume the binary mask sample opaque is equal to 255 and the binary mask sample transparent is equal to 0. If the computed value is bigger or equal to 128,  $BY(i, j)$  is defined as opaque. Otherwise,  $BY(i, j)$  is defined as transparent. The chrominance binary mask samples shall be reconstructed by decimating of the corresponding 2 x 2 adjacent luminance binary mask samples as specified in subclause 7.6.1.4.

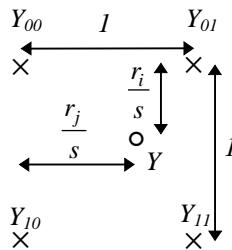



Figure 7-31 -- Pixel value interpolation (it is assumed that sprite samples are located on an integer grid)

### 7.9 Generalized scalable decoding

This subclause specifies the additional decoding process required for decoding scalable coded video.

The scalability framework is referred to as generalized scalability which includes the spatial and the temporal scalabilities. The temporal scalability offers scalability of the temporal resolution, and the spatial scalability offers scalability of the spatial resolution. Each type of scalability involves more than one layer. In the case of two layers, consisting of a lower layer and a higher layer; the lower layer is referred to as the base layer and the higher layer is called the enhancement layer.

In the case of temporal scalability, both rectangular VOPs as well as arbitrary shaped VOPs are supported. In the case of spatial scalability, only rectangular VOPs are supported. Figure 7-32 shows a high level decoder structure for generalized scalability.

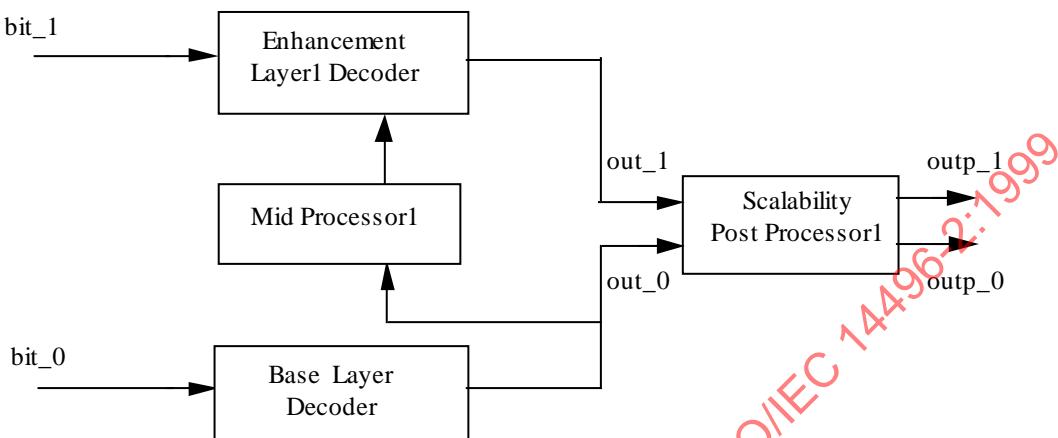

**Figure 7-32 -- High level decoder structure for generalized scalability**

The base layer and enhancement layer bitstreams are input for decoding by the corresponding base layer decoder and enhancement layer decoder.

When spatial scalability is to be performed, mid processor 1 performs spatial up or down sampling of input. The scalability post processor performs any necessary operations such as spatial up or down sampling of the decoded base layer for display resulting at outp\_0 while the enhancement layer without resolution conversion may be output as outp\_1.

When temporal scalability is to be performed, the decoding of base and enhancement layer bitstreams occurs in the corresponding base and enhancement layer decoders as shown. In this case, mid processor 1 does not perform any spatial resolution conversion. The post processor simply outputs the base layer VOPs without any conversion, but temporally multiplexes the base and enhancement layer VOPs to produce higher temporal resolution enhancement layer.

The reference VOPs for prediction are selected by ref\_select\_code as specified in Table 7-13 and Table 7-14. In coding of P-VOPs belonging to an enhancement layer, the forward reference is one of the following four: the most recently decoded VOP of enhancement layer, the most recent VOP of the reference layer in display order, the next VOP of the reference layer in display order, or the temporally coincident VOP in the reference layer.

In B-VOPs, the forward reference is one of the following two: the most recently decoded enhancement VOP or the most recent reference layer VOP in display order. The backward reference is one of the following three: the temporally coincident VOP in the reference layer, the most recent reference layer VOP in display order, or the next reference layer VOP in display order.

**Table 7-13 -- Prediction reference choices in enhancement layer P-VOPs for scalability**

ref_select_code	forward prediction reference
00	Most recently decoded enhancement VOP belonging to the same layer.
01	Most recently VOP in display order belonging to the reference layer.
10	Next VOP in display order belonging to the reference layer.
11	Temporally coincident VOP in the reference layer (no motion vectors)

**Table 7-14 -- Prediction reference choices in enhancement layer B-VOPs for scalability**


ref_select_code	forward temporal reference	backward temporal reference
00	Most recently decoded enhancement VOP of the same layer	Temporally coincident VOP in the reference layer (no motion vectors)
01	Most recently decoded enhancement VOP of the same layer.	Most recent VOP in display order belonging to the reference layer.
10	Most recently decoded enhancement VOP of the same layer.	Next VOP in display order belonging to the reference layer.
11	Most recently VOP in display order belonging to the reference layer.	Next VOP in display order belonging to the reference layer.

### 7.9.1 Temporal scalability

Temporal scalability involves two layers, a lower layer and an enhancement layer. Both the lower and the enhancement layers process the same spatial resolution. The enhancement layer enhances the temporal resolution of the lower layer and if temporally remultiplexed with the lower layer provides full temporal rate.

#### 7.9.1.1 Base layer and enhancement layer

In the case of temporal scalability, the decoded VOPs of the enhancement layer are used to increase the frame rate of the base layer. Figure 7-33 shows a simplified diagram of the motion compensation process for the enhancement layer using temporal scalability.

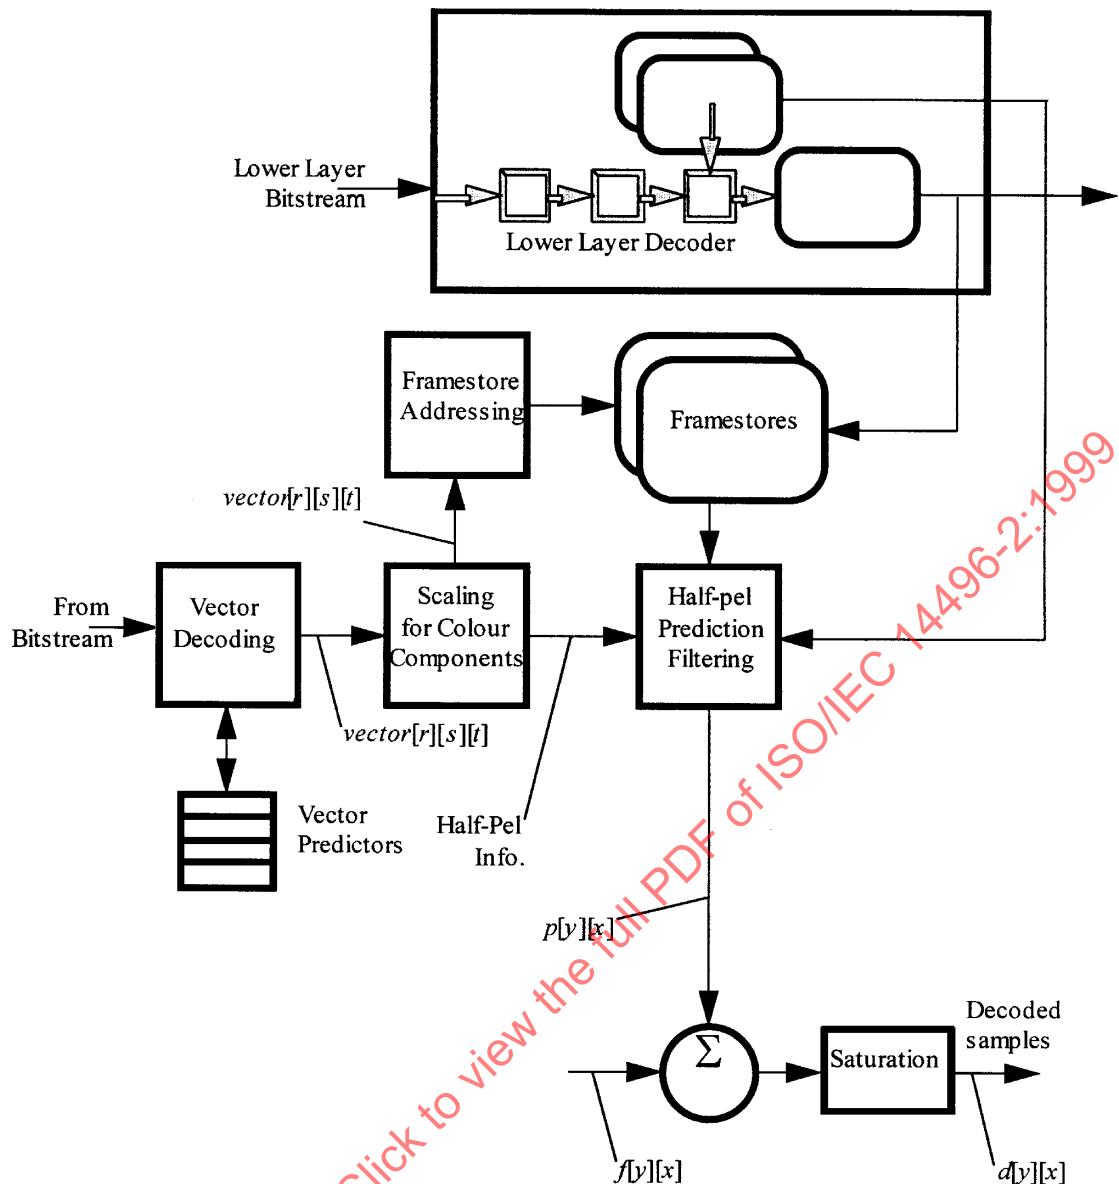

**Figure 7-33 -- Simplified motion compensation process for temporal scalability**

Predicted samples  $p[y][x]$  are formed either from frame stores of base layer or from frame stores of enhancement layer. The difference data samples  $f[y][x]$  are added to  $p[y][x]$  to form the decoded samples  $d[y][x]$ .

There are two types of enhancement structures indicated by the “enhancement\_type” flag. When the value of enhancement\_type is “1”, the enhancement layer increases the temporal resolution of a partial region of the base layer. When the value of enhancement\_type is “0”, the enhancement layer increases the temporal resolution of an entire region of the base layer.

### 7.9.1.2 Base layer

The decoding process of the base layer is the same as non-scalable decoding process.

### 7.9.1.3 Enhancement layer

The VOP of the enhancement layer is decoded as either I-VOP, P-VOP or B-VOP. The shape of the VOP is either rectangular (video\_object\_layer\_id is “00”) or arbitrary (video\_object\_layer\_id is “01”).

#### 7.9.1.3.1 Decoding of I-VOPs

The decoding process of I-VOPs in enhancement layer is the same as non-scalable decoding process.

### 7.9.1.3.2 Decoding of P-VOPs

The reference layer is indicated by `ref_layer_id` in Video Object Layer class. Other decoding process is the same as non-scalable P-VOPs except the process specified in subclauses 7.9.1.3.4 and 7.9.1.3.5.

For P-VOPs, the `ref_select_code` is either "00", "01" or "10".

When the value of `ref_select_code` is "00", the prediction reference is set by the most recently decoded VOP belonging to the same layer.

When the value of `ref_select_code` is "01", the prediction reference is set by the previous VOP in display order belonging to the reference layer.

When the value of `ref_select_code` is "10", the prediction reference is set by the next VOP in display order belonging to the reference layer.

### 7.9.1.3.3 Decoding of B-VOPs

The reference layer is indicated by `ref_layer_id` in Video Object Layer class. Other decoding process is the same as non-scalable B-VOPs except the process specified in subclauses 7.9.1.3.4 and 7.9.1.3.5.

For B-VOPs, the `ref_select_code` is either "01", "10" or "11".

When the value of `ref_select_code` is "01", the forward prediction reference is set by the most recently decoded VOP belonging to the same layer and the backward prediction reference is set by the previous VOP in display order belonging to the reference layer.

When the value of `ref_select_code` is "10", the forward prediction reference is set by the most recently decoded VOP belonging to the same layer, and the backward prediction reference is set by the next VOP in display order belonging to the reference layer.

When the value of `ref_select_code` is "11", the forward prediction reference is set by the previous VOP in display order belonging to the reference layer and the backward prediction reference is set by the next VOP in display order belonging to the reference layer. The picture type of the reference VOP shall be either I or P (`vop_coding_type` = "00" or "01").

When the value of `ref_select_code` is "01" or "10", direct mode is not allowed. `modb` shall always exist in each macroblock, i.e. the macroblock is not skipped even if the co-located macroblock is skipped.

### 7.9.1.3.4 Decoding of arbitrary shaped VOPs

Prediction for arbitrary shape in P-VOPs or in B-VOPs is same as the one in the base layer (see subclause 7.5.2.1.2).

For arbitrary shaped VOPs with the value of `enhancement_type` being "1", the shape of the reference VOP is defined as an all opaque rectangle whose size is the same as the reference layer when the shape of reference layer is rectangular (`video_object_layer_shape` = "00").

When the value of `ref_select_code` is "11" and the value of `enhancement_type` is "1", `modb` shall always exist in each macroblock, i.e. the macroblock is not skipped even if the co-located macroblock is skipped.

### 7.9.1.3.5 Decoding of backward and forward shape

Backward shape and forward shape are used in the background composition process specified in subclause 8.1. The backward shape is the shape of the enhanced object at the next VOP in display order belonging to the reference layer. The forward shape is the shape of the enhanced object at the previous VOP in display order belonging to the reference layer.

For the VOPs with the value of `enhancement_type` being "1", backward shape is decoded when the `load_backward_shape` is "1" and forward shape is decoded when `load_forward_shape` is "1".

When the value of load\_backward\_shape is "1" and the value of load\_forward\_shape is "0", the backward shape of the previous VOP is copied to the forward shape for the current VOP. When the value of load\_backward\_shape is "0", the backward shape of the previous VOP is copied to the backward shape for the current VOP and the forward shape of the previous VOP is copied to the forward shape for the current VOP.

The decoding process of backward and forward shape is the same as the decoding process for the shape of I-VOP with binary only mode (video\_object\_layer\_shape = "10").

## 7.9.2 Spatial scalability

### 7.9.2.1 Base Layer and Enhancement Layer

In the case of spatial scalability, the enhancement bitstream is used to increase the resolution of the image. When the output with lower resolution is required, only the base layer is decoded. When the output with higher resolution is required, both the base layer and the enhancement layer are decoded.

Figure 7-34 is a diagram of the video decoding process with spatial scalability.

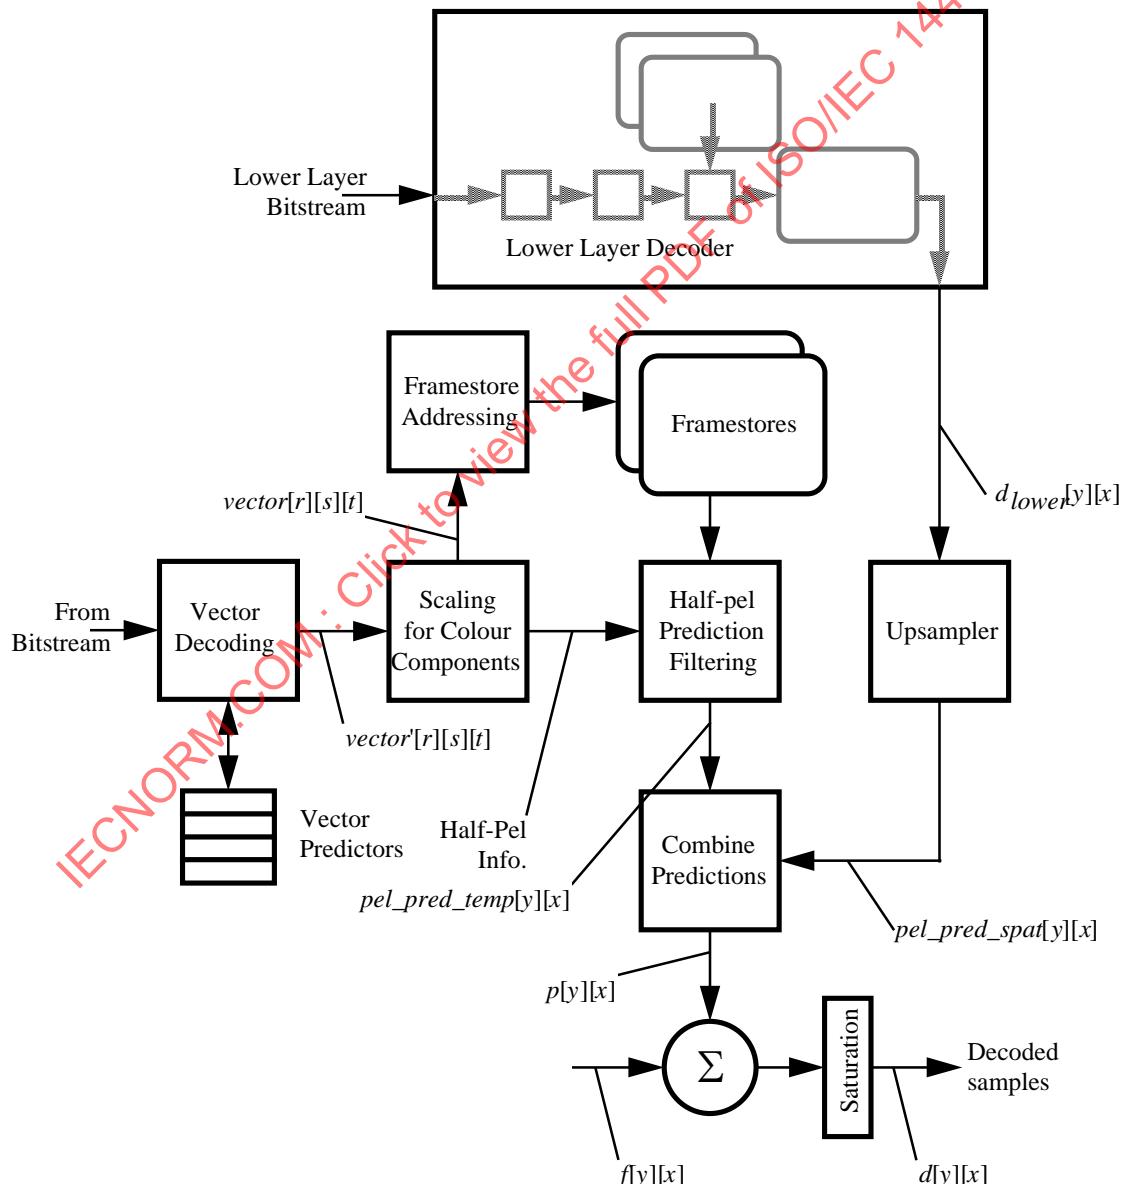


Figure 7-34 -- Simplified motion compensation process for spatial scalability

### 7.9.2.2 Decoding of Base Layer

The decoding process of the base layer is the same as nonscalable decoding process.

### 7.9.2.3 Prediction in the enhancement layer

A motion compensated temporal prediction is made from reference VOPs in the enhancement layer. In addition, a spatial prediction is formed from the lower layer decoded frame ( $d_{lower}[y][x]$ ). These predictions are selected individually or combined to form the actual prediction.

In the enhancement layer, the forward prediction in P-VOP and the backward prediction in B-VOP are used as the spatial prediction. The reference VOP is set to the temporally coincident VOP in the base layer. The forward prediction in B-VOP is used as the temporal prediction from the enhancement layer VOP. The reference VOP is set to the most recently decoded VOP of the enhancement layer. The interpolate prediction in B-VOP is the combination of these predictions.

In the case that a macroblock is not coded, either because the entire macroblock is skipped or the specific macroblock is not coded there is no coefficient data. In this case  $f[y][x]$  is zero, and the decoded samples are simply the prediction,  $p[y][x]$ .

### 7.9.2.4 Formation of spatial prediction

Forming the spatial prediction requires definition of the spatial resampling process. The formation is performed at the mid-processor. The resampling process is defined for a whole VOP, however, for decoding of a macroblock, only the 16x16 region in the upsampled VOP, which corresponds to the position of this macroblock, is needed.

The spatial prediction is made by resampling the lower layer reconstructed VOP to the same sampling grid as the enhancement layer. In the first step, the lower layer VOP is subject to vertical resampling. Then, the vertically resampled image is subject to horizontal resampling.

### 7.9.2.5 Vertical resampling

The image subject to vertical resampling,  $d_{lower}[y][x]$ , is resampled to the enhancement layer vertical sampling grid using linear interpolation between the sample sites according to the following formula, where  $vert\_pic$  is the resulting image:

$$vert\_pic[y_h][x] = (16 - phase) * d_{lower}[y1][x] + phase * d_{lower}[y2][x]$$

where

$y_h$	=	output sample coordinate in $vert\_pic$
$y1$	=	$(y_h * vertical\_sampling\_factor\_m) / vertical\_sampling\_factor\_n$
$y2$	=	$y1 + 1$ if $y1 < video\_object\_layer\_height - 1$ $y1$ otherwise
phase	=	$(16 * (y_h * vertical\_sampling\_factor\_m) \% vertical\_sampling\_factor\_n)) // vertical\_sampling\_factor\_n$

where  $video\_object\_layer\_height$  is the height of the reference VOL.

Samples which lie outside the vertically upsampled reconstructed frame which are required for upsampling are obtained by border extension of the vertically upsampled reconstructed frame.

NOTE The calculation of phase assumes that the sample position in the enhancement layer at  $y_h = 0$  is spatially coincident with the first sample position of the lower layer. It is recognised that this is an approximation for the chrominance component if the  $chroma\_format == 4:2:0$ .

### 7.9.2.6 Horizontal resampling

The image subject to horizontal resampling,  $vert\_pic[y][x]$ , is resampled to the enhancement layer horizontal sampling grid using linear interpolation between the sample sites according to the following formula, where  $hor\_pic$  is the resulting image:

```

hor_pic[y][xh] = ((16 - phase) * vert_pic[y][x1] + phase * vert_pic[y][x2]) // 256
where
  xh      = output sample coordinate in hor_pic
  x1      = (xh * horizontal_sampling_factor_m) / horizontal_sampling_factor_n
  x2      = x1 + 1 if x1 < video_object_layer_width - 1
            x1 otherwise
  phase    = (16 * ((xh * horizontal_sampling_factor_m) %
                    horizontal_sampling_factor_n)) // horizontal_sampling_factor_n

```

where `video_object_layer_width` is the width of the reference VOL.

Samples which lie outside the lower layer reconstructed frame which are required for upsampling are obtained by border extension of the lower layer reconstructed frame.

#### 7.9.2.7 Selection and combination of spatial and temporal predictions

The spatial and temporal predictions can be selected or combined to form the actual prediction in B-VOP. The spatial prediction is referred to as “backward prediction”, while the temporal prediction is referred to as “forward prediction”. The combination of these predictions can be used as “interpolate prediction”. In the case of P-VOP, only the spatial prediction (prediction from the reference layer) can be used as the forward prediction. The prediction in the enhancement layer is defined in the following formulae.

$$\begin{aligned}
\text{pel\_pred}[y][x] &= \text{pel\_pred\_temp}[y][x] && \text{(forward in B-VOP)} \\
\text{pel\_pred}[y][x] &= \text{pel\_pred\_spat}[y][x] = \text{hor\_pict}[y][x] && \text{(forward in P-VOP and backward in B-VOP)} \\
\text{pel\_pred}[y][x] &= (\text{pel\_pred\_temp}[y][x] + \text{pel\_pred\_spat}[y][x])//2 && \text{(Interpolate in B-VOP)}
\end{aligned}$$

`pel_pred_temp[y][x]` is used to denote the temporal prediction (formed within the enhancement layer). `pel_pred_spat[y][x]` is used to denote the prediction formed from the lower layer. `pel_pred[y][x]` is denoted the resulting prediction.

#### 7.9.2.8 Decoding process of enhancement layer

The VOP in the enhancement layer is decoded as either I-VOP, P-VOP or B-VOP.

##### 7.9.2.9 Decoding of I-VOPs

The decoding process of the I-VOP in the enhancement layer is the same as the non\_scalable decoding process.

##### 7.9.2.10 Decoding of P-VOPs

In P-VOP, the `ref_select_code` shall be “11”, i.e., the prediction reference is set to the temporally coincident VOP in the base layer. The reference layer is indicated by `ref_layer_id` in `VideoObjectLayer` class. In the case of spatial prediction, the motion vector shall be set to 0 at the decoding process and is not encoded in the bitstream.

A variable length codeword giving information about the macroblock type and the coded block pattern for chrominance is `mcbpc`. The codewords for `mcbpc` in the enhancement layer are the same as the base layer and shown in Table B-7. `mcbpc` shall be included in coded macroblocks.

The macroblock type gives information about the macroblock and which data elements are present. Macroblock types and included elements in the enhancement layer bitstream are listed in subclause B.1.1.

In the case of the enhancement layer of spatial scalability, `INTER4V` shall not be used. The macroblock of `INTER` or `INTER+Q` is encoded using the spatial prediction.

##### 7.9.2.11 Decoding of B-VOPs

In B-VOP, the `ref_select_code` shall be “00”, i.e., the backward prediction reference is set to the temporally coincident VOP in the base layer, and the forward prediction reference is set to the most recently decoded VOP in the enhancement layer. In the case of spatial prediction, the motion vector shall be set to 0 at the decoding process and is not encoded in the bitstream.

modb shall be present in coded macroblocks belonging to B-VOPs. The codeword is the same as the base layer and is shown in Table B-3. In case mb\_type does not exist the default shall be set to "Forward MC" (prediction from the last decoded VOP in the same reference layer). modb shall be encoded in all macroblocks. If its value is equal to '1', further information is not transmitted for this macroblock. The decoder treats the prediction of this macroblock as forward MC with motion vector equal to zero.

mb\_type is present only in coded macroblocks belonging to B-VOPs. The mb\_type gives information about the macroblock and which data elements are present. mb\_type and included elements in the enhancement layer bitstream are listed in Table B-5.

In the case of the enhancement layer of spatial scalability, direct mode shall not be used. The decoding process of the forward motion vectors are the same as the base layer.

## 7.10 Still texture object decoding

The block diagram of the decoder is shown in Figure 7-35.

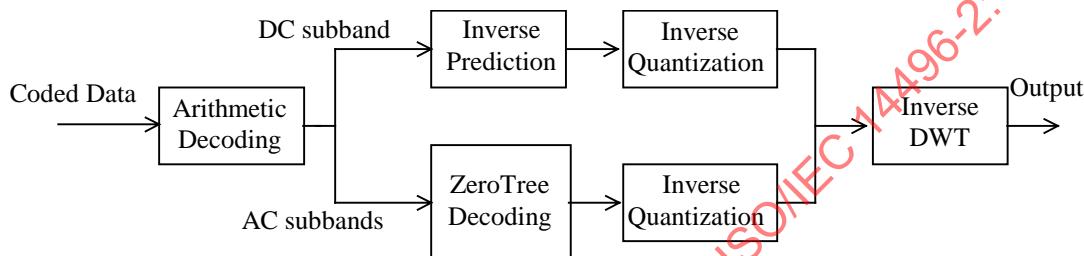


Figure 7-35 -- Block diagram of the decoder

The basic modules of a zero-tree wavelet based decoding scheme are as follows:

1. Arithmetic decoding of the DC subband using a predictive scheme.
2. Arithmetic decoding of the bitstream into quantized wavelet coefficients and the significance map for AC subbands.
3. Zero-tree decoding of the higher subband wavelet coefficients.
4. Inverse quantization of the wavelet coefficients.
5. Composition of the texture using inverse discrete wavelet transform (IDWT).

### 7.10.1 Decoding of the DC subband

The wavelet coefficients of DC band are decoded independently from the other bands. First the quantization step size decoded, then the magnitude of the minimum value of the differential quantization indices "band\_offset" and the maximum value of the differential quantization indices "band\_max\_value" are decoded from bitstream. The parameter "band\_offset" is negative or zero integer and the parameter "band\_max" is a positive integer, so only the magnitude of these parameters are read from the bitstream.

The arithmetic model is initialized with a uniform distribution of band\_max\_value-band\_offset+1. Then, the differential quantization indices are decoded using the arithmetic decoder in a raster scan order, starting from the upper left index and ending with the lowest right one. The model is updated with the decoding of each bits of the predicted wavelet quantization index to adopt the probability model to the statistics of DC band.

The "band\_offset" is added to all the decoded quantization indices, and an inverse predictive scheme is applied. Each of the current indices  $w_x$  is predicted from three quantization indices in its neighborhood, i.e.  $w_A$ ,  $w_B$ , and  $w_C$  (see Figure 7-36), and the predicted value is added to the current decoded coefficient. That is,

```

if (|w_A-w_B|) < |w_B-w_C|
  ŵ_x = w_C
else
  ŵ_x = w_A
  w_x = w_x + ŵ_x
  
```

If any of nodes A, B or C is not in the image, its value is set to zero for the purpose of the inverse prediction. Finally, the inverse quantization scheme is applied to all decoded values to obtain the wavelet coefficients of DC band.

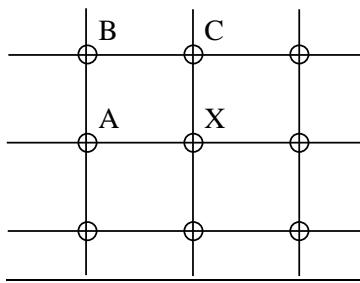


Figure 7-36 -- DPCM decoding of DC band coefficients

#### 7.10.2 ZeroTree Decoding of the Higher Bands

The zero-tree algorithm is based on the strong correlation between the amplitudes of the wavelet coefficients across scales, and on the idea of partial ordering of the coefficients. The coefficient at the coarse scale is called the *parent*, and all coefficients at the same spatial location, and of similar orientation, at the next finer scale are that parent's children. Figure 7-37 shows a wavelet tree where the parents and the children are indicated by squares and connected by lines. Since the DC subband (shown at the upper left in Figure 7-37) is coded separately using a DPCM scheme, the wavelet trees start from the adjacent higher bands.

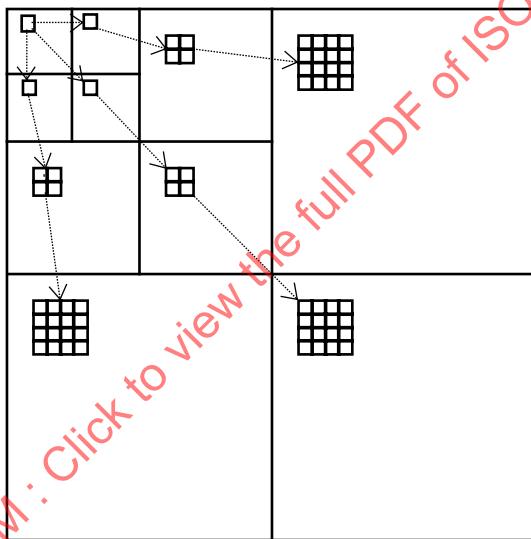


Figure 7-37 -- Parent-child relationship of wavelet coefficients

In transform-based coding, it is typically true that a large percentage of the transform coefficients are quantized to zero. A substantial number of bits must be spent either encoding these zero-valued quantized coefficients, or else encoding the location of the non-zero-valued quantized coefficients. ZeroTree Coding uses a data structure called a zerotree, built on the parent-child relationships described above, and used for encoding the location of non-zero quantized wavelet coefficients. The zerotree structure takes advantage of the principle that if a wavelet coefficient at a coarse scale is "insignificant" (quantized to zero), then all wavelet coefficients of the same orientation at the same spatial location at finer wavelet scales are also likely to be "insignificant". Zerotrees exist at any tree node where the coefficient is zero and all its descendants are also zero.

The wavelet trees are efficiently represented and coded by scanning each tree from the root in the 3 lowest AC bands through the children, and assigning one of four symbols to each node encountered: *zerotree root* (*ZTR*), *value zerotree root* (*VZTR*), *isolated zero* (*IZ*) or *value* (*VAL*). A *ZTR* denotes a coefficient that is the root of a zerotree. Zerotrees do not need to be scanned further because it is known that all coefficients in such a tree have amplitude zero. A *VZTR* is a node where the coefficient has a nonzero amplitude, and all four children are zerotree roots. The scan of this tree can stop at this symbol. An *IZ* identifies a coefficient with amplitude zero, but also with some nonzero descendant. A *VAL* symbol identifies a coefficient with amplitude nonzero, and with some nonzero

descendant. The symbols and quantized coefficients are losslessly encoded using an adaptive arithmetic coder. Table 7-15 shows the mapping of indices of the arithmetic decoding model into the zerotree symbols:

**Table 7-15 -- The indexing of zerotree symbols**

index	Symbol
0	IZ
1	VAL
2	ZTR
3	VZTR


In order to achieve a wide range of scalability levels efficiently as needed by different applications, three different zerotree scanning and associated inverse quantization methods are employed. The encoding mode is specified in bitstream with quantization\_type field as one of 1) single\_quant, 2) multi\_quant or 3) bilevel\_quant:

**Table 7-16 -- The quantization types**

code	quantization_type
01	single_quant
10	multi_quant
11	bilevel_quant

In single\_quant mode, the bitstream contains only one zero-tree map for the wavelet coefficients. After arithmetic decoding, the inverse quantization is applied to obtain the reconstructed wavelet coefficients and at the end, the inverse wavelet transform is applied to those coefficients.

In multi\_quant mode, a multiscale zerotree decoding scheme is employed. Figure 7-38 shows the concept of this technique.

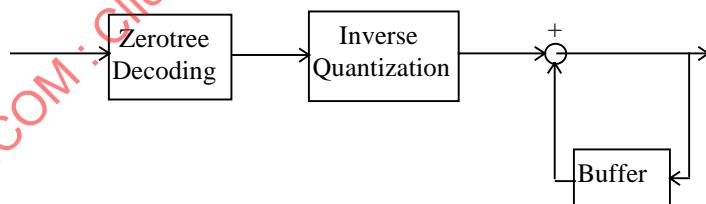

**Figure 7-38 -- Multiscale zerotree decoding**

The wavelet coefficients of the first spatial (and/or SNR) layer are read from the bitstream and decoded using the arithmetic decoder. Zerotree scanning is used for decoding the significant maps and quantized coefficients and locating them in their corresponding positions in trees.. These values are saved in the buffer to be used for quantization refinement at the next scalability layer. Then, an inverse quantization is applied to these indices to obtain the quantized wavelet coefficients. An inverse wavelet transform can also be applied to these coefficients to obtain the first decoded image. The above procedure is applied for the next spatial/SNR layers.

The bilevel\_quant mode enables fine granular SNR scalability by encoding the wavelet coefficients in a bitplane by bitplane fashion. This mode uses the same zerotree symbols as the multi\_quant mode. In this mode, a zero-tree map is decoded for each bitplane, indicating which wavelet coefficients are nonzero relative to that bitplane. The inverse quantization is also performed bitplane by bitplane. After the zero-tree map, additional bits are decoded to refine the accuracy of the previously decoded coefficients.

### 7.10.2.1 Zerotree Scanning

In all the three quantization modes, the wavelet coefficients are scanned either in the tree-depth fashion or in the band-by-band fashion. In the tree-depth scanning order all coefficients of each tree are decoded before starting decoding of the next tree. In the band-by-band scanning order, all coefficients are decoded from the lowest to the highest frequency subbands.

Figure 7-39 shows the scanning order for a 16x16 image, with 3 levels of decomposition. In this figure, the indices 0,1,2,3 represent the DC band coefficients which are decoded separately. The remaining coefficients are decoded in the order shown in this figure. As an example, indices 4,5,..., 24 represent one tree. At first, coefficients in this tree are decoded starting from index 4 and ending at index 24. Then, the coefficients in the second tree are decoded starting from index 25 and ending at 45. The third tree is decoded starting from index 46 and ending at index 66 and so on.

0	1	4	67	5	6	68	69	9	10	13	14	72	73	76	77
2	3	130	193	7	8	70	71	11	12	15	16	74	75	78	79
25	88	46	109	131	132	194	195	17	18	21	22	80	81	84	85
151	214	172	235	133	134	196	197	19	20	23	24	82	83	86	87
26	27	89	90	47	48	110	111	135	136	139	140	198	199	202	203
28	29	91	92	49	50	112	113	137	138	141	142	200	201	204	205
152	153	215	216	173	174	236	237	143	144	147	148	206	207	210	211
154	155	217	218	175	176	238	239	145	146	149	150	208	209	212	213
30	31	34	35	93	94	97	98	51	52	55	56	114	115	118	119
32	33	36	37	95	96	99	100	53	54	57	58	116	117	120	121
38	39	42	43	101	102	105	106	59	60	63	64	122	123	126	127
40	41	44	45	103	104	107	108	61	62	65	66	124	125	128	129
156	157	160	161	219	220	223	224	177	178	181	182	240	241	244	245
158	159	162	163	221	222	225	226	179	180	183	184	242	243	246	247
164	165	168	169	227	228	231	232	185	186	189	190	248	249	252	253
166	167	170	171	229	230	233	234	187	188	191	192	250	251	254	255

**Figure 7-39 -- Tree depth scanning order of a wavelet block in the all three modes**

Figure 7-40 shows that the wavelet coefficients are scanned in the subband by subband fashion, from the lowest to the highest frequency subbands. This figure shows an example of decoding order for a 16x16 image with 3 levels of decomposition for the subband by subband scanning. The DC band is located at upper left corner (with indices 0, 1, 2, 3) and is decoded separately as described in DC band decoding. The remaining coefficients are decoded in the order which is shown in the figure, starting from index 4 and ending at index 255. In multi\_quant mode, at first scalability layer, the zerotree symbols and the corresponding values are decoded for the wavelet coefficients of that scalability layer. For the next scalability layers, the zerotree map is updated along with the corresponding value refinements. In each scalability layer, a new zerotree symbol is decoded for a coefficient only if it was decoded as ZTR or IZ in previous scalability layer or it is currently in SKIP mode. A node is said to be in SKIP mode when the number of quantization refinement levels for the current scalability layer is one. The detailed description of the refinement of quantization level is found in subclause 7.10.3. If the coefficient was decoded as VAL in previous layer and it is not currently in SKIP mode, a VAL symbol is also assigned to it at the current layer and only its refinement value is decoded from bitstream.

0	1	4	7	16	17	28	29	64	65	68	69	112	113	116	117
2	3	10	13	18	19	30	31	66	67	70	71	114	115	118	119
5	8	6	9	40	41	52	53	72	73	76	77	120	121	124	125
11	14	12	15	42	43	54	55	74	75	78	79	122	123	126	127
20	21	32	33	24	25	36	37	160	161	164	165	208	209	212	213
22	23	34	35	26	27	38	39	162	163	166	167	210	211	214	215
44	45	56	57	48	49	60	61	168	169	172	173	216	217	220	221
46	47	58	59	50	51	62	63	170	171	174	175	218	219	222	223
80	81	84	85	128	129	132	133	96	97	100	101	144	145	148	149
82	83	86	87	130	131	134	135	98	99	102	103	146	147	150	151
88	89	92	93	136	137	140	141	104	105	108	109	152	153	156	157
90	91	94	95	138	139	142	143	106	107	110	111	154	155	158	159
176	177	180	181	224	225	228	229	192	193	196	197	240	241	244	245
178	179	182	183	226	227	230	231	194	195	198	199	242	243	246	247
184	185	188	189	232	233	236	237	200	201	204	205	248	249	252	253
186	187	190	191	234	235	238	239	202	203	206	207	250	251	254	255

**Figure 7-40 -- The band-by-band scanning order for all three modes**

In bilevel\_quant mode, the band by band scanning is also employed, similar to the multi\_quant mode. When bi-level quantization is applied, the coefficients that are already found significant are replaced with zero symbols for the purpose of zero-tree forming in later scans.

#### 7.10.2.2 Entropy Decoding

The zero-tree (or type) symbols, quantized coefficient values (magnitude and sign), and residual values (for the multi quant mode) are all decoded using an adaptive arithmetic decoder with a given symbol alphabet. The arithmetic decoder adaptively tracks the statistics of the zerotree symbols and decoded values. For both the single quant and multi quant modes the arithmetic decoder is initialized at the beginning of each color loop for band-by-band scanning and at the beginning of the tree-block loop for tree-depth scanning. In order to avoid start code emulation, the arithmetic encoder always starts with stuffing one bit '1' at the beginning of the entropy encoding. It also stuffs one bit '1' immediately after it encodes every 22 successive '0's. It stuffs one bit '1' to the end of bitstream in the case in which the last output bit of arithmetic encoder is '0'. Thus, the arithmetic decoder reads and discards one bit before starts entropy decoding. During the decoding, it also reads and discards one bit after receiving every 22 successive '0's. The arithmetic decoder reads one bit and discards it if the last input bit to the arithmetic decoder is '0'.

The context models used for SQ and MQ are identical to the ones used in BQ mode.

For both scanning orders in the single quant and multi\_quant modes separate probability models are kept for each color and wavelet decomposition layer for the type and sign symbols while separate probability models are kept for each color, wavelet decomposition layer, and bitplane for the magnitude and residual symbols. All the models are initialized with a uniform probability distribution.

The models and symbol sets for the non-zerotree type quantities to be decoded are as follows:

Model	Possible Values
Sign	POSITIVE (0), NEGATIVE (1)
Magnitude	0, 1
Residual	0, 1

The possible values of the magnitudes and residuals are only 0 or 1 because each bitplane is being decoded separately. The non-residual values are decoded in two steps. First, the absolute value is decoded in a bitplane fashion using the *magnitude* probability models, then its sign is decoded.

For the decoding of the type symbols different probability models are kept for the leaf and non-leaf coefficients. For the multi quant mode, context modeling, based on the zerotree type of the coefficient in the previous scalability layer, is used. The different zerotree type models and their possible values are as follows:

Context and Leaf/Non-Leaf	Possible Values
INIT	ZTR (2), IZ (0), VZTR (3), VAL (1)
ZTR	ZTR (2), IZ (0), VZTR (3), VAL (1)
ZTR DESCENDENT	ZTR (2), IZ (0), VZTR (3), VAL (1)
IZ	IZ (0), VAL (1)
LEAF INIT	ZTR (0), VZTR (1)
LEAF ZTR	ZTR (0), VZTR (1)
LEAF ZTR DESCENDENT	ZTR (0), VZTR (1)

For the single quant mode only the INIT and LEAF INIT models are used. For the multi quant mode for the first scalability layer only the INIT and LEAF INIT models are used. Subsequent scalability layers in the multi quant mode use the context associated with the type. If a new spatial layer is added then the contexts of all previous leaf band coefficients are switched to the corresponding non-leaf contexts. The coefficients in the newly added bands use the LEAF INIT context. The residual models are used to decode the coefficient refinements if in the previous layer, a VZTR or VAL symbol was assigned. If a node is currently not in SKIP mode (meaning that no refinement is being done for the coefficient – see subclause 7.10.3 on inverse quantization for details) only the magnitude of the refinements are decoded as these values are always zero or positive integers.

If a node is in SKIP mode, then its new zerotree symbol is decoded from bitstream, but no value is decoded for the node and its value in the current scalability layer is assumed to be zero.

States in Previous Bitplane	Possibilities in current bitplane
ZTR	ZTR, VZTR, IZ, VAL
VZTR	SKIP
IZ	IZ, VAL
VAL	SKIP
DZTR	ZTR, VTRZ, IZ, VAL

For the bi-level quantization mode, the zero-tree map is decoded for each bitplane, indicating which wavelet coefficients are zeros relative to the current quantization step size. Different probability models for the arithmetic decoder are used and updated according to the local contexts. For decoding the zerotree symbols, five context models are used, which are dependent on the status of the current wavelet coefficients in the zerotree formed in the previous bitplane decoding. Specifically, the five models correspond to the following contexts of the current wavelet coefficient:

- IZ: the previous zerotree symbol is Isolated Zero.
- VAL: the previous zerotree symbol is Value.
- ZTR: the previous zerotree symbol is Zerotree Root.
- VZTR: the previous zerotree symbol is valued zerotree root.
- DZTR: in previous bitplane, the current coefficient is a descendant of a zerotree root

The additional symbol DZTR is used for switching the models only, where DZTR refers to the descendant of a ZTR symbol. The context symbols DZTR can be inferred from the decoding process and are not included in the bitstream. They are used for switching the models only. At the beginning of the decoding the first bitplane, the contexts of the coefficients are initialized to be DZ. For the highest subband, only IZ and VAL are possible (no ZTR and VZTR are possible). Therefore, we initialize the arithmetic model for the last band differently (with zero probability for ZTR and VZTR symbols).

For decoding the sign information, another context model (the sign model) is used and updated. For decoding the refinement bits, another statistical model (the refinement model) is used.

Each decomposition levels have their own separate arithmetic models. Therefore, the above decoding process applies to each decomposition levels. All models are initialized at the beginning of coding each bitplane.

After the zero-tree map, additional bits are received to refine the accuracy of the coefficients that are already marked significant by previously received information at the decoder. For each significant coefficient, the 1-bit bi-level quantized refinement values are entropy coded using the arithmetic coder.

### 7.10.3 Inverse Quantization

Different quantization step sizes (one for each color component) are specified for each level of scalability. The quantizer of the DC band is a uniform mid-step quantizer with a dead zone equal to the quantization step size. The quantization index is a signed integer number and the quantization reconstructed value is obtained using the following equation:

$$V = id * Qdc,$$

where  $V$  is the reconstructed value,  $id$  is the decoded index and  $Qdc$  is the quantization step size.

All the quantizers of the higher bands (in all quantization modes) are uniform mid-step quantizer with a dead zone 2 times the quantization step size. For the single quantization mode, the quantization index is an signed integer. The reconstructed value is obtained using the following algorithm:

```

if (id == 0)
    V = 0;
else if ( id > 0 )
    V = id*Q+Q/2;
else
    V = id*Q-Q/2;

```

where  $V$  is the reconstructed value,  $id$  is the decoded index and  $Q$  is the quantization step size.

In the multi-quantization mode each SNR layer within each spatial layer has an associated quantization step-size value (Q value). These different Q Values are used for SNR scalability. A lower Q Value will result in a more accurate reconstruction.

If a coefficient is in a given spatial layer it is also in all higher numbered spatial layers. SNR scalability may be continued on these coefficients in the higher numbered spatial layers in the same way as is done in the spatial layer the coefficient first arises in. Thus, we can think of all the coefficients which first arise in a particular spatial layer as having a corresponding sequence of Q Values (call it a Q Sequence). The Q Sequence is made up of the quantization values for all SNR layers in the spatial layer the coefficient first arises in plus the quantization values in all SNR layers in all higher spatial layers. The order is from lower to higher numbered spatial layers and from lower to higher numbered SNR layers within each spatial layer.

#### EXAMPLE

Let the quantization value of the  $i$ -th spatial layer and the  $j$ -th SNR layer be denoted by  $Q(i,j)$ . Assume we have the following scenario:

Spatial Layer	SNR Layer		
	0	1	2
0	$Q(0,0)$	$Q(0,1)$	$Q(0,2)$
1	$Q(1,0)$	$Q(1,1)$	$Q(1,2)$
2	$Q(2,0)$	$Q(2,1)$	$Q(2,2)$

The Q Sequence which will be used to quantize all coefficients which first arise in spatial layer 0 is:

$$<Q(0,0) \ Q(0,1) \ Q(0,2) \ Q(1,0) \ Q(1,1) \ Q(1,2) \ Q(2,0) \ Q(2,1) \ Q(2,2)>$$

while the sequence for all coefficients first arising in spatial layer 1 is:

$\langle Q(1,0) \ Q(1,1) \ Q(1,2) \ Q(2,0) \ Q(2,1) \ Q(2,2) \rangle$

and the sequence for all coefficients first arising in spatial layer 2:

$\langle Q(2,0) \ Q(2,1) \ Q(2,2) \rangle$ .

As in the single-quantization case we would like to have a uniform quantizer for all layers. Due to the manner in which the Q Values are used to achieve scalability (described below), in order to have a (approximately) uniform quantizer at each layer, we may have to revise the Q Values extracted from the bitstream before reconstruction. This revision is necessary if the Q Values within each Q Sequence are not integer multiples of one another or if Q Value is greater than a Q Value occurring earlier in the Q Sequence.

## EXAMPLES

Q Sequences needing no revision:  $\langle 24 \ 8 \ 2 \rangle$  and  $\langle 81 \ 81 \ 27 \rangle$ .

Q Sequences needing revision:  $\langle 31 \ 9 \ 2 \rangle$  (non-integer multiples) and  $\langle 81 \ 162 \ 4 \rangle$  (increasing Q Value).

If a coefficient's quantization indices have been zero for all previous scalability layers (spatial and SNR) or if it is the first scalability layer, then the reconstruction is the similar to the single-quantization mode described above. The difference is in that the refined Q Values may be used instead of the ones extracted from the bitstream. The refinement process is described below in steps 1 and 2. If there has been a non-zero quantization index in a previous scalability layer then the quantization index specifies a refinement of the previous quantization. The indices are then called residuals. For every coefficient and scalability layer we know (1) the quantization interval where the coefficient occurred in the last scalability layer (both size and location), (2) the spatial layer the coefficient first arose in (and thus, which Q Sequence to use), (3) the current Q Value and the previous Q Value in the Q Sequence, and (4) the refinement (if any) of the previous Q Value.

The reconstruction of the residual is calculated in the following five steps.

### Step 1: Calculation of the Number of Refinement Intervals

The quantization interval which was indexed in the previous layer is to be partitioned into disjoint intervals. The number of these "refinement" intervals is calculated based solely on the current Q Value (call it  $curQ$ ) and the previous Q Value (call it  $prevQ$ ). Note that  $prevQ$  may have been revised as mentioned above. Letting  $m$  be the number of refinement intervals we calculate

$$m = \text{ROUND}(prevQ \div curQ)$$

where  $\text{ROUND}(x) = \text{MAX}(\text{nearest integer of } x, 1)$ .

If  $m = 1$ , no refinement is needed and no value will have been sent. If, at a certain scalability layer, a node has  $m=1$  then it is said to be in SKIP mode. Thus, steps 2, 3, and 4 need not be performed for the coefficient.

### Step 2: Calculation of the Maximum Refinement Interval Size

Using the number of refinement intervals, the current Q Value,  $curQ$ , is revised (if necessary).

$$curQ = \text{CEIL}(prevQ \div m)$$

where CEIL rounds up to the nearest integer.

$curQ$  represents the maximum size of the intervals in the partition. Since  $prevQ$  is the previous layer's  $curQ$  (see step 5), we see that  $prevQ$  represents the maximum size of the intervals in the partition used in the previous scalability layer.

### Step 3: Construction of Refinement Partition

Using the values  $m$  and  $curQ$  calculated above and the size of quantization interval where the coefficient occurred in the last scalability layer, we form the refinement partition.

The previous layer's quantization interval is partitioned into  $m$  intervals which are of size  $curQ$  or  $curQ-1$ . The residual will be one of the values  $\{0, 1, \dots, m-1\}$  which represent an index into this partition. A lower number index corresponds to an interval in the partition covering lower magnitude values. If the partition is made up of different size intervals ( $curQ$  and  $curQ-1$ ) then the  $curQ$  size intervals correspond to the lower indices. Some combination of  $m$   $curQ$  and  $curQ-1$  interval sizes are sufficient to cover the previous quantization interval. From step 2 we know that the previous quantization interval is of size  $prevQ$  or  $prevQ-1$ .

#### Step 4: Calculation of Reconstructed Value

The interval in the partition indexed by the residual is mapped to the reconstruction value. The reconstruction is just the middle point of the interval in the partition that the residual indexes. That is, if  $PartStart$  is the start of the interval in the partition which is indexed by the residual,  $PartStartSize$  is the size of the interval,  $sign$  is the corresponding sign (known from prior scalability layers), and  $//$  is integer division then the reconstructed value is:

$$PartStart + sign * (PartStartSize-1) // 2$$

#### Step 5: Assignment of Maximum Size

If there is another scalability layer then  $prevQ$  is assigned the value of  $curQ$ .

Note that since steps 1, 2, and 5 depend entirely on the Q Values found in the Q Sequences they only need to be done once in each scalability layer for each Q Sequence being used in the current spatial layer.

### FOUR EXAMPLES

In the examples:

1. 1. let the Q Values be  $Q1$  ,  $Q2$  , and  $Q3$ ,
2. 2. let two sample coefficients to be quantized be  $C1$  and  $C2$ ,
3. 3. let  $Cq1$  and  $Cq2$  denote the corresponding quantized coefficients or residuals, and
4. 4. let  $iC1$  and  $iC2$  denote the corresponding reconstructed coefficient values.

#### 1. Q Values not in need of revision

$$Q1 = 24, Q2 = 8, Q3 = 2, \\ C1 = 16, \text{ and } C2 = 28.$$

At first scalability layer we have

$$Cq1 = C1/Q1 = 0 \\ iCq1 = 0 \\ Cq2 = C2/Q1 = 1 \\ iCq2 = 35$$

At second scalability layer we have

$$prevQ = Q1 = 24 \\ curQ = Q2 = 8 \\ m = \text{ROUND}(prevQ \div curQ) = \text{ROUND}(24 \div 8) = 3 \\ curQ = \text{CEIL}(prevQ \div m) = \text{CEIL}(24 \div 3) = 8 \\ \text{partition sizes} = \{8, 8, 8\} \\ Cq1 = C1/curQ = 2 \\ iCq1 = 19 \\ Cq2 = 0 \text{ (residual)} \\ iCq2 = 27$$

At third scalability layer we have

prevQ = curQ = 8  
 curQ = Q3 = 2  
 $m = \text{ROUND}(\text{prevQ} \div \text{curQ}) = \text{ROUND}(8 \div 2) = 4$   
 curQ = CEIL(prevQ  $\div$  m) = CEIL(8  $\div$  2) = 4  
 partition sizes = {2, 2, 2, 2}  
 Cq1 = 0 (residual)  
 iCq1 = 16  
 Cq2 = 2 (residual)  
 iCq2 = 28

## 2. Q Values not in need of revision

Q1 = 81, Q2 = 81, Q3 = 27,  
 C1 = 115, and C2 = 28.

At first scalability layer we have

Cq1 = C1/Q1 = 1  
 iCq1 = 121  
 Cq2 = C2/Q1 = 0  
 iCq2 = 0

At second scalability layer we have

prevQ = Q1 = 81  
 curQ = Q2 = 81  
 $m = \text{ROUND}(\text{prevQ} \div \text{curQ}) = \text{ROUND}(81 \div 81) = 1$   
 curQ = CEIL(prevQ  $\div$  m) = CEIL(81  $\div$  1) = 81  
 partition sizes = {81} (no refinement needed)  
 Cq1 = 0 (residual)  
 iCq1 = 121  
 Cq2 = C2/curQ = 0  
 iCq2 = 0

At third scalability layer we have

prevQ = curQ = 81  
 curQ = Q3 = 27  
 $m = \text{ROUND}(\text{prevQ} \div \text{curQ}) = \text{ROUND}(81 \div 27) = 3$   
 curQ = CEIL(prevQ  $\div$  m) = CEIL(81  $\div$  3) = 27  
 partition sizes = {27, 27, 27}  
 Cq1 = 1 (residual)  
 iCq1 = 121  
 Cq2 = C2/curQ = 1  
 iCq2 = 40

## 3. Q Values in need of revision

Q1 = 31, Q2 = 9, Q3 = 2,  
 C1 = 115, and C2 = 5.

At first scalability layer we have

Cq1 = C1/Q1 = 3  
 iCq1 = 108  
 Cq2 = C2/Q1 = 0  
 iCq2 = 0

At second scalability layer we have

```

prevQ = Q1 = 31
curQ = Q2 = 9
m = ROUND(prevQ÷curQ) = ROUND(31÷9) = 3
curQ = CEIL(prevQ÷m) = CEIL(31÷3) = 11
partition sizes = {11, 10, 10}
Cq1 = 2 (residual)
iCq1 = 118
Cq2 = C2/curQ = 0
iCq2 = 0

```

At third scalability layer we have

```

prevQ = curQ = 11
curQ = Q3 = 2
m = ROUND(prevQ÷curQ) = ROUND(11÷2) = 6
curQ = CEIL(prevQ÷m) = CEIL(11÷6) = 2
partition sizes = {2, 2, 2, 2, 2, 1} if value occurs in level with size 11
partition sizes = {2, 2, 2, 2, 1, 1} if value occurs in level with size 10
Cq1 = 0 (residual)
iCq1 = 114
Cq2 = C2/curQ = 2
iCq2 = 4

```

#### **4. Q Values in need of revision**

Q1 = 81, Q2 = 162, Q3 = 4,  
C1 = 115, and C2 = 5.

At first scalability layer we have

$$\begin{aligned}Cq_1 &= C1/Q1 = 1 \\iCq_1 &= 121 \\Cq_2 &= C2/Q1 = 0 \\iCq_2 &= 0\end{aligned}$$

At second scalability layer we have

prevQ = Q1 = 81  
 curQ = Q2 = 162  
 $m = \text{ROUND}(\text{prevQ} \div \text{curQ}) = \text{ROUND}(81 \div 162) = 1$   
 $\text{curQ} = \text{CEIL}(\text{prevQ} \div m) = \text{CEIL}(81 \div 1) = 81$   
 partition sizes = {81} (no refinement needed)  
 Cq1 = 0 (not used)  
 iCq1 = 121  
 $Cq2 = C2 / \text{curQ} = 0$  (not used)  
 iCq2 = 0

At third scalability layer we have

It is important to note that coefficients which first arose in different spatial layers may use different *prevQ* and *curQ* values. They are basically being quantized from different lists. That is, they have different corresponding Q Sequences.

### 7.10.3.1 Shape adaptive zerotree decoding

When the `texture_object_layer_shape` is not rectangular or `texture_object_layer_width!=integer*2wavelet_decomposition_level` or `texture_object_layer_height!=integer*2wavelet_decomposition_level`, the inverse shape adaptive wavelet transform is chosen to reconstruct the arbitrary-shaped image object or rectangular texture object. Decoding shape adaptive wavelet coefficients is the same as decoding regular wavelet coefficients except keep track of the locations of where to put the decoded wavelet coefficients according to the shape information, or a generated mask. The mask is generated with `texture_object_layer_width*texture_object_layer_height` pixels of value 255 at the upper-left corner of a frame of size  $w*2^{\text{wavelet_decomposition_level}} * h*2^{\text{wavelet_decomposition_level}}$  and the rest of the pixels being value 0, where  $w$  is the smallest integer that makes  $w*2^{\text{wavelet_decomposition_level}} > \text{texture_object_layer_width}$  and  $h$  is the smallest integer that makes  $h*2^{\text{wavelet_decomposition_level}} > \text{texture_object_layer_height}$ . Similar to decoding of regular wavelet coefficients, the decoded zerotree symbols at a lower subband are used to determine whether decoding is needed at higher subbands. The difference is now that some zerotree nodes correspond to the pixel locations outside the shape boundary and no bits are to be decoded for these `out_nodes`. Root layer is defined as the lowest three AC subbands, leaf layer is defined as the highest three AC subbands. For decomposition level of one, the overlapped root layer and leaf layer shall be treated as leaf layer.

#### 7.10.3.1.1 DC layer

The DC coefficient decoding is the same as that for rectangular image except the following,

1. Only those DC coefficients inside the shape boundary in the DC layer shall be traversed and decoded and DC coefficients outside the shape boundary may be set to zeros.
2. For the inverse DC prediction in the DC layer, if a reference coefficient (A, B, C in Fig. (DC prediction figure)) in the prediction context is outside the shape boundary, zero shall be used to form the prediction syntax.

#### 7.10.3.1.2 Root layer

At the root layer (the lowest 3 AC bands), the shape information is examined for every node to determine whether a node is an `out_node`.

If it is an `out_node`,

- no bits are decoded for this node;
- the four children nodes of this node are marked “`to_be_decoded`” (TBD);

otherwise,

- a zerotree symbol is decoded for this node using an adaptive arithmetic decoder.

If the decoded symbol for the node is either `isolated_zero` (IZ) or `value` (VAL),

- the four children nodes of this node are marked TBD;

otherwise,

- the symbol is either `zerotree_root` (ZTR) or `valued_zerotree_root` (VZTR) and the four children nodes of this node are marked “`no_code`” (NC).

If the symbol is `VAL` or `VZTR`,

- a non-zero wavelet coefficient is decoded for this node by root model;

otherwise,

- the symbol is either IZ or ZTR and the wavelet coefficient is set to zero for this node.

#### 7.10.3.1.3 Between root and leaf layer

At any layer between the root layer and the leaf layer, the shape information is examined for every node to determine whether a node is an `out_node`.

If it is an `out_node`,

- no bits are decoded for this node;
- the four children nodes of this node are marked as either TBD or NC depending on whether this node itself is marked TBD or NC respectively;

otherwise, if it is marked NC,

- no bits are decoded for this node;
- the wavelet coefficient is set to zero for this node;
- the four children nodes are marked NC;

otherwise,

- a zerotree symbol is decoded for this node using an adaptive arithmetic decoder.

If the decoded symbol for the node is either isolated\_zero (IZ) or value (VAL),

- the four children nodes of this node are marked TBD;

otherwise,

- the symbol is either zerotree\_root (ZTR) or valued\_zerotree\_root (VZTR) and the four nodes of this node are marked "no\_code" (NC).

If the symbol is VAL or VZTR,

- a non-zero wavelet coefficient is decoded for this node by valnz model;

otherwise,

- the symbol is either IZ or ZTR and the wavelet coefficient is set to zero for this node.

#### 7.10.3.1.4 Leaf layer

At the leaf layer, the shape information is examined for every node to determine whether a node is an out\_node.

If it is an out\_node,

- no bits are decoded for this node;

otherwise, if it is marked NC,

- no bits are decoded for this node;
- the wavelet coefficient is set to zero for this node;

otherwise,

- \* a wavelet coefficient is decoded for this node by valz adaptive arithmetic model;


#### 7.10.3.2 Shape decomposition

The shape information for both shape adaptive zerotree decoding and the inverse shape adaptive wavelet transform is obtained by decomposing the reconstructed shape from the shape decoder. Assuming binary shape with 0 or 1 indicating a pixel being outside or inside the arbitrarily shaped object, the shape decomposition procedure can be described as follows:

1. For each horizontal line, collect all even-indexed shape pixels together as the shape information for the horizontal low-pass band and collect all odd-indexed shape pixels together as the shape information for the horizontal high-pass band, except for the special case where the number of consecutive 1's is one.
2. For an isolated 1 in a horizontal line, whether at an even-indexed location or at an odd-indexed location, it is always put together with the shape pixels for the low-pass band and a 0 is put at the corresponding position together with the shape pixels for the high-pass band.
3. Perform the above operations for each vertical line after finishing all horizontal lines.
4. Use the above operations to decompose the shape pixels for the horizontal and vertical low-pass band further until the number of decomposition levels is reached.

## 7.11 Mesh object decoding

An overview of the decoding process is show in Figure 7-41.

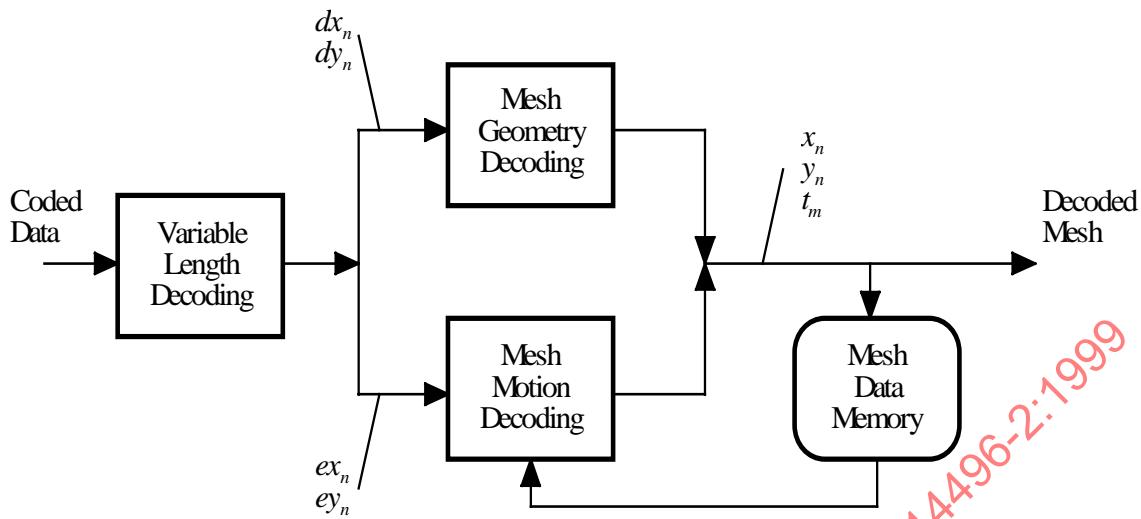

**Figure 7-41 -- Simplified 2D Mesh Object Decoding Process**

Variable length decoding takes the coded data and decodes either node point location data or node point motion data. Node point location data is denoted by  $dx_n$ ,  $dy_n$  and node point motion data is denoted by  $ex_n$ ,  $ey_n$ , where  $n$  is the node point index ( $n = 0, \dots, N-1$ ). Next, either mesh geometry decoding or mesh motion decoding is applied. Mesh geometry decoding computes the node point locations from the location data and reconstructs a triangular mesh from the node point locations. Mesh motion decoding computes the node point motion vectors from the motion data and applies these motion vectors to the node points of the previous mesh to reconstruct the current mesh.

The reconstructed mesh is stored in the mesh data memory, so that it may be used by the motion decoding process for the next mesh. Mesh data consists of node point locations ( $x_n, y_n$ ) and triangles  $t_m$ , where  $m$  is the triangle index ( $m = 0, \dots, M-1$ ) and each triangle  $t_m$  contains a triplet  $\langle i, j, k \rangle$  which stores the indices of the node points that form the three vertices of that triangle.

A mesh object consists of a sequence of mesh object planes. The `is_intra` flag of the mesh object plane class determines whether the data that follows specifies the initial geometry of a new dynamic mesh, or that it specifies the motion of the previous mesh to the current mesh, in a sequence of meshes. Firstly, the decoding of mesh geometry is described; then, the decoding of mesh motion is described. In this part of ISO/IEC 14496, a pixel-based coordinate system is assumed, where the x-axis points to the right from the origin, and the y-axis points down from the origin.

### 7.11.1 Mesh geometry decoding

Since the initial 2D triangular mesh is either a uniform mesh or a Delaunay mesh, the mesh triangular structure (i.e. the connections between node points) is not coded explicitly. Only a few parameters are coded for the uniform mesh; only the 2D node point coordinates  $\vec{p}_n = (x_n, y_n)$  are coded for the Delaunay mesh. In each case, the coded information defines the triangular structure of the mesh implicitly, such that it can be computed uniquely by the decoder. The `mesh_type_code` specifies whether the initial mesh is uniform or Delaunay.

#### 7.11.1.1 Uniform mesh

A 2D uniform mesh subdivides a rectangular object plane area into a set of rectangles, where each rectangle in turn is subdivided into two triangles. Adjacent triangles share node points. The node points are spaced equidistant horizontally as well as vertically. An example of a uniform mesh is given in Figure 7-42.

Five parameters are used to specify a uniform mesh. The first two parameters, `nr_mesh_nodes_hor` and `nr_mesh_nodes_vert`, specify the number of node points of the mesh in the horizontal, resp. vertical direction. In the example of Figure 7-42, `nr_mesh_nodes_hor` is equal to 5 and `nr_mesh_nodes_vert` is equal to 4. The next two parameters, `mesh_rect_size_hor` and `mesh_rect_size_vert`, specify the horizontal, resp. vertical size of each rectangle in half pixel units. The meaning of these parameters is indicated in Figure 7-42. The last parameter,

`triangle_split_code`, specifies how each rectangle is split to form two triangles. The four methods of splitting that are allowed are indicated in Figure 7-43. The top-left node point of a uniform mesh coincides with the origin of a local coordinate system.

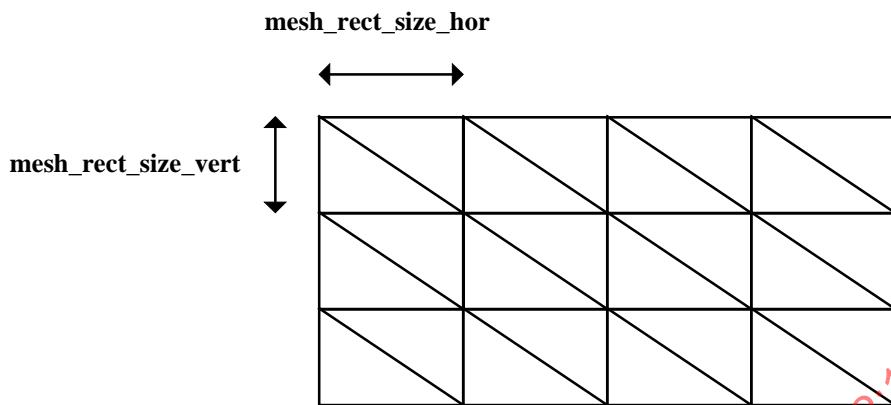


Figure 7-42 -- Specification of a uniform 2D mesh

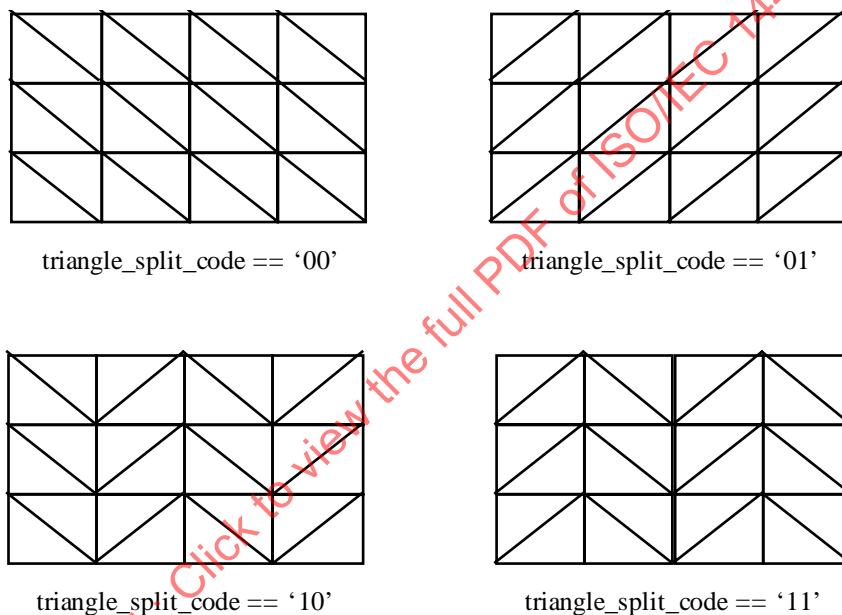


Figure 7-43 -- Illustration of the types of uniform meshes defined

#### 7.11.1.2 Delaunay mesh


First, the total number of node points in the mesh  $N$  is decoded; then, the number of node points that are on the boundary of the mesh  $N_b$  is decoded. Note that  $N$  is the sum of the number of nodes in the interior of the mesh,  $N_i$ , and the number of nodes on the boundary,  $N_b$ ,

$$N = N_i + N_b .$$

Now, the locations of boundary and interior node points are decoded, where we assume the origin of the local coordinate system is at the top left of the bounding rectangle surrounding the initial mesh. The x-, resp. y-coordinate of the first node point,  $\bar{p}_0 = (x_0, y_0)$ , is decoded directly, where  $x_0$  and  $y_0$  are specified w.r.t. to the origin of the local coordinate system. All the other node point coordinates are computed by adding a  $dx_n$ , resp.  $dy_n$  value to, resp. the x- and y-coordinate of the previously decoded node point. Thus, the coordinates of the initial node point  $\bar{p}_0 = (x_0, y_0)$  is decoded as is, whereas the coordinates of all other node points,  $\bar{p}_n = (x_n, y_n)$ ,  $n = 1, \dots, N - 1$ , are obtained by adding a decoded value to the previously decoded node point coordinates:

$$x_n = x_{n-1} + dx_n \quad \text{and} \quad y_n = y_{n-1} + dy_n .$$

The ordering in the sequence of decoded locations is such that the first  $N_b$  locations correspond to boundary nodes. Thus, after receiving the first  $N_b$  locations, the decoder is able to reconstruct the boundary of the mesh by connecting each pair of successive boundary nodes, as well as the first and the last, by straight-line edge segments. The next  $N - N_b$  values in the sequence of decoded locations correspond to interior node points. Thus, after receiving  $N$  nodes, the locations of both the boundary and interior nodes can be reconstructed, in addition to the polygonal shape of the boundary. This is illustrated with an example in Figure 7-44.

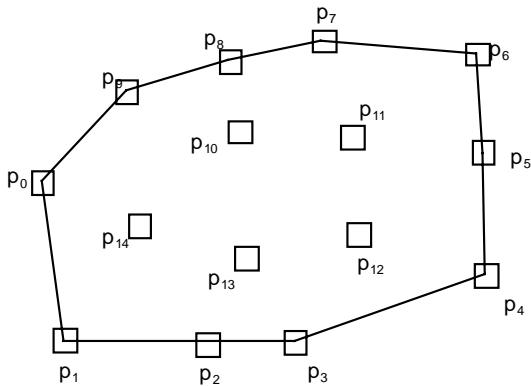


**Figure 7-44 -- Decoded node points and mesh boundary edge**

The mesh is finally obtained by applying constrained Delaunay triangulation to the set of decoded node points, where the polygonal mesh boundary is used as a constraint. A constrained triangulation of a set of node points  $\vec{p}_n$  contains the line segments between successive node points on the boundary as edges and contains triangles only in the interior of the region defined by the boundary. Each triangle  $t_k = \langle \vec{p}_l, \vec{p}_m, \vec{p}_n \rangle$  of a constrained Delaunay triangulation furthermore satisfies the property that the circumcircle of  $t_k$  does not contain in its interior any node point  $\vec{p}_r$  visible from all three vertices of  $t_k$ . A node point is visible from another node point if a straight line drawn between them falls entirely inside or exactly on the constraining polygonal boundary. The Delaunay triangulation process is defined as any algorithm that is equivalent to the following.

- Determine any triangulation of the given node points such that all triangles are contained in the interior of the polygonal boundary. The triangulation shall contain  $2N_i + N_b - 2$  triangles.
- Inspect each interior edge, shared by two opposite triangles, of the triangulation and test if the edge is locally Delaunay. If there is an interior edge that is not locally Delaunay, the two opposite triangles  $\langle p_a, p_b, p_c \rangle$  and  $\langle p_a, p_c, p_d \rangle$  sharing this edge are replaced by triangles  $\langle p_a, p_b, p_d \rangle$  and  $\langle p_b, p_c, p_d \rangle$ . Continue until all interior edges of the triangulation are locally Delaunay.

An interior edge, shared by two opposite triangles  $\langle p_a, p_b, p_c \rangle$  and  $\langle p_a, p_c, p_d \rangle$ , is locally Delaunay if point  $p_d$  is outside the circumcircle of triangle  $\langle p_a, p_b, p_c \rangle$ . If point  $p_d$  is inside the circumcircle of triangle  $\langle p_a, p_b, p_c \rangle$ , then the edge is not locally Delaunay. If point  $p_d$  is exactly on the circumcircle of triangle  $\langle p_a, p_b, p_c \rangle$ , then the edge between points  $p_a$  and  $p_c$  is deemed locally Delaunay only if point  $p_b$  or point  $p_d$  is the point (among these four points) with the maximum x-coordinate, or, in case there is more than one point with the same maximum x-coordinate, the point with the maximum y-coordinate among these points. An example of a mesh obtained by constrained triangulation of the node points of Figure 7-44 is shown in Figure 7-45.

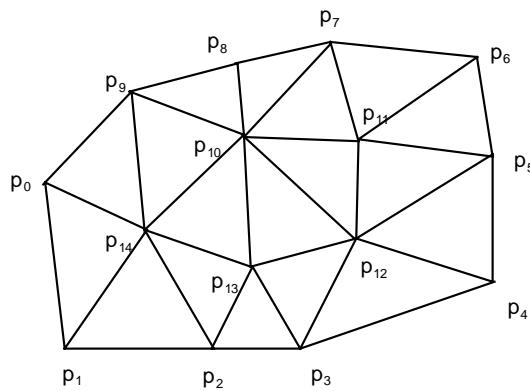

**Figure 7-45 -- Decoded triangular mesh obtained by constrained Delaunay triangulation**

### 7.11.2 Decoding of mesh motion vectors

Each node point  $\vec{p}_n$  of a 2D Mesh Object Plane numbered  $k$  in the sequence of Mesh Object Planes has a 2D motion vector  $\vec{v}_n = (vx_n, vy_n)$ , defined from Mesh Object Plane  $k$  to  $k+1$ . By decoding these motion vectors, one is able to reconstruct the locations of node points in Mesh Object Plane numbered  $k+1$ . The triangular topology of the mesh remains the same throughout the sequence. Node point motion vectors are decoded according to a predictive method, i.e., the components of each motion vector are predicted using the components of already decoded motion vectors of other node points.

#### 7.11.2.1 Motion vector prediction

To decode the motion vector of a node point  $\vec{p}_n$  that is part of a triangle  $t_k = \langle \vec{p}_l, \vec{p}_m, \vec{p}_n \rangle$ , where the two motion vectors  $\vec{v}_l$  and  $\vec{v}_m$  of the nodes  $\vec{p}_l$  and  $\vec{p}_m$  have already been decoded, one can use the values of  $\vec{v}_l$  and  $\vec{v}_m$  to predict  $\vec{v}_n$  and add the prediction vector to a decoded prediction error vector. Starting from an initial triangle  $t_k$  of which all three node motion vectors have been decoded, there must be at least one other, neighboring, triangle  $t_w$  that has two nodes in common with  $t_k$ . Since the motion vectors of the two nodes that  $t_k$  and  $t_w$  have in common have already been decoded, one can use these two motion vectors to predict the motion vector of the third node in  $t_w$ . The actual prediction vector  $\vec{w}_n$  is computed by averaging of the two prediction motion vectors and the components of the prediction vector are rounded to half-pixel accuracy, as follows:

$$\vec{w}_n = 0.5 \bullet (\text{floor}(vx_m + vx_l + 0.5), \text{floor}(vy_m + vy_l + 0.5)) ,$$

$$\vec{v}_n = \vec{w}_n + \vec{e}_n$$

Here,  $\vec{e}_n = (ex_n, ey_n)$  denotes the prediction error vector, the components of which are decoded from variable length codes. This procedure is repeated while traversing the triangles and nodes of the mesh, as explained below. While visiting all triangles of the mesh, the motion vector data of each node is decoded from the bitstream one by one. Note that no prediction is used to decode the first motion vector,

$$\vec{v}_{n_0} = \vec{e}_{n_0} ,$$

and that only the first decoded motion vector is used as a predictor to code the second motion vector,

$$\vec{v}_{n_1} = \vec{v}_{n_0} + \vec{e}_{n_1} .$$

Note further that the prediction error vector is specified only for node points with a nonzero motion vector. For all other node points, the motion vector is simply  $\vec{v}_n = (0, 0)$ .

Finally, the horizontal and vertical components of mesh node motion vectors are processed to lie within a certain range, equivalent to the processing of video block motion vectors described in subclause 7.6.3.

### 7.11.2.2 Mesh traversal

We use a *breadth-first traversal* to order all the triangles and nodes in the mesh numbered  $k$ , and to decode the motion vectors defined from mesh  $k$  to  $k+1$ . The breadth-first traversal is determined uniquely by the topology and geometry of an intra-coded mesh. That is, the ordering of the triangles and nodes shall be computed on an intra-coded Mesh Object Plane and remains constant for the following predictive-coded Mesh Object Planes. The breadth-first traversal of the mesh triangles is defined as follows (see Figure 7-46 for an illustration).

First, define the *initial triangle* as follows. Define the top left mesh node as the node  $n$  with minimum  $x_n + y_n$ , assuming the origin of the local coordinate system is at the top left. If there is more than one node with the same value of  $x_n + y_n$ , then choose the node point among these with minimum  $y$ . The initial triangle is the triangle that contains the edge between the top-left node of the mesh and the next clockwise node on the boundary. Label the initial triangle with the number 0.

Next, all other triangles are iteratively labeled with numbers 1, 2, ...,  $M - 1$ , where  $M$  is the number of triangles in the mesh, as follows.

Among all labeled triangles that have adjacent triangles which are not yet labeled, find the triangle with the lowest number label. This triangle is referred to in the following as the *current triangle*. Define the *base edge* of this triangle as the edge that connects this triangle to the already labeled neighboring triangle with the lowest number. In the case of the initial triangle, the base edge is defined as the edge between the top-left node and the next clockwise node on the boundary. Define the *right edge* of the current triangle as the next counterclockwise edge of the current triangle with respect to the base edge; and define the *left edge* as the next clockwise edge of the current triangle with respect to the base edge. That is, for a triangle  $t_k = \langle \vec{p}_l, \vec{p}_m, \vec{p}_n \rangle$ , where the vertices are in clockwise order, if  $\langle \vec{p}_l, \vec{p}_m \rangle$  is the base edge, then  $\langle \vec{p}_l, \vec{p}_n \rangle$  is the right edge and  $\langle \vec{p}_m, \vec{p}_n \rangle$  is the left edge.

Now, check if there is an unlabeled triangle adjacent to the current triangle, sharing the right edge. If there is such a triangle, label it with the next available number. Then check if there is an unlabeled triangle adjacent to the current triangle, sharing the left edge. If there is such a triangle, label it with the next available number.

This process is continued iteratively until all triangles have been labeled with a unique number  $m$ .

The ordering of the triangles according to their assigned label numbers implicitly defines the order in which the motion vector data of each node point is decoded, as described in the following. Initially, motion vector data for the top-left node of the mesh is retrieved from the bitstream. No prediction is used for the motion vector of this node, hence this data specifies the motion vector itself. Then, motion vector data for the second node, which is the next clockwise node on the boundary w.r.t. the top-left node, is retrieved from the bitstream. This data contains the prediction error for the motion vector of this node, where the motion vector of the top-left node is used as a prediction. Mark these first two nodes (that form the base edge of the initial triangle) with the label 'done'.

Next, process each triangle as determined by the label numbers. For each triangle, the base edge is determined as defined above. The motion vectors of the two nodes of the base edge of a triangle are used to form a prediction for the motion vector of the third node of that triangle. If that third node is not yet labeled 'done', motion vector data is retrieved and used as prediction error values, i.e. the decoded values are added to the prediction to obtain the actual motion vector. Then, that third node is labeled 'done'. If the third node is already labeled 'done', then it is simply ignored and no data is retrieved. Note that due to the ordering of the triangles as defined above, the two nodes on the base edge of a triangle are guaranteed to be labeled 'done' when that triangle is processed, signifying that their motion vectors have already been decoded and may be used as predictors.

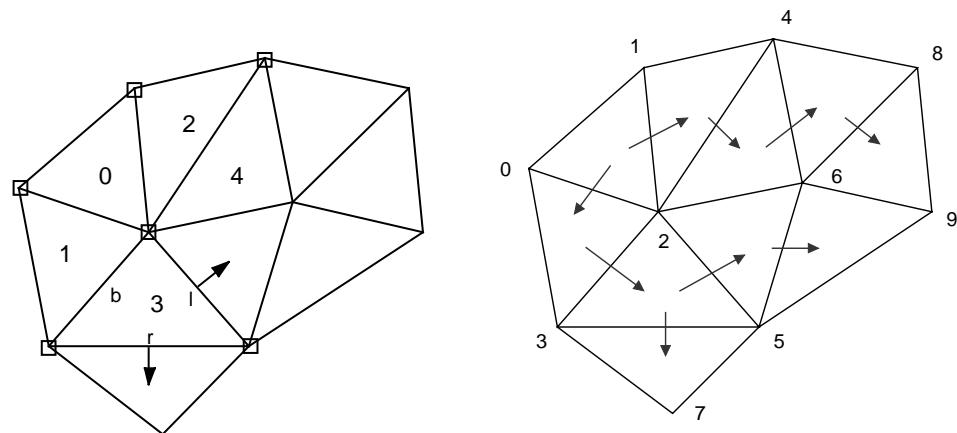


Figure 7-46 -- Breadth-first traversal of a 2D triangular example mesh

In Figure 7-46 an example is shown of breadth-first traversal. On the left, the traversal is halfway through the mesh - five triangles have been labeled (with numbers) and the motion vectors of six node points have been decoded (marked with a box symbol). The triangle which has been labeled '3' is the 'current triangle'; the base edge is 'b'; the right and left edge are 'r' and 'l'. The triangles that will be labeled next are the triangles sharing the right, resp. left edge with the current triangle. After those triangles are labeled, the triangle which has been labeled '4' will be the next 'current triangle' and another motion vector will be decoded. On the right, the traversed 2D triangular mesh is shown, illustrating the transitions between triangles and final order of node points according to which respective motion vectors are decoded.

## 7.12 Face object decoding

### 7.12.1 Frame based face object decoding

This subclause specifies the additional decoding process required for face object decoding.

The coded data is decoded by an arithmetic decoding process. The arithmetic decoding process is described in detail in annex B. Following the arithmetic decoding, the data is de-quantized by an inverse quantization process. The FAPs are obtained by a predictive decoding scheme as shown in Figure 7-47.

The base quantization step size QP for each FAP is listed in Table C-1. The quantization parameter fap\_quant is applied uniformly to all FAPs. The magnitude of the quantization scaling factor ranges from 1 to 8. The value of fap\_quant == 0 has a special meaning, it is used to indicate lossless coding mode, so no dequantization is applied. The quantization stepsize is obtained as follows:

```
if (fap_quant)
    qstep = QP * fap_quant
else
    qstep = 1
```

The dequantized FAP'(t) is obtained from the decoded coefficient FAP''(t) as follows:

$$FAP'(t) = qstep * FAP''(t)$$

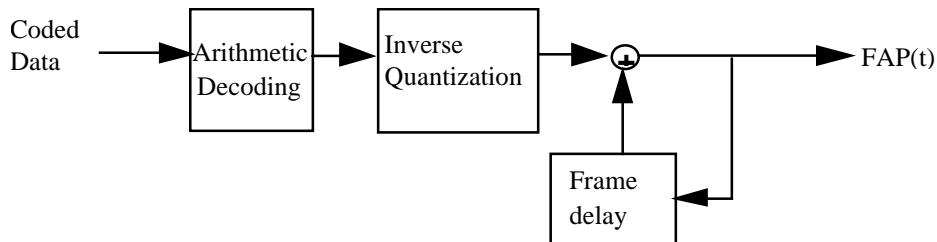


Figure 7-47 -- FAP decoding

### 7.12.1.1 Decoding of faps

For a given frame FAPs in the decoder assume one of three of the following states:

1. set by a value transmitted by the encoder
2. retain a value previously sent by the encoder
3. interpolated by the decoder

FAP values which have been initialized in an intra coded FAP set are assumed to retain those values if subsequently masked out unless a special mask mode is used to indicate interpolation by the decoder. FAP values which have never been initialized must be estimated by the decoder. For example, if only FAP group 2 (inner lip) is used and FAP group 8 (outer lip) is never used, the outer lip points must be estimated by the decoder. In a second example the FAP decoder is also expected to enforce symmetry when only the left or right portion of a symmetric FAP set is received (e.g. if the left eye is moved and the right eye is subject to interpolation, it is to be moved in the same way as the left eye).

### 7.12.2 DCT based face object decoding

The bitstream is decoded into segments of FAPs, where each segment is composed of a temporal sequence of 16 FAP object planes. The block diagram of the decoder is shown in Figure 7-48.

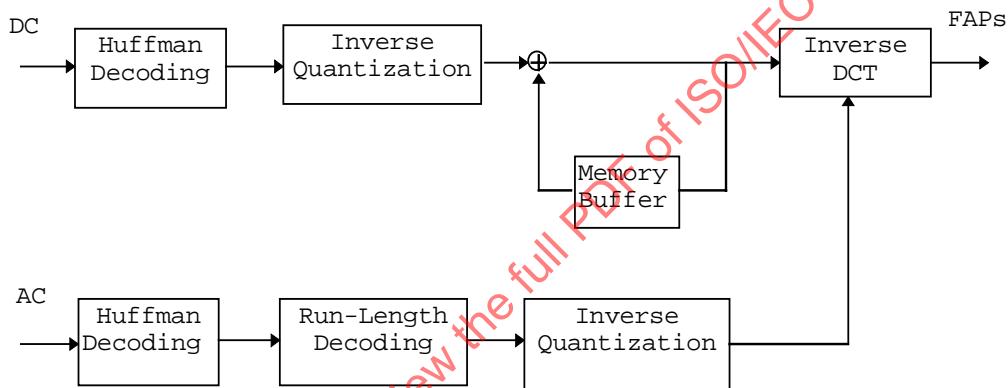


Figure 7-48 -- Block diagram of the DCT-based decoding process

The DCT-based decoding process consists of the following three basic steps:

1. Differential decoding the DC coefficient of a segment.
2. Decoding the AC coefficients of the segment
3. Determining the 16 FAP values of the segment using inverse discrete cosine transform (IDCT).

A uniform quantization step size is used for all AC coefficients. The quantization step size for AC coefficients is obtained as follows:

$$\text{qstep}[i] = \text{fap\_scale}[\text{fap\_quant\_inex}] * \text{DCTQP}[i]$$

where  $\text{DCTQP}[i]$  is the base quantization step size and its value is defined in subclause 6.3.10.10. The quantization step size of the DC coefficient is one-third of the AC coefficients. Different quantization step sizes are used for different FAPs.

The DCT-based decoding process is applied to all FAP segments except the viseme (FAP #1) and expression (FAP #2) parameters. The latter two parameters are differential decoded without transform. The decoding of viseme and expression segments are described at the end of this subclause.

For FAP #3 to FAP #68, the DC coefficient of an intra coded segment is stored as a 16-bit signed integer if its value is within the 16-bit range. Otherwise, it is stored as a 31-bit signed integer. For an inter coded segment, the DC coefficient of the previous segment is used as a prediction of the current DC coefficient. The prediction error is decoded using a Huffman table of 512 symbols. An "ESC" symbol, if obtained, indicates that the prediction error is

out of the range [-255, 255]. In this case, the next 16 bits extracted from the bitstream are represented as a signed 16-bit integer for the prediction error. If the value of the integer is equal to  $-256 \times 128$ , it means that the value of the prediction error is over the 16-bit range. Then the following 32 bits from the bitstream are extracted as a signed 32-bit integer, in twos complement format and the most significant bit first

The AC coefficients, for both inter and intra coded segments, are decoded using Huffman tables. The run-length code indicates the number of leading zeros before each non-zero AC coefficient. The run-length ranges from 0 to 14 and proceeds the code for the AC coefficient. The symbol 15 in the run length table indicates the end of non-zero symbols in a segment. Therefore, the Huffman table of the run-length codes contains 16 symbols. The values of non-zero AC coefficients are decoded in a way similar to the decoding of DC prediction errors but with a different Huffman table.

The bitstreams corresponding to viseme and expression segments are basically differential decoded without IDCT. For an intra coded segment, the quantized values of the first viseme\_select1, viseme\_select2, viseme\_blend, expression\_select1, expression\_select2, expression\_intensity1, and expression\_intensity2 within the segment are decoded using fixed length code. These first values are used as the prediction for the second viseme\_select1, viseme\_select2, ... etc of the segment and the prediction error are differential decoded using Huffman tables. For an inter coded segment, the last viseme\_select1, for example, of the previous decoded segment is used to predict the first viseme\_select1 of the current segment. In general, the decoded values (before inverse quantization) of differential coded viseme and expression parameter fields are obtained

```

byviseme_segment_select1q[k] = viseme_segment_select1q[k-1] +
    viseme_segment_select1q_diff[k] - 14
viseme_segment_select2q[k]     = viseme_segment_select2q[k-1] +
    viseme_segment_select2q_diff[k] - 14
viseme_segment_blendq[k]      = viseme_segment_blendq[k-1] +
    viseme_segment_blendq_diff[k] - 63
expression_segment_select1q[k] = expression_segment_select1q[k-1] +
    expression_segment_select1q_diff[k] - 6
expression_segment_select2q[k] = expression_segment_select2q[k-1] +
    expression_segment_select2q_diff[k] - 6
expression_segment_intensity1q[k] = expression_segment_intensity1q[k-1] +
    expression_segment_intensity1q_diff[k] - 63
expression_segment_intensity2q[k] = expression_segment_intensity2q[k-1] +
    expression_segment_intensity2q_diff[k] - 63

```

### 7.12.3 Decoding of the viseme parameter fap 1

Fourteen visemes have been defined for selection by the Viseme Parameter FAP 1, the definition is given in annex C. The viseme parameter allows two visemes from a standard set to be blended together. The viseme parameter is composed of a set of values as follows.

Table 7-17 -- Viseme parameter range

viseme () {	Range
viseme_select1	0-14
viseme_select2	0-14
viseme_blend	0-63
viseme_def	0-1
}	

Viseme\_blend is quantized (step size = 1) and defines the blending of viseme1 and viseme2 in the decoder by the following symbolic expression where viseme1 and 2 are graphical interpretations of the given visemes as suggested in the non-normative annex.

final viseme = (viseme 1) \* (viseme\_blend / 63) + (viseme 2) \* (1 - viseme\_blend / 63)

The viseme can only have impact on FAPs that are currently allowed to be interpolated.

If the viseme\_def bit is set, the current mouth FAPs can be used by the decoder to define the selected viseme in terms of a table of FAPs. This FAP table can be used when the same viseme is invoked again later for FAPs which must be interpolated.

#### 7.12.4 Decoding of the viseme parameter fap 2

The expression parameter allows two expressions from a standard set to be blended together. The expression parameter is composed of a set of values as follows.

Table 7-18 -- Expression parameter range

expression () {	Range
expression_select1	0-6
expression_intensity1	0-63
expression_select2	0-6
expression_intensity2	0-63
init_face	0-1
expression_def	0-1
}	

Expression\_intensity1 and expression\_intensity2 are quantized (step size = 1) and define excitation of expressions 1 and 2 in the decoder by the following equations where expressions 1 and 2 are graphical interpretations of the given expression as suggested by the non-normative reference:

final expression = expression1 \* (expression\_intensity1 / 63) + expression2 \* (expression\_intensity2 / 63)

The decoder displays the expressions according to the above formula as a superposition of the 2 expressions.

The expression can only have impact on FAPs that are currently allowed to be interpolated. If the init\_face bit is set, the neutral face may be modified within the neutral face constraints of mouth closure, eye opening, gaze direction, and head orientation before FAPs 3-68 are applied. If the expression\_def bit is set, the current FAPs can be used to define the selected expression in terms of a table of FAPs. This FAP table can then be used when the same expression is invoked again later.

#### 7.12.5 Fap masking

The face is animated by sending a stream of facial animation parameters. FAP masking, as indicated in the bitstream, is used to select FAPs. FAPs are selected by using a two level mask hierarchy. The first level contains two bit code for each group indicating the following options:

1. no FAPs are sent in the group.
2. a mask is sent indicating which FAPs in the group are sent. FAPs not selected by the group mask retain their previous value if any previously set value (not interpolated by decoder if previously set)
3. a mask is sent indicating which FAPs in the group are sent. FAPs not selected by the group mask retain must be interpolated by the decoder.
4. all FAPs in the group are sent.

#### 7.13 Output of the decoding process

This subclause describes the output of the theoretical model of the decoding process that decodes bitstreams conforming to this part of ISO/IEC 14496.

The visual decoding process input is one or more coded visual bitstreams (one for each of the layers). The visual layers are generally multiplexed by the means of a system stream that also contains timing information.

### 7.13.1 Video data

The output of the video decoding process is a series of VOPs that are normally the input of a display process. The order in which fields or VOPs are output by the decoding process is called the display order, and may be different from the coded order (when B-VOPs are used).

### 7.13.2 2D Mesh data

The output of the decoding process is a series of one or more mesh object planes. The mesh object planes are normally input to a compositor that maps the texture of a related video object or still texture object onto each mesh. The coded order and the composited order of the mesh object planes are identical.

### 7.13.3 Face animation parameter data

The output of the decoding process is a sequence of facial animation parameters. They are input to a display process that uses the parameters to animate a face object.


## 8 Visual-Systems Composition Issues

### 8.1 Temporal Scalability Composition

Background composition is used in forming the background region for objects at the enhancement layer of temporal scalability when the value of both enhancement\_type and background\_composition is one. This process is useful when the enhancement VOP corresponds to the partial region of the VOP belonging to the reference layer. In this process, the background of a current enhancement VOP is composed using the previous and the next VOPs in display order belonging to the reference layer.

Figure 8-1 shows the background composition for the current frame at the enhancement layer. The dotted line represents the shape of the selected object at the previous VOP in the reference layer (called “forward shape”). As the object moves, its shape at the next VOP in the reference layer is represented by a broken line (called “backward shape”).

For the region outside these shapes, the pixel value from the nearest VOP at the reference layer is used for the composed background. For the region occupied only by the forward shape, the pixel value from the next VOP at the reference layer is used for the composed frame. This area is shown as lightly shaded in Figure 8-1. On the other hand, for the region occupied only by the backward shape, pixel values from the previous VOP in the reference layer are used. This is the area shaded dark in Figure 8-1. For the region where the areas enclosed by these shapes overlap, the pixel value is given by padding from the surrounding area. The pixel value which is outside of the overlapped area should be filled before the padding operation.

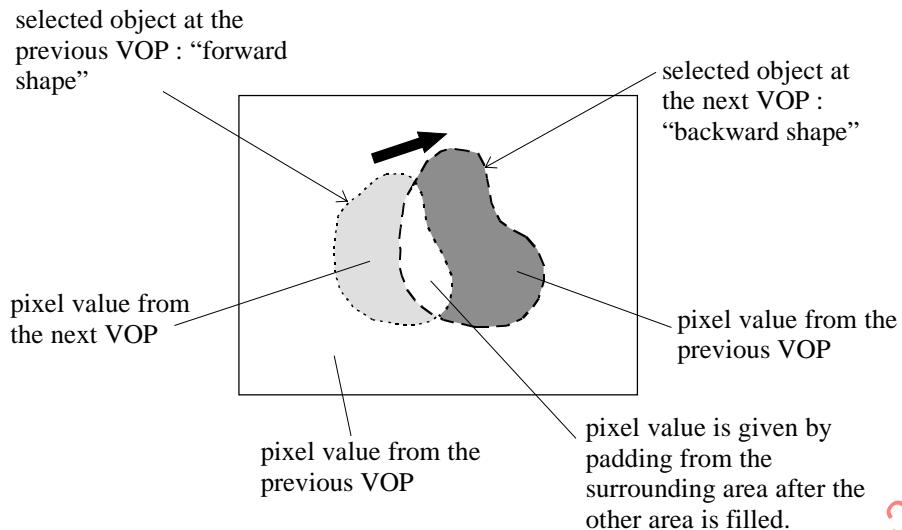

**Figure 8-1 -- Background composition**

The following process is a mathematical description of the background composition method.

```

If  $s(x,y,ta)=0$  and  $s(x,y,td)=0$ 
   $fc(x,y,t) = f(x,y,td)$   ( $|t-ta| > |t-td|$ )
   $fc(x,y,t) = f(x,y,ta)$   (otherwise),
if  $s(x,y,ta)=1$  and  $s(x,y,td)=0$ 
   $fc(x,y,t) = f(x,y,td)$ 
if  $s(x,y,ta)=0$  and  $s(x,y,td)=1$ 
   $fc(x,y,t) = f(x,y,ta)$ 
if  $s(x,y,ta)=1$  and  $s(x,y,td)=1$ 
  The pixel value of  $fc(x,y,t)$  is given by repetitive padding from the surrounding area.

```

where

$fc$  composed background  
 $f$  decoded VOP at the reference layer  
 $s$  shape information (alpha plane), 0: transparent, 1: opaque  
 $(x,y)$  the spatial coordinate  
 $t$  time of the current VOP  
 $ta$  time of the previous VOP  
 $td$  time of the next VOP

Two types of shape information,  $s(x, y, ta)$  and  $s(x, y, td)$ , are necessary for the background composition.  $s(x, y, ta)$  is called a "forward shape" and  $s(x, y, td)$  is called a "backward shape". If  $f(x, y, td)$  is the last VOP in the bitstream of the reference layer, it should be made by copying  $f(x, y, ta)$ . In this case, two shapes  $s(x, y, ta)$  and  $s(x, y, td)$  should be identical to the previous backward shape.

## 8.2 Sprite Composition

The static sprite technology enables to encode very efficiently video objects which content is expected not to vary in time along a video sequence. For example, it is particularly well suited to represent backgrounds of scenes (decor, landscapes) or logos.

A static sprite (sometimes referred as mosaic in the literature) is a frame containing spatial information for a single object, obtained by gathering information for this object throughout the sequence in which it appears. A static sprite can be a very large frame: it can correspond for instance to a wide angle view of a panorama.

The ISO/IEC 14496-2 syntax defines a dedicated coding mode to obtain VOPs from static sprites: the so-called "S-VOPs". S-VOPs are extracted from a static sprite using a warping operation consisting in a global spatial transformation driven by few motion parameters (0,2,4, 6 or 8).

For composition with other VOPs, there are no special rules for S-VOPs. However, it is classical to use S-VOPs as background objects over which “classical” objects are superimposed.

### 8.3 Mesh Object Composition

A Mesh Object represents the geometry of a sequence of 2D triangular meshes. This data can be used along with separately coded image texture data to render texture-mapped images, e.g., by the composition process as defined in ISO/IEC 14496-1. A Mesh Object stream may be contained in part of a BIFS animation stream, as defined in ISO/IEC 14496-1. In terminals implementing mesh animation functionality using both ISO/IEC 14496-1 and this part of ISO/IEC 14496, the decoded mesh data is used to update the appropriate fields of a BIFS IndexedFaceSet2D node, defined in ISO/IEC 14496-1, for composition purposes. In this case, the appropriate fields of the IndexedFaceSet2D BIFS node are updated as described in the following.

a) The coordinates of the mesh points (vertices) are obtained from the output of the Mesh Object decoder. The Mesh Object uses a pixel-based local coordinate system with x-axis pointing to the right and y-axis pointing down. However, ISO/IEC 14496-1 specifies a coordinate system with y-axis pointing up. Therefore, a simple coordinate transform shall be applied to the y-coordinates of mesh points to ensure the proper orientation of the object after composition. The y-coordinate  $y_n$  of a decoded mesh node point  $n$  shall be transformed as follows:

$$Y_n = -y_n,$$

where  $Y_n$  is the y-coordinate of this mesh node point in the coordinate system as specified in ISO/IEC 14496-1. The origin of this object is at the top-left point. The same transform shall be applied to the coordinates of node points of each Mesh Object Plane (MOP).

b) The coordinate indices are the indices of the mesh points forming faces (triangles) obtained from the output of the Mesh Object decoder. All decoded faces are triangles. The topology of a Mesh Object is constant starting from an intra-coded MOP, throughout a sequence of predictive-coded MOPs (until the next intra-coded MOP); therefore, the coordinate indices shall be updated only for intra-coded MOPs.

c) Texture coordinates for mapping textures onto the mesh geometry are computed from the decoded node point locations of an intra-coded Mesh Object Plane and its bounding rectangle. Let  $x_{\min}$ ,  $y_{\min}$  and  $x_{\max}$ ,  $y_{\max}$  define the bounding rectangle of all node points of an intra-coded MOP. Then the width  $w$  and height  $h$  of the texture map shall be:

$$w = \text{ceil}(x_{\max}) - \text{floor}(x_{\min}),$$

$$h = \text{ceil}(y_{\max}) - \text{floor}(y_{\min}).$$

A texture coordinate pair  $(s_n, t_n)$  is computed for each node point  $p_n = (x_n, y_n)$  as follows:

$$s_n = (x_n - \text{floor}(x_{\min}))/w,$$

$$t_n = 1.0 - (y_n - \text{floor}(y_{\min}))/h.$$

The topology of a Mesh Object is constant starting from an intra-coded MOP, throughout a sequence of predictive-coded MOPs (until the next intra-coded MOP); therefore, the texture coordinates shall be updated only for intra-coded MOPs.

d) The texture coordinate indices are identical to the coordinate indices.

## 9 Profiles and Levels

NOTE In this part of ISO/IEC 14496 the word “profile” is used as defined below. It should not be confused with other definitions of “profile” and in particular it does not have the meaning that is defined by ISO/IEC JTC1/SGFS.

Profiles and levels provide a means of defining subsets of the syntax and semantics of this part of ISO/IEC 14496 and thereby the decoder capabilities required to decode a particular bitstream. A profile is a defined sub-set of the entire bitstream syntax that is defined by this part of ISO/IEC 14496. A level is a defined set of constraints imposed on parameters in the bitstream. Conformance tests will be carried out against defined profiles at defined levels.

The purpose of defining conformance points in the form of profiles and levels is to facilitate bitstream interchange among different applications. Implementers of this part of ISO/IEC 14496 are encouraged to produce decoders and bitstreams which correspond to those defined conformance regions. The discretely defined profiles and levels are the means of bitstream interchange between applications of this part of ISO/IEC 14496.

In this clause the constrained parts of the defined profiles and levels are described. All syntactic elements and parameter values which are not explicitly constrained may take any of the possible values that are allowed by this part of ISO/IEC 14496. In general, a decoder shall be deemed to be conformant to a given profile at a given level if it is able to properly decode all allowed values of all syntactic elements as specified by that profile at that level.

## 9.1 Visual Object Types

The following table lists the tools included in each of the Object Types. Bitstreams that represent a particular object corresponding to an Object Type shall not use any of the tools for which the table does not have an 'X'.

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999

Table 9-1 -- Tools and Visual Object Types

Visual Tools	Visual Object Types								
	Simple	Core	Main	Simple Scalable	N-bit	Animated 2D Mesh	Basic Animated Texture	Still Scalable Texture	Simple Face
Basic <ul style="list-style-type: none"> <li>• I-VOP, P-VOP</li> <li>• AC/DC Prediction</li> <li>• 4-MV, Unrestricted MV</li> </ul>	X	X	X	X	X	X			
Error resilience <ul style="list-style-type: none"> <li>• Slice Resynchronization</li> <li>• Data Partitioning</li> <li>• Reversible VLC</li> </ul>	X	X	X	X	X	X			
Short Header	X	X	X		X	X			
B-VOP		X	X	X	X	X			
P-VOP with OBMC (Texture)									
Method 1/Method 2 Quantization		X	X		X	X			
P-VOP based temporal scalability <ul style="list-style-type: none"> <li>• Rectangular</li> <li>• Arbitrary Shape</li> </ul>		X	X		X	X			
Binary Shape		X	X		X	X	X		
Grey Shape			X						
Interlace			X						
Sprite			X						
Temporal Scalability (Rectangular)				X					
Spatial Scalability (Rectangular)				X					
N-Bit					X				
Scalable Still Texture						X	X	X	
2D Dynamic Mesh with uniform topology						X	X		
2D Dynamic Mesh with Delaunay topology						X			
Facial Animation Parameters									X

NOTE 1 "Binary Shape Coding" includes constant alpha.

NOTE 2 The parameters are restricted as follows for the tool "P-VOP based temporal scalability Arbitrary Shape":

- ref\_select\_code shall be either '00' or '01'.
- reference layer shall be either I-VOP or P-VOP.
- load\_backward\_shape shall be '0' and background composition is not performed.

## 9.2 Visual Profiles

Decoders that conform to a Profile shall be able to decode all objects that comply to the Object Types for which the table lists an 'X'.

Table 9-2 -- Visual Profiles

Object Types Profiles	Simple	Core	Main	Simple Scalable	N-Bit	Animated 2D Mesh	Basic Animated Texture	Scalable Texture	Simple Face
1. Simple	X								
2. Simple Scalable	X			X					
3. Core	X	X							
4. Main	X	X	X					X	
5. N-Bit	X	X			X				
6. Hybrid	X	X				X	X	X	X
7. Basic Animated Texture							X	X	X
8. Scalable Texture								X	
9. Simple FA									X

Note that the Profiles can be grouped into three categories: Natural Visual (Profile numbers 1-5), Synthetic Visual (Profile numbers 8 and 9), and Synthetic/Natural Hybrid Visual (Profile numbers 6 and 7).

## 9.3 Visual Profiles@Levels

### 9.3.1 Natural Visual

The table that describes the natural visual profiles is given in annex N.

### 9.3.2 Synthetic Visual

#### 9.3.2.1 Scalable Texture Profile

Table 9-3 -- Scalable texture profile levels

Profile	Levels	Default Wavelet Filter	Download Filter, length	Maximum number of Decomposi tion Levels	Typical Visual Session Size <sup>1</sup>	Maximum Qp value	Maximum number of pixels/ Session
Scalable Texture	L3	Float, Integer	ON, 24	10	8192x8192	12 bits	67108864

Scalable Texture	L2	Integer	ON, 18	8	2048x2048	10 bits	4194304
Scalable Texture	L1	Integer	OFF	5	704x576	8 bits	405504

(1) This column is for informative use only. It provides an example configuration of the Maximum number of pixels/Session.

### 9.3.2.2 Simple Face Animation Profile

All ISO/IEC 14496-2 facial animation decoders (for all object types) are required to generate at their output a facial model including all the feature points defined in this part of ISO/IEC 14496, even if some of the features points will not be affected by any information received from the encoder.

The Simple Face object is not required to implement the viseme\_def/expression\_def functionality.

Level 1:

- number of objects: 1,
- The total FAP decode frame-rate in the bitstream shall not exceed 72 Hz ,
- The decoder shall be capable of a face model rendering update of at least 15 Hz, and
- Maximum bitrate 16 kbit/s.

Level 2:

- maximum number of objects: 4,
- The FAP decode frame-rate in the bitstream shall not exceed 72 Hz (this means that the FAP decode framerate is to be shared among the objects),
- The decoder shall be capable of rendering the face models with the update rate of at least 60Hz, sharable between faces, with the constraint that the update rate for each individual face is not required to exceed 30Hz, and
- Maximum bitrate 32 kbit/s.

### 9.3.3 Synthetic/Natural Hybrid Visual

The *Levels* of the Profiles which support both Natural Visual Object Types and Synthetic Visual Object Types are specified by giving bounds for the natural objects and for the synthetic objects. Parameters like bitrate can be combined across natural and synthetic objects.

#### 9.3.3.1 Basic Animated Texture Profile

Level 1 = Simple Facial Animation Profile @ Level 1 + Scalable Texture @ Level 1 + the following restrictions on Basic Animated Texture object types:

- Maximum number of Mesh objects (with uniform topology): 4,
- Maximum total number of nodes (vertices) in Mesh objects: 480, ( = 4 x nr. of nodes of a uniform mesh covering a QCIF image with 16x16 pixel elements),
- Maximum frame-rate of a Mesh object: 30 Hz, and
- Maximum bitrate of Mesh objects: 128 kbit/sec.

Level 2 = Simple Facial Animation Profile @ Level 2 + Scalable Texture @ Level 2 + the following restrictions on Basic Animated Texture object types:

- Maximum number of Mesh objects (with uniform topology): 8,
- Maximum total number of nodes (vertices) in Mesh objects: 1748, ( = 4 x nr. of nodes of a uniform mesh covering a CIF image with 16x16 pixel elements),
- Maximum frame-rate of a Mesh object: 60 Hz, and
- Maximum bitrate of Mesh objects: 128 kbit/sec.

### 9.3.3.2 Hybrid Profile

Level 1 = Core Visual Profile @ Level 1 + Basic Animated Texture Profile @ Level 1 + the following restrictions on Animated 2D Mesh object types:

- Maximum number of Mesh objects (with uniform or Delaunay topology): 4  
( = maximum number of objects in visual session)
- Maximum total number of nodes (vertices) in Mesh objects: 480  
( = 4 x nr. of nodes of a uniform mesh covering a QCIF image with 16x16 pixel elements)
- Maximum frame-rate of a Mesh object: 30 Hz  
( = maximum frame-rate of video object)
- Maximum bitrate of Mesh objects: 64 kbit/sec.

Level 2 = Core Visual Profile @ Level 2 + Basic Animated Texture Profile @ Level 2 + the following restrictions on Animated 2D Mesh object types:

- Maximum number of Mesh objects (with uniform or Delaunay topology): 8  
( = maximum number of objects in visual session)
- Maximum total number of nodes (vertices) in Mesh objects: 1748  
( = 4 x nr. of nodes of a uniform mesh covering a CIF image with 16x16 pixel elements)
- Maximum frame-rate of a Mesh object: 60 Hz  
( = 2 x the maximum frame-rate of video object)
- Maximum bitrate of Mesh objects: 128 kbit/sec.

## Annex A

### (normative)

## Coding transforms

### A.1 Discrete cosine transform for video texture

The NxN two dimensional DCT is defined as:

$$F(u, v) = \frac{2}{N} C(u) C(v) \sum_{x=0}^{N-1} \sum_{y=0}^{N-1} f(x, y) \cos \frac{(2x+1)u\pi}{2N} \cos \frac{(2y+1)v\pi}{2N}$$

with  $u, v, x, y = 0, 1, 2, \dots, N-1$

where  $x, y$  are spatial coordinates in the sample domain

$u, v$  are coordinates in the transform domain

$$C(u), C(v) = \begin{cases} \frac{1}{\sqrt{2}} & \text{for } u, v = 0 \\ 1 & \text{otherwise} \end{cases}$$

The inverse DCT (IDCT) is defined as:

$$f(x, y) = \frac{2}{N} \sum_{u=0}^{N-1} \sum_{v=0}^{N-1} C(u) C(v) F(u, v) \cos \frac{(2x+1)u\pi}{2N} \cos \frac{(2y+1)v\pi}{2N}$$

If each pixel is represented by  $n$  bits per pixel, the input to the forward transform and output from the inverse transform is represented with  $(n+1)$  bits. The coefficients are represented in  $(n+4)$  bits. The dynamic range of the DCT coefficients is  $[-2^{n+3} : +2^{n+3} - 1]$ .

The N by N inverse discrete transform shall conform to IEEE Standard Specification for the Implementations of 8 by 8 Inverse Discrete Cosine Transform, Std 1180-1990, December 6, 1990.

NOTE 1 Subclause 2.3 Std 1180-1990 "Considerations of Specifying IDCT Mismatch Errors" requires the specification of periodic intra-picture coding in order to control the accumulation of mismatch errors. Every macroblock is required to be refreshed before it is coded 132 times as predictive macroblocks. Macroblocks in B-pictures (and skipped macroblocks in P-pictures) are excluded from the counting because they do not lead to the accumulation of mismatch errors. This requirement is the same as indicated in 1180-1990 for visual telephony according to ITU-T Recommendation H.261.

NOTE 2 Whilst the IEEE IDCT standard mentioned above is a necessary condition for the satisfactory implementation of the IDCT function it should be understood that this is not sufficient. In particular attention is drawn to the following sentence from subclause 5.4: "Where arithmetic precision is not specified, such as the calculation of the IDCT, the precision shall be sufficient so that significant errors do not occur in the final integer values."

### A.2 Discrete wavelet transform for still texture

#### A.2.1 Adding the mean

Before applying the inverse wavelet transform, the mean of each color component ("mean\_y", "mean\_u", and "mean\_v") is added to the all wavelet coefficients of dc band.

### A.2.2 Wavelet filter

A 2-D separable inverse wavelet transform is used to synthesize the still texture. The default wavelet composition is performed using Daubechies (9,3) tap biorthogonal filter bank. The inverse DWT is performed either in floating or integer operations depending on the field “wavelet\_filter\_type”, defined in the syntax.

The floating filter coefficients are:

<b>Lowpass</b>	<b>g[ ] =</b>	
[ 0.35355339059327	0.70710678118655	0.35355339059327]

<b>Highpas</b>	<b>h[ ] =</b>	
[ 0.03314563036812	0.06629126073624	-0.17677669529665
-0.41984465132952	0.99436891104360	-0.41984465132952
-0.17677669529665	0.06629126073624	0.03314563036812 ]

The integer filter coefficients are:

<b>Lowpass</b>	<b>g[ ] =</b>	
32	64	32

<b>Highpass</b>	<b>h[ ] =</b>	
3	6	-16
-38	90	-38
-16	6	3

The synthesis filtering operation is defined as follows:

$$y[n] = \sum_{i=-1}^1 L[n+i]*g[i+1] + \sum_{i=-4}^4 H[n+i]*h[i+4]$$

where

- $n = 0, 1, \dots N-1$ , and  $N$  is the number of output points;
- $L[2*i] = xl[i]$  and  $L[2*i+1] = 0$  for  $i=0,1,\dots,N/2-1$ , and  $\{xl[i]\}$  are the  $N/2$  input wavelet coefficients in the low-pass band;
- $H[2*i+1] = xh[i]$  and  $H[2*i] = 0$  for  $i=0,1,\dots,N/2-1$ , and  $\{xh[i]\}$  are the  $N/2$  input wavelet coefficients in the high-pass band.

NOTE 1 the index range for  $h[]$  is from 0 to 8;

NOTE 2 the index range for  $g[]$  is from 0 to 2;

NOTE 3 the index range for  $L[]$  is from -1 to  $N$ ;

NOTE 4 the index range for  $H[]$  is from -4 to  $N+3$ ; and

NOTE 5 the values of  $L[]$  and  $H[]$  for indexes less than 0 or greater than  $N-1$  are obtained by symmetric extension described in the following subclause.

In the case of integer wavelet, the outputs at each composition level are scaled down with dividing by 8096 with rounding to the nearest integer.

### A.2.3 Symmetric extension

A symmetric extension of the input wavelet coefficients is performed and the up-sampled and extended wavelet coefficients are generated. Note that the extension process shown below is an example when the extension is performed before up-sampling and that only the generated coefficients are specified. Two types of symmetric extensions are needed, both mirror the boundary pixels. Type A replicates the edge pixel and Type B does not replicate the edge pixel. This is illustrated in Figure A-1 and Figure A-2, where the edge pixel is indicated by  $z$ . The types of extension for the input data to the wavelet filters are shown in Table A-1.

Type A	...v w x y z   z y x w v...
Type B	.....v w x y   z y x w v...

Figure A-1 -- Symmetrical extensions at the leading boundary

Type A	...v w x y z   <b>z y x w v...</b>
Type B	....v w x y z   <b>y x w v....</b>

Figure A-2 -- Symmetrical extensions at the trailing boundary

Table A-1 -- Extension method for the input data to the synthesis filters

	boundary	Extension
lowpass input xl[]	leading	TypeB
to 3-tap filter g[]	trailing	TypeA
highpass input xh[]	leading	TypeA
to 9-tap filter h[]	trailing	TypeB

The generated up-sampled and extended wavelet coefficients L[] and H[] are eventually specified as follows:

low-pass band: ... 0 L[2] 0 | **L[0] 0 L[2] 0** ... L[N-4] 0 L[N-2] 0 | L[N-2] 0 L[N-4] 0 ...  
 high-pass band: ... H[3] 0 H[1] | **0 H[1] 0 H[3]** ... 0 H[N-3] 0 H[N-1] | 0 H[N-1] 0 H[N-3]...

#### A.2.4 Decomposition level

The number of decomposition levels of the luminance component is defined in the input bitstream. The number of decomposition levels for the chrominance components is one level less than that of the luminance components. If texture\_object\_layer width or texture\_object\_layer height cannot be divisible by ( 2 ^ decomposition\_levels ), then shape adaptive wavelet is applied.

#### A.2.5 Shape adaptive wavelet filtering and symmetric extension

##### A.2.5.1 Shape adaptive wavelet

The 2-D inverse shape adaptive wavelet transform uses the same wavelet filter as specified in Table A-1. According to the shape information, segments of consecutive output points are reconstructed and put into the correct locations. The filtering operation of shape adaptive wavelet is a generalization of that for the regular wavelet. The generalization allows the number of output points to be an odd number as well as an even number. Relative to the bounding rectangle, the starting point of the output is also allowed to be an odd number as well as an even number according to the shape information. Within the generalized wavelet filtering, the regular wavelet filtering is a special case where the number of output points is an even number and the starting point is an even number (0) too. Another special case is for reconstruction of rectangular textures with an arbitrary size where the number of output points may be even or odd and the starting point is always even (0).

The same synthesis filtering is applied for shape-adaptive wavelet composition, i.e:

$$y[n] = \sum_{i=-1}^1 L[n+i]*g[i+1] + \sum_{i=-4}^4 H[n+i]*h[i+4]$$

where

- $n = 0, 1, \dots N-1$ , and  $N$  is the number of output points;
- $L[2*i+s] = xl[i]$  and  $L[2*i+1-s] = 0$  for  $i=0,1,\dots,(N+1-s)/2-1$ , and  $\{xl[i]\}$  are the  $(N+1-s)/2$  input wavelet coefficients in the low-pass band;
- $H[2*i+1-s] = xh[i]$  and  $H[2*i+s] = 0$  for  $i=0,1,\dots,(N+s)/2-1$ , and  $\{xh[i]\}$  are the  $(N+s)/2$  input wavelet coefficients in the high-pass band.

The only difference from the regular synthesis filtering is to introduce a binary parameter  $s$  in up-sampling, where  $s = 0$  if the starting point of the output is an even number and  $s = 1$  if the starting point of the output is an odd number.

The symmetric extension for the generalized synthesis filtering is specified in Table A-2 if  $N$  is an even number and in Table A-3 if  $N$  is an odd number.

**Table A-2 -- Extension method for the data to the synthesis wavelet filters if  $N$  is even**

	<b>Boundary</b>	<b>extension (s=0)</b>	<b>extension(s=1)</b>
lowpass input $xl[]$	Leading	TypeB	TypeA
to 3-tap filter $g[]$	Trailing	TypeA	TypeB
highpass input $xh[]$	Leading	TypeA	TypeB
to 9-tap filter $h[]$	Trailing	TypeB	TypeA

**Table A-3 -- Extension method for the data to the synthesis wavelet filters if  $N$  is odd**

	<b>Boundary</b>	<b>extension(s=0)</b>	<b>extension(s=1)</b>
lowpass input $xl[]$	Leading	TypeB	TypeA
to 3-tap filter $g[]$	Trailing	TypeB	TypeA
highpass input $xh[]$	Leading	TypeA	TypeB
to 9-tap filter $h[]$	Trailing	TypeA	TypeB

## Annex B

(normative)

### Variable length codes and arithmetic decoding

#### B.1 Variable length codes

##### B.1.1 Macroblock type

**Table B-1 -- Macroblock types and included data elements for I- and P-VOPs in combined motion-shape-texture coding**

VOP type	mb type	Name	not_coded	mcbpc	cbpy	dquant	mvd	mvd <sub>2-4</sub>
P	not coded	-	1					
P	0	inter	1	1	1		1	
P	1	inter+q	1	1	1	1	1	
P	2	inter4v	1	1	1		1	1
P	3	intra	1	1	1			
P	4	intra+q	1	1	1	1		
P	stuffing	-	1	1				
I	3	intra		1	1			
I	4	intra+q		1	1	1		
I	stuffing	-		1				
S (update)	not_coded	-	1					
S (update)	0	inter	1	1	1			
S (update)	1	inter+q	1	1	1	1		
S (update)	3	intra	1	1	1			
S (update)	4	intra+q	1	1	1	1		
S (update)	stuffing	-	1	1				
S (piece)	3	intra		1	1			
S (piece)	4	intra+q		1	1	1		
S (piece)	stuffing	-		1				

NOTE “1” means that the item is present in the macroblock

S (piece) indicates S-VOPs with low\_latency\_sprite\_enable == 1 and sprite\_transmit\_mode == “piece”

S (update) indicates S-VOPs with low\_latency\_sprite\_enable == 1 and sprite\_transmit\_mode == “update”

**Table B-2 -- Macroblock types and included data elements for a P-VOP (scalability && ref\_select\_code == ‘11’)**

VOP Type	mb_type	Name	not_coded	mcbpc	cbpy	dquant	MVD	MVD <sub>2-4</sub>
P	not coded	-	1					
P	0	INTER	1	1	1			
P	1	INTER+Q	1	1	1	1		
P	3	INTRA	1	1	1			
P	4	INTRA+Q	1	1	1	1		
P	stuffing	-	1	1				

NOTE “1” means that the item is present in the macroblock

Table B-3 -- VLC table for modb in combined motion-shape-texture coding

Code	cbpb	mb_type
1		
01		1
00	1	1

Table B-4 -- mb\_type and included data elements in coded macroblocks in B-VOPs (ref\_select\_code != '00'||scalability=='0') for combined motion-shape-texture coding

Code	dquant	mvd <sub>f</sub>	mvd <sub>b</sub>	mvdb	mb_type
1				1	direct
01	1	1	1		interpolate mc+q
001	1		1		backward mc+q
0001	1	1			forward mc+q

Table B-5 -- mb\_type and included data elements in coded macroblocks in B-VOPs (ref\_select\_code == '00'&amp;&amp;scalability=='0') for combined motion-shape-texture coding

Code	dquant	mvd <sub>f</sub>	mvd <sub>b</sub>	mb_type
01	1	1		interpolate mc+q
001	1			backward mc+q
1	1	1		forward mc+q

### B.1.2 Macroblock pattern

Table B-6 -- VLC table for mcbpc for I-VOPs in combined-motion-shape-texture coding and S-VOPs with low\_latency\_sprite\_enable==1 and sprite\_transmit\_mode=="piece"

Code	mbtype	cbpc (56)
1	3	00
001	3	01
010	3	10
011	3	11
0001	4	00
0000 01	4	01
0000 10	4	10
0000 11	4	11
0000 0000 1	Stuffing	--

Table B-7 -- VLC table for mcbpc for P-VOPs in combined-motion-shape-texture and S-VOPs with low\_latency\_sprite\_enable==1 and sprite\_transmit\_mode=="update"

Code	MB type	cbpc (56)
1	0	00
0011	0	01
0010	0	10
0001 01	0	11

011	1	00
0000 111	1	01
0000 110	1	10
0000 0010 1	1	11
010	2	00
0000 101	2	01
0000 100	2	10
0000 0101	2	11
0001 1	3	00
0000 0100	3	01
0000 0011	3	10
0000 011	3	11
0001 00	4	00
0000 0010 0	4	01
0000 0001 1	4	10
0000 0001 0	4	11
0000 0000 1	Stuffing	--

Table B-8 -- VLC table for cbpy in the case of four non-transparent macroblocks

Code	cbpy(intra-MB) (12 34)	cbpy(inter-MB), (12 34)
0011	00	11
	00	11
0010 1	00	11
	01	10
0010 0	00	11
	10	01
1001	00	11
	11	00
0001 1	01	10
	00	11
0111	01	10
	01	10
0000 10	01	10
	10	01
1011	01	10
	11	00
0001 0	10	01
	00	11
0000 11	10	01
	01	10
0101	10	01
	10	01
1010	10	01
	11	00
0100	11	00
	00	11
1000	11	00

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999

	01	10
0110	11	00
	10	01
11	11	00
	11	00

Table B-9 -- VLC table for cbpy in the case of three non transparent blocks

Code	cbpy (intra-MB)	cbpy (inter-MB)
011	000	111
000001	001	110
00001	010	101
010	011	100
00010	100	011
00011	101	010
001	110	001
1	111	000

Table B-10 -- VLC table for cbpy in the case of two non transparent blocks

Code	cbpy (intra-MB)	cbpy (inter-MB)
0001	00	11
001	01	10
01	10	01
1	11	00

Table B-11 -- VLC table for cbpy in the case of one non transparent block

Code	cbpy (intra-MB)	cbpy (inter-MB)
01	0	1
1	1	0

### B.1.3 Motion vector

Table B-12 -- VLC table for MVD

Codes	Vector differences
0000 0000 0010 1	-16
0000 0000 0011 1	-15.5
0000 0000 0101	-15
0000 0000 0111	-14.5
0000 0000 1001	-14
0000 0000 1011	-13.5
0000 0000 1101	-13
0000 0000 1111	-12.5

0000 0001 001	-12
0000 0001 011	-11.5
0000 0001 101	-11
0000 0001 111	-10.5
0000 0010 001	-10
0000 0010 011	-9.5
0000 0010 101	-9
0000 0010 111	-8.5
0000 0011 001	-8
0000 0011 011	-7.5
0000 0011 101	-7
0000 0011 111	-6.5
0000 0100 001	-6
0000 0100 011	-5.5
0000 0100 11	-5
0000 0101 01	-4.5
0000 0101 11	-4
0000 0111	-3.5
0000 1001	-3
0000 1011	-2.5
0000 1111	-2
0001 1	1.5
0011	-1
011	-0.5
1	0
010	0.5
0010	1
0001 0	1.5
0000 110	2
0000 1010	2.5
0000 1000	3
0000 0110	3.5
0000 0101 10	4
0000 0101 00	4.5
0000 0100 10	5
0000 0100 010	5.5
0000 0100 000	6
0000 0011 110	6.5
0000 0011 100	7
0000 0011 010	7.5
0000 0011 000	8
0000 0010 110	8.5
0000 0010 100	9
0000 0010 010	9.5
0000 0010 000	10
0000 0001 110	10.5
0000 0001 100	11
0000 0001 010	11.5
0000 0001 000	12
0000 0000 1110	12.5

IECNORM.COM. Click to view the full PDF of ISO/IEC 14496-2:1999

0000 0000 1100	13
0000 0000 1010	13.5
0000 0000 1000	14
0000 0000 0110	14.5
0000 0000 0100	15
0000 0000 0011 0	15.5
0000 0000 0010 0	16

#### B.1.4 DCT coefficients

**Table B-13 -- Variable length codes for dct\_dc\_size\_luminance**

Variable length code	dct_dc_size_luminance
011	0
11	1
10	2
010	3
001	4
0001	5
0000 1	6
0000 01	7
0000 001	8
0000 0001	9
0000 0000 1	10
0000 0000 01	11
0000 0000 001	12

**Table B-14 -- Variable length codes for dct\_dc\_size\_chrominance**

Variable length code	dct_dc_size_chrominance
11	0
10	1
01	2
001	3
0001	4
0000 1	5
0000 01	6
0000 001	7
0000 0001	8
0000 0000 1	9
0000 0000 01	10
0000 0000 001	11
0000 0000 0001	12

Table B-15 -- Differential DC additional codes

Additional code	Differential DC	Size
000000000000 to 011111111111 *	-2048 to -4095	12
000000000000 to 011111111111 *	-1024 to -2047	11
000000000000 to 0111111111 *	-512 to -1023	10
0000000000 to 0111111111 *	-256 to -511	9
00000000 to 01111111	-255 to -128	8
00000000 to 01111111	-127 to -64	7
00000000 to 01111111	-63 to -32	6
00000000 to 01111111	-31 to -16	5
00000000 to 01111111	-15 to -8	4
00000000 to 01111111	-7 to -4	3
00000000 to 01111111	-3 to -2	2
00000000 to 01111111	-1	1
00000000 to 01111111	0	0
00000000 to 01111111	1	1
10 to 11	2 to 3	2
100 to 111	4 to 7	3
1000 to 1111	8 to 15	4
10000 to 11111	16 to 31	5
100000 to 111111	32 to 63	6
1000000 to 1111111	64 to 127	7
10000000 to 11111111	128 to 255	8
100000000 to 111111111 *	256 to 511	9
1000000000 to 1111111111 *	512 to 1023	10
10000000000 to 11111111111 *	1024 to 2047	11
100000000000 to 111111111111 *	2048 to 4095	12

In cases where `dct_dc_size` is greater than 8, marked '\*' in Table B-15, a marker bit is inserted after the `dct_dc_additional_code` to prevent start code emulations.

Table B-16 -- VLC Table for Intra Luminance and Chrominance TCOEF

VLC CODE	LAST	RUN	LEVEL	VLC CODE	LAST	RUN	LEVEL
10s	0	0	1	0111 s	1	0	1
1111 s	0	0	3	0000 1100 1s	0	11	1
0101 01s	0	0	6	0000 0000 101s	1	0	6
0010 111s	0	0	9	0011 11s	1	1	1
0001 1111 s	0	0	10	0000 0000 100s	1	0	7
0001 0010 1s	0	0	13	0011 10s	1	2	1
0001 0010 0s	0	0	14	0011 01s	0	5	1
0000 1000 01s	0	0	17	0011 00s	1	0	2
0000 1000 00s	0	0	18	0010 011s	1	5	1
0000 0000 111s	0	0	21	0010 010s	0	6	1
0000 0000 110s	0	0	22	0010 001s	1	3	1

0000 0100 000s	0	0	23
110s	0	0	2
0101 00s	0	1	2
0001 1110 s	0	0	11
0000 0011 11s	0	0	19
0000 0100 001s	0	0	24
0000 0101 0000s	0	0	25
1110 s	0	1	1
0001 1101 s	0	0	12
0000 0011 10s	0	0	20
0000 0101 0001s	0	0	26
0110 1s	0	0	4
0001 0001 1s	0	0	15
0000 0011 01s	0	1	7
0110 0s	0	0	5
0001 0001 0s	0	4	2
0000 0101 0010s	0	0	27
0101 1s	0	2	1
0000 0011 00s	0	2	4
0000 0101 0011s	0	1	9
0100 11s	0	0	7
0000 0010 11s	0	3	4

0010 000s	1	4	1
0001 1010 s	1	9	1
0001 1001 s	0	8	1
0001 1000 s	0	9	1
0001 0111 s	0	10	1
0001 0110 s	1	0	3
0001 0101 s	1	6	1
0001 0100 s	1	7	1
0001 0011 s	1	8	1
0000 1100 0s	0	12	1
0000 1011 1s	1	0	4
0000 1011 0s	1	1	2
0000 1010 1s	1	10	1
0000 1010 0s	1	11	1
0000 1001 1s	1	12	1
0000 1001 0s	1	13	1
0000 1000 1s	1	14	1
0000 0001 11s	0	13	1
0000 0001 10s	1	0	5
0000 0001 01s	1	1	3
0000 0001 00s	1	2	2
0000 0100 100s	1	3	2

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999

VLC CODE	LAST	RUN	LEVEL
0000 0101 0100s	0	6	3
0100 10s	0	0	8
0000 0010 10s	0	4	3
0100 01s	0	3	1
0000 0010 01s	0	8	2
0100 00s	0	4	1
0000 0010 00s	0	5	3
0010 110s	0	1	3
0000 0101 0101s	0	1	10
0010 101s	0	2	2
0010 100s	0	7	1
0001 1100 s	0	1	4
0001 1011 s	0	3	2
0001 0000 1s	0	0	16
0001 0000 0s	0	1	5
0000 1111 1s	0	1	6
0000 1111 0s	0	2	3
0000 1110 1s	0	3	3
0000 1110 0s	0	5	2
0000 1101 1s	0	6	2
0000 1101 0s	0	7	2
0000 0100 010s	0	1	8
0000 0100 011s	0	9	2
0000 0101 0110s	0	2	5
0000 0101 0111s	0	7	3

VLC CODE	LAST	RUN	LEVEL
0000 0100 101s	1	4	2
0000 0100 110s	1	15	1
0000 0100 111s	1	16	1
0000 0101 1000s	0	14	1
0000 0101 1001s	1	0	8
0000 0101 1010s	1	5	2
0000 0101 1011s	1	6	2
0000 0101 1100s	1	17	1
0000 0101 1101s	1	18	1
0000 0101 1110s	1	19	1
0000 0101 1111s	1	20	1
0000 011	escape		

IECNORM.COM: Click to view the full PDF of ISO/IEC 14496-2:1999

Table B-17 -- VLC table for Inter Luminance and Chrominance TCOEF

VLC CODE	LAST	RUN	LEVEL
10s	0	0	1
1111 s	0	0	2
0101 01s	0	0	3
0010 111s	0	0	4
0001 1111 s	0	0	5
0001 0010 1s	0	0	6
0001 0010 0s	0	0	7
0000 1000 01s	0	0	8
0000 1000 00s	0	0	9
0000 0000 111s	0	0	10
0000 0000 110s	0	0	11
0000 0100 000s	0	0	12
110s	0	1	1
0101 00s	0	1	2
0001 1110 s	0	1	3
0000 0011 11s	0	1	4
0000 0100 001s	0	1	5
0000 0101 0000s	0	1	6
1110 s	0	2	1
0001 1101 s	0	2	2
0000 0011 10s	0	2	3
0000 0101 0001s	0	2	4
0110 1s	0	3	1
0001 0001 1s	0	3	2
0000 0011 01s	0	3	3
0110 0s	0	4	1
0001 0001 0s	0	4	2
0000 0101 0010s	0	4	3
0101 1s	0	5	1
0000 0011 00s	0	5	2
0000 0101 0011s	0	5	3
0100 11s	0	6	1
0000 0010 11s	0	6	2

VLC CODE	LAST	RUN	LEVEL
0111 s	1	0	1
0000 1100 1s	1	0	2
0000 0000 101s	1	0	3
0011 11s	1	1	1
0000 0000 100s	1	1	2
0011 10s	1	2	1
0011 01s	1	3	1
0011 00s	1	4	1
0010 011s	1	5	1
0010 010s	1	6	1
0010 001s	1	7	1
0010 000s	1	8	1
0001 1010 s	1	9	1
0001 1001 s	1	10	1
0001 1000 s	1	11	1
0001 0111 s	1	12	1
0001 0110 s	1	13	1
0001 0101 s	1	14	1
0001 0100 s	1	15	1
0001 0011 s	1	16	1
0000 1100 0s	1	17	1
0000 1011 1s	1	18	1
0000 1011 0s	1	19	1
0000 1010 1s	1	20	1
0000 1010 0s	1	21	1
0000 1001 1s	1	22	1
0000 1001 0s	1	23	1
0000 1000 1s	1	24	1
0000 0001 11s	1	25	1
0000 0001 10s	1	26	1
0000 0001 01s	1	27	1
0000 0001 00s	1	28	1
0000 0100 100s	1	29	1

0000 0101 0100s	0	6	3
0100 10s	0	7	1
0000 0010 10s	0	7	2
0100 01s	0	8	1
0000 0010 01s	0	8	2
0100 00s	0	9	1
0000 0010 00s	0	9	2
0010 110s	0	10	1
0000 0101 0101s	0	10	2
0010 101s	0	11	1
0010 100s	0	12	1
0001 1100 s	0	13	1
0001 1011 s	0	14	1
0001 0000 1s	0	15	1
0001 0000 0s	0	16	1
0000 1111 1s	0	17	1
0000 1111 0s	0	18	1
0000 1110 1s	0	19	1
0000 1110 0s	0	20	1
0000 1101 1s	0	21	1
0000 1101 0s	0	22	1
0000 0100 010s	0	23	1
0000 0100 011s	0	24	1
0000 0101 0110s	0	25	1
0000 0101 0111s	0	26	1

0000 0100 101s	1	30	1
0000 0100 110s	1	31	1
0000 0100 111s	1	32	1
0000 0101 1000s	1	33	1
0000 0101 1001s	1	34	1
0000 0101 1010s	1	35	1
0000 0101 1011s	1	36	1
0000 0101 1100s	1	37	1
0000 0101 1101s	1	38	1
0000 0101 1110s	1	39	1
0000 0101 1111s	1	40	1
0000 0111	escape		

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999

Table B-18 -- FLC table for RUNS and LEVELS

Code	Run
000 000	0
000 001	1
000 010	2
.	.
.	.
111 111	63

Code	Level
forbidden	-2048
1000 0000 0001	-2047
.	.
1111 1111 1110	-2
1111 1111 1111	-1
forbidden	0
0000 0000 0001	1
0000 0000 0010	2
.	.
0111 1111 1111	2047

Table B-19 -- ESCL(a), LMAX values of intra macroblocks

LAST	RUN	LMAX
0	0	27
0	1	10
0	2	5
0	3	4
0	4-7	3
0	8-9	2
0	10-14	1
0	others	N/A

LAST	RUN	LMAX
1	0	8
1	1	3
1	2-6	2
1	7-20	1
1	others	N/A

Table B-20 -- ESCL(b), LMAX values of inter macroblocks

LAST	RUN	LMAX
0	0	12
0	1	6
0	2	4
0	3-6	3
0	7-10	2
0	11-26	1
0	others	N/A

LAST	RUN	LMAX
1	0	3
1	1	2
1	2-40	1
1	others	N/A

Table B-21 -- ESCR(a), RMAX values of intra macroblocks

LAST	LEVEL	RMAX
0	1	14
0	2	9
0	3	7
0	4	3
0	5	2
0	6-10	1
0	11-27	0
0	others	N/A

LAST	LEVEL	RMAX
1	1	20
1	2	6
1	3	1
1	4-8	0
1	others	N/A


Table B-22 -- ESCR(b), RMAX values of inter macroblocks

LAST	LEVEL	RMAX
0	1	26
0	2	10
0	3	6
0	4	2
0	5-6	1
0	7-12	0
0	others	N/A

LAST	LEVEL	RMAX
1	1	40
1	2	1
1	3	0
1	others	N/A

Table B-23 -- RVLC table for TCOEF

ESCAPE code is added at the beginning and the end of these fixed-length codes for realizing two-way decode as shown below. A marker bit is inserted before and after the 11-bit-LEVEL in order to avoid the resync\_marker emulation.

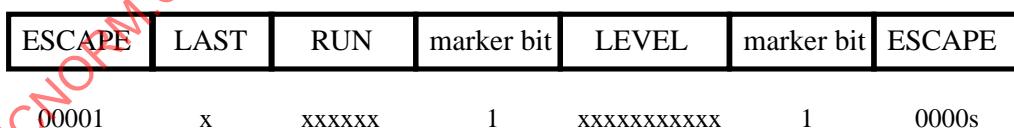

NOTE There are two types for ESCAPE added at the end of these fixed-length codes, and codewords are "0000s". Also, S=0 : LEVEL is positive and S=1 : LEVEL is negative.

INDEX	intra			inter			BITS	VLC_CODE
	LAST	RUN	LEVEL	LAST	RUN	LEVEL		
0	0	0	1	0	0	1	4	110s
1	0	0	2	0	1	1	4	111s
2	0	1	1	0	0	2	5	0001s
3	0	0	3	0	2	1	5	1010s

4	1	0	1	1	0	1	5	1011s
5	0	2	1	0	0	3	6	00100s
6	0	3	1	0	3	1	6	00101s
7	0	1	2	0	4	1	6	01000s
8	0	0	4	0	5	1	6	01001s
9	1	1	1	1	1	1	6	10010s
10	1	2	1	1	2	1	6	10011s
11	0	4	1	0	1	2	7	001100s
12	0	5	1	0	6	1	7	001101s
13	0	0	5	0	7	1	7	010100s
14	0	0	6	0	8	1	7	010101s
15	1	3	1	1	3	1	7	011000s
16	1	4	1	1	4	1	7	011001s
17	1	5	1	1	5	1	7	100010s
18	1	6	1	1	6	1	7	100011s
19	0	6	1	0	0	4	8	0011100s
20	0	7	1	0	2	2	8	0011101s
21	0	2	2	0	9	1	8	0101100s
22	0	1	3	0	10	1	8	0101101s
23	0	0	7	0	11	1	8	0110100s
24	1	7	1	1	7	1	8	0110101s
25	1	8	1	1	8	1	8	0111000s
26	1	9	1	1	9	1	8	0111001s
27	1	10	1	1	10	1	8	1000010s
28	1	11	1	1	11	1	8	1000011s
29	0	8	1	0	0	5	9	00111100s
30	0	9	1	0	0	6	9	00111101s
31	0	3	2	0	1	3	9	01011100s
32	0	4	2	0	3	2	9	01011101s
33	0	1	4	0	4	2	9	01101100s
34	0	1	5	0	12	1	9	01101101s
35	0	0	8	0	13	1	9	01110100s
36	0	0	9	0	14	1	9	01110101s
37	1	0	2	1	0	2	9	01111000s
38	1	12	1	1	12	1	9	01111001s

39	1	13	1	1	13	1	9	10000010s
40	1	14	1	1	14	1	9	10000011s
41	0	10	1	0	0	7	10	001111100s
42	0	5	2	0	1	4	10	001111101s
43	0	2	3	0	2	3	10	010111100s
44	0	3	3	0	5	2	10	010111101s
45	0	1	6	0	15	1	10	011011100s
46	0	0	10	0	16	1	10	011011101s
47	0	0	11	0	17	1	10	011101100s
48	1	1	2	1	1	2	10	011101101s
49	1	15	1	1	15	1	10	011110100s
50	1	16	1	1	16	1	10	011110101s
51	1	17	1	1	17	1	10	011111000s
52	1	18	1	1	18	1	10	011111001s
53	1	19	1	1	19	1	10	100000010s
54	1	20	1	1	20	1	10	100000011s
55	0	11	1	0	0	8	11	0011111100s
56	0	12	1	0	0	9	11	0011111101s
57	0	6	2	0	1	5	11	0101111100s
58	0	7	2	0	3	3	11	0101111101s
59	0	8	2	0	6	2	11	0110111100s
60	0	4	3	0	7	2	11	0110111101s
61	0	2	4	0	8	2	11	0111011100s
62	0	1	7	0	9	2	11	0111011101s
63	0	0	12	0	18	1	11	0111101100s
64	0	0	13	0	19	1	11	0111101101s
65	0	0	14	0	20	1	11	0111110100s
66	1	21	1	1	21	1	11	0111110101s
67	1	22	1	1	22	1	11	0111111000s
68	1	23	1	1	23	1	11	0111111001s
69	1	24	1	1	24	1	11	1000000010s
70	1	25	1	1	25	1	11	1000000011s
71	0	13	1	0	0	10	12	00111111100s
72	0	9	2	0	0	11	12	00111111101s
73	0	5	3	0	1	6	12	01011111100s
74	0	6	3	0	2	4	12	01011111101s

IECNORM.COM: Click to view the full PDF of ISO/IEC 14496-2:1999

75	0	7	3	0	4	3	12	01101111100s
76	0	3	4	0	5	3	12	01101111101s
77	0	2	5	0	10	2	12	01110111100s
78	0	2	6	0	21	1	12	01110111101s
79	0	1	8	0	22	1	12	01111011100s
80	0	1	9	0	23	1	12	01111011101s
81	0	0	15	0	24	1	12	01111101100s
82	0	0	16	0	25	1	12	01111101101s
83	0	0	17	0	26	1	12	01111110100s
84	1	0	3	1	0	3	12	01111110101s
85	1	2	2	1	2	2	12	01111111000s
86	1	26	1	1	26	1	12	01111111001s
87	1	27	1	1	27	1	12	100000000010s
88	1	28	1	1	28	1	12	100000000011s
89	0	10	2	0	0	12	13	001111111100s
90	0	4	4	0	1	7	13	001111111101s
91	0	5	4	0	2	5	13	010111111100s
92	0	6	4	0	3	4	13	010111111101s
93	0	3	5	0	6	3	13	011011111100s
94	0	4	5	0	7	3	13	011011111101s
95	0	1	10	0	11	2	13	011101111100s
96	0	0	18	0	27	1	13	011101111101s
97	0	0	19	0	28	1	13	011110111100s
98	0	0	22	0	29	1	13	011110111101s
99	1	1	3	1	1	3	13	011111011100s
100	1	3	2	1	3	2	13	011111011101s
101	1	4	2	1	4	2	13	011111101100s
102	1	29	1	1	29	1	13	011111101101s
103	1	30	1	1	30	1	13	011111110100s
104	1	31	1	1	31	1	13	011111110101s
105	1	32	1	1	32	1	13	0111111111000s
106	1	33	1	1	33	1	13	0111111111001s
107	1	34	1	1	34	1	13	100000000010s
108	1	35	1	1	35	1	13	100000000011s
109	0	14	1	0	0	13	14	0011111111100s

110	0	15	1	0	0	14	14	001111111101s
111	0	11	2	0	0	15	14	010111111100s
112	0	8	3	0	0	16	14	010111111101s
113	0	9	3	0	1	8	14	011011111100s
114	0	7	4	0	3	5	14	011011111101s
115	0	3	6	0	4	4	14	011101111100s
116	0	2	7	0	5	4	14	011101111101s
117	0	2	8	0	8	3	14	0111101111100s
118	0	2	9	0	12	2	14	0111101111101s
119	0	1	11	0	30	1	14	0111110111100s
120	0	0	20	0	31	1	14	0111110111101s
121	0	0	21	0	32	1	14	0111111011100s
122	0	0	23	0	33	1	14	0111111011101s
123	1	0	4	1	0	4	14	0111111101100s
124	1	5	2	1	5	2	14	0111111101101s
125	1	6	2	1	6	2	14	0111111110100s
126	1	7	2	1	7	2	14	0111111110101s
127	1	8	2	1	8	2	14	0111111111000s
128	1	9	2	1	9	2	14	0111111111001s
129	1	36	1	1	36	1	14	1000000000010s
130	1	37	1	1	37	1	14	1000000000011s
131	0	16	1	0	0	17	15	0011111111100s
132	0	17	1	0	0	18	15	00111111111101s
133	0	18	1	0	1	9	15	01011111111100s
134	0	8	4	0	1	10	15	01011111111101s
135	0	5	5	0	2	6	15	01101111111100s
136	0	4	6	0	2	7	15	011011111111101s
137	0	5	6	0	3	6	15	01110111111100s
138	0	3	7	0	6	4	15	01110111111101s
139	0	3	8	0	9	3	15	01111011111100s
140	0	2	10	0	13	2	15	01111011111101s
141	0	2	11	0	14	2	15	01111101111100s
142	0	1	12	0	15	2	15	01111101111101s
143	0	1	13	0	16	2	15	01111110111100s
144	0	0	24	0	34	1	15	01111110111101s
145	0	0	25	0	35	1	15	01111111011100s

IECNORM.COM: Click to view the full PDF of ISO/IEC 14496-2:1999

146	0	0	26	0	36	1	15	01111111011101s
147	1	0	5	1	0	5	15	01111111101100s
148	1	1	4	1	1	4	15	01111111101101s
149	1	10	2	1	10	2	15	01111111110100s
150	1	11	2	1	11	2	15	011111111110101s
151	1	12	2	1	12	2	15	011111111111000s
152	1	38	1	1	38	1	15	011111111111001s
153	1	39	1	1	39	1	15	100000000000010s
154	1	40	1	1	40	1	15	100000000000011s
155	0	0	27	0	0	19	16	001111111111100s
156	0	3	9	0	3	7	16	001111111111101s
157	0	6	5	0	4	5	16	010111111111100s
158	0	7	5	0	7	4	16	010111111111101s
159	0	9	4	0	17	2	16	010111111111100s
160	0	12	2	0	37	1	16	011011111111101s
161	0	19	1	0	38	1	16	011011111111100s
162	1	1	5	1	1	5	16	011101111111101s
163	1	2	3	1	2	3	16	0111101111111100s
164	1	13	2	1	13	2	16	0111101111111101s
165	1	41	1	1	41	1	16	011111011111100s
166	1	42	1	1	42	1	16	011111011111101s
167	1	43	1	1	43	1	16	011111101111100s
168	1	44	1	1	44	1	16	011111101111101s
169	ESCAPE					5	0000s	

Table B-24 -- FLC table for RUN

RUN	CODE
0	000000
1	000001
2	000010
:	:
63	111111

**Table B-25 -- FLC table for LEVEL**

LEVEL	CODE
0	FORBIDDEN
1	000000000001
2	000000000010
:	:
2047	111111111111

**B.1.5 Shape Coding****Table B-26 -- Meaning of shape mode**

Index	Shape mode
0	= "MVDs==0 && No Update"
1	= "MVDs!=0 && No Update"
2	transparent
3	opaque
4	"intraCAE"
5	"interCAE && MVDs==0"
6	"interCAE && MVDs!=0"

**Table B-27 -- bab\_type for I-VOP**

Index	(2)	(3)	(4)	Index	(2)	(3)	(4)
0	1	001	01	41	001	01	1
1	001	01	1	42	1	01	001
2	01	001	1	43	001	1	01
3	1	001	01	44	001	01	1
4	1	01	001	45	1	01	001
5	1	01	001	46	001	01	1
6	1	001	01	47	01	001	1
7	1	01	001	48	1	01	001
8	01	001	1	49	001	01	1
9	001	01	1	50	01	001	1
10	1	01	001	51	1	001	01
11	1	01	001	52	001	1	01
12	001	01	1	53	01	001	1
13	1	01	001	54	1	001	01

14	01	1	001	55	01	001	1
15	001	01	1	56	01	001	1
16	1	01	001	57	1	01	001
17	1	01	001	58	1	01	001
18	01	001	1	59	1	01	001
19	1	01	001	60	1	01	001
20	001	01	1	61	1	01	001
21	01	001	1	62	01	001	1
22	1	01	001	63	1	01	001
23	001	01	1	64	001	01	1
24	01	001	1	65	001	01	1
25	001	01	1	66	01	001	1
26	001	01	1	67	001	1	01
27	1	01	001	68	001	1	01
28	1	01	001	69	01	001	1
29	1	01	001	70	001	1	01
30	1	01	001	71	001	01	1
31	1	01	001	72	1	001	01
32	1	01	001	73	001	01	1
33	1	01	001	74	01	001	1
34	1	01	001	75	01	001	1
35	001	01	1	76	001	1	01
36	1	01	001	77	001	01	1
37	001	01	1	78	1	001	01
38	001	01	1	79	001	1	01
39	1	01	001	80	001	01	1
40	001	1	01				

IECNORM.COM: Click to view the full PDF of ISO/IEC 14496-2:1999

Table B-28 -- bab\_type for P-VOP and B-VOP

		bab_type in current VOP (n)						
		0	1	2	3	4	5	6
bab_type in previous VOP(n-1)	0	1	01	00001	000001	0001	0010	0011
	1	01	1	00001	000001	001	0000001	0001
	2	0001	001	1	000001	01	0000001	00001
	3	1	0001	000001	001	01	0000001	00001
	4	011	001	0001	00001	1	000001	010
	5	01	0001	00001	000001	001	11	10
	6	001	0001	00001	000001	01	10	11

Table B-29 -- VLC table for MVDs

MVDs	Codes
0	0
$\pm 1$	10s
$\pm 2$	110s
$\pm 3$	1110s
$\pm 4$	11110s
$\pm 5$	111110s
$\pm 6$	1111110s
$\pm 7$	11111110s
$\pm 8$	111111110s
$\pm 9$	1111111110s
$\pm 10$	11111111110s
$\pm 11$	111111111110s
$\pm 12$	1111111111110s
$\pm 13$	11111111111110s
$\pm 14$	111111111111110s
$\pm 15$	1111111111111110s
$\pm 16$	11111111111111110s

Table B-30 -- VLC table for MVDs (Horizontal element is 0)

MVDs	Codes
$\pm 1$	0s
$\pm 2$	10s
$\pm 3$	110s

$\pm 4$	1110s
$\pm 5$	11110s
$\pm 6$	111110s
$\pm 7$	1111110s
$\pm 8$	11111110s
$\pm 9$	111111110s
$\pm 10$	1111111110s
$\pm 11$	11111111110s
$\pm 12$	111111111110s
$\pm 13$	1111111111110s
$\pm 14$	11111111111110s
$\pm 15$	111111111111110s
$\pm 16$	1111111111111110s
s: sign bit (if MVDs is positive s="1", otherwise s="0").	

Table B-31 -- VLC for conv\_ratio

conv_ratio	Code
1	0
2	10
4	11

These tables contain the probabilities for a binary alpha pixel being equal to 0 for intra and inter shape coding using CAE. All probabilities are normalised to the range [1,65535].

As an example, given an INTRA context number C, the probability that the pixel is zero is given by intra\_prob[C].

Table B-32 -- Probabilities for arithmetic decoding of shape

```
USInt intra_prob[1024] = {
  65267, 16468, 65003, 17912, 64573, 8556, 64252, 5653, 40174, 3932, 29789, 277, 45152, 1140, 32768, 2043,
  4499, 80, 6554, 1144, 21065, 465, 32768, 799, 5482, 183, 7282, 264, 5336, 99, 6554, 563,
  54784, 30201, 58254, 9879, 54613, 3069, 32768, 58495, 32768, 32768, 32768, 2849, 58982, 54613, 32768, 12892,
  31006, 1332, 49152, 3287, 60075, 350, 32768, 712, 39322, 760, 32768, 354, 52659, 432, 61854, 150,
  64999, 28362, 65323, 42521, 63572, 32768, 63677, 18319, 4910, 32768, 64238, 434, 53248, 32768, 61865, 13590,
  16384, 32768, 13107, 333, 32768, 32768, 32768, 32768, 32768, 1074, 780, 25058, 5461, 6697, 233,
  62949, 30247, 63702, 24638, 59578, 32768, 32768, 42257, 32768, 32768, 49152, 546, 62557, 32768, 54613, 19258,
  62405, 32569, 64600, 865, 60495, 10923, 32768, 898, 34193, 24576, 64111, 341, 47492, 5231, 55474, 591,
```

65114,60075,64080,5334,65448,61882,64543,13209,54906,16384,35289,4933,48645,9614,55351,7318,  
49807,54613,32768,32768,50972,32768,32768,32768,15159,1928,2048,171,3093,8,6096,74,  
32768,60855,32768,32768,32768,32768,32768,32768,32768,32768,32768,32768,32768,55454,32768,57672,  
32768,16384,32768,21845,32768,32768,32768,32768,32768,32768,32768,5041,28440,91,32768,45,  
65124,10923,64874,5041,65429,57344,63435,48060,61440,32768,63488,24887,59688,3277,63918,14021,  
32768,32768,32768,32768,32768,32768,32768,32768,690,32768,32768,1456,32768,32768,8192,728,  
32768,32768,58982,17944,65237,54613,32768,2242,32768,32768,32768,42130,49152,57344,58254,16740,  
32768,10923,54613,182,32768,32768,32768,7282,49152,32768,32768,5041,63295,1394,55188,77,  
63672,6554,54613,49152,64558,32768,32768,5461,64142,32768,32768,32768,62415,32768,32768,16384,  
1481,438,19661,840,33654,3121,64425,6554,4178,2048,32768,2260,5226,1680,32768,565,  
60075,32768,32768,32768,32768,32768,32768,32768,32768,32768,32768,32768,32768,32768,  
16384,261,32768,412,16384,636,32768,4369,23406,4328,32768,524,15604,560,32768,676,  
49152,32768,49152,32768,32768,64572,32768,32768,32768,54613,32768,32768,32768,32768,  
4681,32768,5617,851,32768,32768,59578,32768,32768,32768,3121,3121,49152,32768,6554,10923,  
32768,32768,54613,14043,32768,32768,32768,3449,32768,32768,32768,32768,32768,32768,32768,  
57344,32768,57344,3449,32768,32768,32768,3855,58982,10923,32768,239,62259,32768,49152,85,  
58778,23831,62888,20922,64311,8192,60075,575,59714,32768,57344,40960,62107,4096,61943,3921,  
39862,15338,32768,1524,45123,5958,32768,58982,6669,930,1170,1043,7385,44,8813,5011,  
59578,29789,54613,32768,32768,32768,32768,32768,32768,32768,32768,32768,58254,56174,32768,32768,  
64080,25891,49152,22528,32768,2731,32768,10923,10923,3283,32768,1748,17827,77,32768,108,  
62805,32768,62013,42612,32768,32768,61681,16384,58982,60075,62313,58982,65279,58982,62694,62174,  
32768,32768,10923,950,32768,32768,32768,5958,32768,38551,1092,11012,39322,13705,2072,  
54613,32768,32768,11398,32768,32768,32768,145,32768,32768,32768,29789,60855,32768,61681,54792,  
32768,32768,32768,17348,32768,32768,8192,57344,16384,32768,3582,52581,580,24030,303,  
62673,37266,65374,6197,62017,32768,49152,299,54613,32768,32768,32768,35234,119,32768,3855,  
31949,32768,32768,49152,16384,32768,32768,32768,24576,32768,49152,32768,17476,32768,32768,57445,  
51200,50864,54613,27949,60075,20480,32768,57344,32768,32768,32768,32768,45875,32768,32768,  
11498,3244,24576,482,16384,1150,32768,16384,7992,215,32768,1150,23593,927,32768,993,  
65353,32768,65465,46741,41870,32768,64596,59578,62087,32768,12619,23406,11833,32768,47720,17476,  
32768,32768,2621,6554,32768,32768,32768,32768,32768,5041,32768,16384,32768,4096,2731,  
63212,43526,65442,47124,65410,35747,60304,55858,60855,58982,60075,19859,35747,63015,64470,25432,  
58689,1118,64717,1339,24576,32768,32768,1257,53297,1928,32768,33,52067,3511,62861,453,  
64613,32768,32768,32768,64558,32768,32768,2731,49152,32768,32768,32768,61534,32768,32768,35747,  
32768,32768,32768,32768,13107,32768,32768,32768,32768,32768,32768,32768,20480,32768,32768,32768,  
32768,32768,32768,54613,40960,5041,32768,32768,32768,32768,32768,3277,64263,57592,32768,3121,  
32768,32768,32768,32768,10923,32768,32768,32768,8192,32768,32768,5461,6899,32768,1725,  
63351,3855,63608,29127,62415,7282,64626,60855,32768,32768,60075,5958,44961,32768,61866,53718,

```
32768,32768,32768,32768,32768,6554,32768,32768,32768,32768,2521,978,32768,1489,  
58254,32768,58982,61745,21845,32768,54613,58655,60075,32768,49152,16274,50412,64344,61643,43987,  
32768,32768,32768,1638,32768,32768,24966,54613,32768,32768,2427,46951,32768,17970,654,  
65385,27307,60075,26472,64479,32768,32768,4681,61895,32768,32768,16384,58254,32768,32768,6554,  
37630,3277,54613,6554,4965,5958,4681,32768,42765,16384,32768,21845,22827,16384,32768,6554,  
65297,64769,60855,12743,63195,16384,32768,37942,32768,32768,32768,60075,32768,62087,54613,  
41764,2161,21845,1836,17284,5424,10923,1680,11019,555,32768,431,39819,907,32768,171,  
65480,32768,64435,33803,2595,32768,57041,32768,61167,32768,32768,32768,32768,32768,1796,  
60855,32768,17246,978,32768,32768,8192,32768,32768,14043,2849,32768,2979,6554,6554,  
65507,62415,65384,61891,65273,58982,65461,55097,32768,32768,32768,55606,32768,2979,3745,16913,  
61885,13827,60893,12196,60855,53248,51493,11243,56656,783,55563,143,63432,7106,52429,445,  
65485,1031,65020,1380,65180,57344,65162,36536,61154,6554,26569,2341,63593,3449,65102,533,  
47827,2913,57344,3449,35688,1337,32768,22938,25012,910,7944,1008,29319,607,64466,4202,  
64549,57301,49152,20025,63351,61167,32768,45542,58982,14564,32768,9362,61895,44840,32768,26385,  
59664,17135,60855,13291,40050,12252,32768,7816,25798,1850,60495,2662,18707,122,52538,231,  
65332,32768,65210,21693,65113,6554,65141,39667,62259,32768,22258,1337,63636,32768,64255,52429,  
60362,32768,6780,819,16384,32768,16384,4681,49152,32768,8985,2521,24410,683,21535,16585,  
65416,46091,65292,58328,64626,32768,65016,39897,62687,47332,62805,28948,64284,53620,52870,49567,  
65032,31174,63022,28312,64299,46811,48009,31453,61207,7077,50299,1514,60047,2634,46488,235  
};
```

```
USInt inter_prob[512] = {  
65532,62970,65148,54613,62470,8192,62577,8937,65480,64335,65195,53248,65322,62518,62891,38312,  
65075,53405,63980,58982,32768,32768,54613,32768,65238,60009,60075,32768,59294,19661,61203,13107,  
63000,9830,62566,58982,11565,32768,25215,3277,53620,50972,63109,43691,54613,32768,39671,17129,  
59788,6068,43336,27913,6554,32768,12178,1771,56174,49152,60075,43691,58254,16384,49152,9930,  
23130,7282,40960,32768,10923,32768,32768,32768,27307,32768,32768,32768,32768,32768,32768,  
36285,12511,10923,32768,45875,16384,32768,32768,16384,23831,4369,32768,8192,10923,32768,32768,  
10175,2979,18978,10923,54613,32768,6242,6554,1820,10923,32768,32768,32768,32768,5461,  
28459,593,11886,2030,3121,4681,1292,112,42130,23831,49152,29127,32768,6554,5461,2048,  
65331,64600,63811,63314,42130,19661,49152,32768,65417,64609,62415,64617,64276,44256,61068,36713,  
64887,57525,53620,61375,32768,8192,57344,6554,63608,49809,49152,62623,32768,15851,58982,34162,  
55454,51739,64406,64047,32768,32768,7282,32768,49152,58756,62805,64990,32768,14895,16384,19418,  
57929,24966,58689,31832,32768,16384,10923,6554,54613,42882,57344,64238,58982,10082,20165,20339,  
62687,15061,32768,10923,32768,10923,32768,16384,59578,34427,32768,16384,32768,7825,32768,7282,  
58052,23400,32768,5041,32768,2849,32768,32768,47663,15073,57344,4096,32768,1176,32768,1320,  
24858,410,24576,923,32768,16384,16384,5461,16384,1365,32768,5461,32768,5699,8192,13107,
```

46884,2361,23559,424,19661,712,655,182,58637,2094,49152,9362,8192,85,32768,1228,  
 65486,49152,65186,49152,61320,32768,57088,25206,65352,63047,62623,49152,64641,62165,58986,18304,  
 64171,16384,60855,54613,42130,32768,61335,32768,58254,58982,49152,32768,60985,35289,64520,31554,  
 51067,32768,64074,32768,40330,32768,34526,4096,60855,32768,63109,58254,57672,16384,31009,2567,  
 23406,32768,44620,10923,32768,32099,10923,49152,49152,54613,60075,63422,54613,46388,39719,  
 58982,32768,54613,32768,14247,32768,22938,5041,32768,49152,32768,32768,25321,6144,29127,10999,  
 41263,32768,46811,32768,267,4096,426,16384,32768,19275,49152,32768,1008,1437,5767,11275,  
 5595,5461,37493,6554,4681,32768,6147,1560,38229,10923,32768,40960,35747,2521,5999,312,  
 17052,2521,18808,3641,213,2427,574,32,51493,42130,42130,53053,11155,312,2069,106,  
 64406,45197,58982,32768,32768,16384,40960,36864,65336,64244,60075,61681,65269,50748,60340,20515,  
 58982,23406,57344,32768,6554,16384,19661,61564,60855,47480,32768,54613,46811,21701,54909,37826,  
 32768,58982,60855,60855,32768,32768,39322,49152,57344,45875,60855,55706,32768,24576,62313,25038,  
 54613,8192,49152,10923,32768,32768,32768,32768,19661,16384,51493,32768,14043,40050,44651,  
 59578,5174,32768,6554,32768,5461,23593,5461,63608,51825,32768,23831,58887,24032,57170,3298,  
 39322,12971,16384,49152,1872,618,13107,2114,58982,25705,32768,60075,28913,949,18312,1815,  
 48188,114,51493,1542,5461,3855,11360,1163,58982,7215,54613,21487,49152,4590,48430,1421,  
 28944,1319,6868,324,1456,232,820,7,61681,1864,60855,9922,4369,315,6589,14  
 };

### B.1.6 Sprite Coding

Table B-33 -- Code table for the first trajectory point

dmv value	SSS	VLC	dmv_code
-16383 ... -8192, 8192 ... 16383	14	111111111110	00000000000000...01111111111111, 10000000000000...11111111111111
-8191 ... -4096, 4096 ... 8191	13	11111111110	00000000000000...01111111111111, 10000000000000...11111111111111
-4095 ... -2048, 2048 ... 4095	12	1111111110	000000000000...01111111111111, 100000000000...11111111111111
-2047...-1024, 1024...2047	11	111111110	000000000000...01111111111111, 100000000000...11111111111111
-1023...-512, 512...1023	10	11111110	0000000000...0111111111, 1000000000...1111111111
-511...-256, 256...511	9	1111110	000000000...0111111111, 100000000...1111111111
-255...-128, 128...255	8	111110	00000000...011111111, 10000000...11111111
-127...-64, 64...127	7	11110	0000000...011111111, 1000000...11111111
-63...-32, 32...63	6	1110	000000...011111111, 100000...11111111
-31...-16, 16...31	5	110	00000...011111111, 10000...11111111
-15...-8, 8...15	4	101	0000...011111111, 1000...11111111

-7...-4, 4...7	3	100	000...011, 100...111
-3...-2, 2...3	2	011	00...01, 10...11
-1, 1	1	010	0, 1
0	0	00	-

Table B-34 -- Code table for scaled brightness change factor

brightness_change_factor value	brightness_change_factor_length value	brightness_change_factor_length VLC	brightness_change_factor
-16...-1, 1...16	1	0	00000...01111, 10000...11111
-48...-17, 17...48	2	10	000000...011111, 100000...111111
112...-49, 49...112	3	110	0000000...0111111, 1000000...1111111
113...624	4	1110	000000000...111111111
625...1648	4	1111	000000000...1111111111

### B.1.7 DCT based facial object decoding

Table B-35 -- Viseme\_select\_table, 29 symbols

symbol	bits	code	symbol	bits	code	symbol	bits	code
0	6	001000	10	6	010001	20	6	010000
1	6	001001	11	6	011001	21	6	010010
2	6	001011	12	5	00001	22	6	011010
3	6	001101	13	6	011101	23	5	00010
4	6	001111	14	1	1	24	6	011110
5	6	010111	15	6	010101	25	6	010110
6	6	011111	16	6	010100	26	6	001110
7	5	00011	17	6	011100	27	6	001100
8	6	011011	18	5	00000	28	6	001010
9	6	010011	19	6	011000			

Table B-36 --Expression\_select\_table, 13 symbols

symbol	bits	code	symbol	bits	code	symbol	bits	code
0	5	01000	5	4	0011	10	5	01110
1	5	01001	6	1	1	11	5	01100
2	5	01011	7	4	0001	12	5	01010
3	5	01101	8	4	0000			
4	5	01111	9	4	0010			

Table B-37 -- Viseme and Expression intensity table, 127 symbols

symbol	bits	code	symbol	bits	code	symbol	bits	code
0	17	10010001101010010	43	16	1001000110100111	86	16	1001000110100110
1	17	10010001101010011	44	8	10011100	87	16	1001000110100100
2	17	10010001101010101	45	11	10010001111	88	16	1001000110100010
3	17	10010001101010111	46	9	100100010	89	16	1001000110100000
4	17	10010001101011001	47	10	1110001011	90	16	1001000110011110
5	17	10010001101011011	48	9	100011011	91	16	1001000110011100
6	17	10010001101011101	49	10	1110001001	92	16	1001000110011010
7	17	10010001101011111	50	9	100011010	93	16	1001000110011000
8	17	10010001101100001	51	9	100111010	94	16	1001000110010110
9	17	10010001101100011	52	10	1110001000	95	16	1001000110010100
10	17	10010001101100101	53	7	1000111	96	16	1001000110010010
11	17	10010001101100111	54	7	1000010	97	16	1001000110010000
12	17	10010001101101001	55	8	10010000	98	16	1001000110001110
13	17	10010001101101011	56	7	1001111	99	16	1001000110001100
14	17	10010001101101101	57	7	1110000	100	16	1001000110001010
15	17	10010001101101111	58	6	1000000	101	16	1001000110001000
16	17	10010001101110001	59	6	100101	102	16	1001000110000110
17	17	10010001101110011	60	6	111010	103	16	1001000110000100
18	17	10010001101110111	61	5	11111	104	16	1001000110000010
19	17	10010001101111001	62	3	101	105	16	1001000110000000
20	17	10010001101111011	63	1	0	106	17	10010001101111110
21	17	10010001101111101	64	3	110	107	17	10010001101111100
22	17	10010001101111111	65	5	11110	108	17	10010001101111010
23	16	1001000110000001	66	6	111001	109	17	10010001101111000
24	16	1001000110000011	67	6	111011	110	17	10010001101111010
25	16	1001000110000101	68	6	100010	111	17	100100011011110010
26	16	1001000110000111	69	7	1001100	112	17	100100011011110000
27	16	1001000110001001	70	7	1001001	113	17	10010001101101110
28	16	1001000110001011	71	7	1001101	114	17	10010001101101100
29	16	1001000110001101	72	8	10001100	115	17	10010001101101010
30	16	1001000110001111	73	8	10000111	116	17	10010001101101000
31	16	1001000110010001	74	8	10000110	117	17	10010001101100110
32	16	1001000110010011	75	17	10010001101110100	118	17	10010001101100100
33	16	1001000110010101	76	9	111000110	119	17	10010001101100010

34	16	1001000110010111	77	11	11100010100	120	17	10010001101100000
35	16	1001000110011001	78	11	10011101111	121	17	10010001101011110
36	16	1001000110011011	79	17	10010001101110101	122	17	10010001101011100
37	16	1001000110011101	80	10	1001110110	123	17	10010001101011010
38	16	1001000110011111	81	16	1001000110101000	124	17	10010001101011000
39	16	1001000110100001	82	11	10010001110	125	17	10010001101010110
40	16	1001000110100011	83	10	1110001111	126	17	10010001101010100
41	11	11100010101	84	11	10011101110			
42	16	1001000110100101	85	10	1110001110			

Table B-38 -- Runlength\_table, 16 symbols

symbol	bits	code	symbol	bits	code	symbol	bits	code
0	1	1	6	9	000001011	12	8	000000000
1	2	01	7	9	000001101	13	8	000000010
2	3	001	8	9	000001111	14	9	000001110
3	4	0001	9	8	000000111	15	9	000001100
4	5	00001	10	8	000000001			
5	9	000001010	11	8	000001000			

Table B-39 -- DC\_table, 512 symbols

symbol	bits	code	symbol	bits	code	symbol	bits	code
0	17	11010111001101010	171	17	11010111001111001	342	17	11010111001111000
1	17	11010111001101011	172	17	11010111010000001	343	17	11010111001110000
2	17	11010111001101101	173	17	11010111010001001	344	17	11010111001110010
3	17	11010111001101111	174	17	11010111010010001	345	17	11010111001110101
4	17	11010111001110101	175	17	11010111010011001	346	17	11010111010000010
5	17	11010111001110111	176	17	11010111010101001	347	17	11010111010001010
6	17	11010111001111101	177	17	11010111010110001	348	17	11010111010010010
7	17	11010111001111111	178	17	11010111010111001	349	17	11010111010011010
8	17	11010111010000101	179	17	11010111011000001	350	17	11010111010101010
9	17	11010111010000111	180	17	11010111011001001	351	17	11010111010110010
10	17	11010111010001101	181	17	11010111011011001	352	17	11010111010111010
11	17	11010111010001111	182	17	11010111011111001	353	17	11010111011000010
12	17	11010111010010101	183	17	11010111010000001	354	17	11010111011001010
13	17	11010111010010111	184	17	11010111010001001	355	17	11010111011011010

14	17	11010111010011101	185	17	11010111100011001	356	17	1101011101111010
15	17	11010111010011111	186	17	11010111100100001	357	17	11010111100000010
16	17	11010111010101101	187	17	11010111100101001	358	17	11010111100001010
17	17	11010111010101111	188	17	11010111100111001	359	17	11010111100011010
18	17	11010111010110111	189	17	11010111101000001	360	17	11010111100100010
19	17	11010111010111101	190	17	11010111101001001	361	17	11010111100101010
20	17	11010111010111111	191	17	11010111101011001	362	17	11010111100111010
21	17	11010111011000111	192	17	11010111101111001	363	17	11010111101000010
22	17	11010111011001101	193	17	11010111110000001	364	17	11010111101001010
23	17	11010111011001111	194	17	11010111110001001	365	17	11010111101011010
24	17	11010111011011101	195	17	11010111110011001	366	17	11010111101111010
25	17	11010111011011111	196	17	11010111110111001	367	17	11010111110000010
26	17	11010111011111101	197	17	11010111111100001	368	17	11010111110001010
27	17	11010111011111111	198	17	11010111111101001	369	17	11010111110011010
28	17	1101011100000111	199	17	11010111111111001	370	17	11010111110111010
29	17	1101011100001101	200	16	1101011100000001	371	17	11010111111100010
30	17	1101011100001111	201	16	1101011100001001	372	17	11010111111101010
31	17	1101011100011101	202	16	1101011100011001	373	17	11010111111111010
32	17	1101011100011111	203	17	11010111111001001	374	16	1101011100000010
33	17	1101011100100101	204	17	11010111111010001	375	16	1101011100001010
34	17	1101011100100111	205	17	11010111111011001	376	16	1101011100011010
35	17	1101011100101101	206	16	1101011100101001	377	17	11010111111001010
36	17	1101011100101111	207	17	11010111110100001	378	17	11010111111010010
37	17	1101011100111101	208	17	11010111110101001	379	17	11010111111011010
38	17	1101011100111111	209	17	11010111101101001	380	16	1101011100101010
39	17	1101011101000101	210	17	11010111011100001	381	17	11010111110100010
40	17	1101011101000111	211	16	1101011100100000	382	17	11010111110101010
41	17	1101011101001101	212	16	1101011100100001	383	17	11010111101101010
42	17	1101011101001111	213	17	11010111111000001	384	17	11010111011100010
43	17	1101011101011101	214	16	1101011100010001	385	17	11010111011101010
44	17	1101011101011111	215	17	11010111111110001	386	17	11010111011101000
45	17	1101011101111101	216	17	11010111110110001	387	16	1101011100100010
46	17	1101011101111111	217	17	11010111110010001	388	17	11010111111000010
47	17	11010111110000101	218	11	11101100101	389	16	1101011100010010
48	17	11010111110000111	219	11	11011111011	390	17	11010111111110010
49	17	11010111110001101	220	11	11011110001	391	17	11010111110110010

50	17	11010111110001111	221	10	1101110011	392	17	11010111110010010
51	17	11010111110011101	222	17	11010111101110001	393	17	11010111101110010
52	17	11010111110011111	223	17	11010111010100000	394	17	11010111101010010
53	17	11010111110111101	224	17	11010111010100001	395	17	11010111101010000
54	17	11010111110111111	225	17	11010111011110100	396	17	11010111100010010
55	17	1101011111100101	226	17	11010111011110101	397	17	11010111100010000
56	17	1101011111100111	227	17	11010111011110001	398	17	11010111011010010
57	17	1101011111101101	228	17	1101011100010101	399	17	11010111011010000
58	17	11010111111011111	229	17	1101011100110000	400	16	1101011100110010
59	17	11010111111111101	230	17	1101011100110001	401	16	11010111001100000
60	17	11010111111111111	231	17	1101011101010101	402	17	11010111010100110
61	16	1101011100000101	232	11	11101100111	403	17	11010111010100100
62	16	1101011100000111	233	17	1101011101110101	404	17	11010111010100010
63	16	1101011100001101	234	11	11101100110	405	17	11010111011010110
64	16	1101011100001111	235	17	1101011110110101	406	17	11010111011010100
65	16	1101011100011101	236	17	1101011111000100	407	17	11010111011110110
66	16	1101011100011111	237	8	11010110	408	17	11010111011110010
67	17	11010111111001101	238	11	11011110010	409	17	11010111100010110
68	17	11010111111001111	239	9	110010100	410	17	11010111100110110
69	17	11010111111010101	240	10	1101110001	411	17	11010111100110100
70	17	11010111111010111	241	9	110001111	412	17	11010111100110010
71	17	11010111111011101	242	10	1101111100	413	17	11010111101010110
72	17	11010111111011111	243	9	110010101	414	17	11010111101110110
73	16	1101011100101101	244	9	110111111	415	17	11010111110010110
74	16	1101011100101111	245	10	1101110100	416	17	11010111110010100
75	17	110101111110100101	246	7	1100100	417	17	11010111110110110
76	17	110101111110100111	247	8	11101101	418	17	11010111111110110
77	17	110101111110101101	248	8	11001011	419	17	11010111111110100
78	17	110101111110101111	249	7	1101100	420	16	1101011100010110
79	17	110101111101101101	250	7	1101101	421	16	1101011100010100
80	17	110101111101101111	251	7	1110111	422	17	11010111111000110
81	17	11010111011100101	252	6	110100	423	16	1101011100100110
82	17	11010111011100111	253	6	111001	424	16	1101011100100100
83	17	11010111011101101	254	5	11111	425	17	11010111101100110
84	17	11010111011101111	255	3	100	426	17	11010111101100100

85	17	11010111101100001	256	1	0		427	17	11010111101100010
86	17	11010111101100011	257	3	101		428	17	11010111101100000
87	17	11010111101100101	258	5	11110		429	17	11010111011101110
88	17	11010111101100111	259	6	111000		430	17	11010111011101100
89	16	1101011100100101	260	6	111010		431	17	11010111011100110
90	16	1101011100100111	261	6	110000		432	17	11010111011100100
91	17	1101011111000111	262	7	1100111		433	17	11010111101101110
92	16	1101011100010101	263	7	1100110		434	17	11010111101101100
93	16	1101011100010111	264	7	1101010		435	17	1101011110101110
94	17	11010111111110101	265	8	11000101		436	17	11010111110101100
95	17	11010111111110111	266	8	11000110		437	17	11010111110100110
96	17	11010111110110111	267	8	11000100		438	17	11010111110100100
97	17	11010111110010101	268	17	1101011111000101		439	16	1101011100101110
98	17	11010111110010111	269	9	111011000		440	16	1101011100101100
99	17	11010111101110111	270	11	11011111010		441	17	1101011111011110
100	17	11010111101010111	271	11	11011110101		442	17	11010111111011100
101	17	11010111100110011	272	17	11010111100000101		443	17	11010111111010110
102	17	11010111100110101	273	10	11011110111		444	17	11010111111010100
103	17	11010111100110111	274	17	11010111011000101		445	17	11010111111001110
104	17	11010111100010111	275	11	11011110011		446	17	11010111111001100
105	17	11010111011110011	276	9	110001110		447	16	1101011100011110
106	17	11010111011110111	277	11	11011110000		448	16	1101011100011100
107	17	11010111011010101	278	10	11011101111		449	16	1101011100001110
108	17	11010111011010111	279	17	11010111010110101		450	16	1101011100001100
109	17	11010111010100011	280	16	1101011100110100		451	16	1101011100000110
110	17	11010111010100101	281	10	1101110010		452	16	1101011100000100
111	17	11010111010100111	282	10	1101110000		453	17	11010111111111110
112	16	1101011100110001	283	11	11011101010		454	17	110101111111111100
113	16	1101011100110011	284	17	11010111010110100		455	17	11010111111101110
114	17	11010111011010001	285	17	11010111011000100		456	17	11010111111101100
115	17	11010111011010011	286	17	11010111100000100		457	17	11010111111100110
116	17	11010111100010001	287	11	11011101100		458	17	11010111111100100
117	17	11010111100010011	288	17	11010111110110100		459	17	11010111110111110
118	17	11010111101010001	289	17	11010111101110100		460	17	110101111101111100
119	17	11010111101010011	290	17	11010111101010100		461	17	11010111110011110
120	17	11010111101110011	291	11	11101100100		462	17	11010111110011100

121	17	11010111110010011	292	17	11010111100010100	463	17	1101011110001110
122	17	11010111110110011	293	17	11010111011110000	464	17	11010111110001100
123	17	11010111111110011	294	11	1101110100	465	17	11010111110000110
124	16	1101011100010011	295	11	11011101011	466	17	11010111110000100
125	17	11010111111000011	296	17	11010111101110000	467	17	11010111101111110
126	16	1101011100100011	297	17	11010111110010000	468	17	11010111101111100
127	17	11010111011101001	298	17	11010111110110000	469	17	11010111101011110
128	17	11010111011101011	299	17	11010111111110000	470	17	11010111101011100
129	17	11010111011100011	300	16	1101011100010000	471	17	11010111101001110
130	17	11010111101101011	301	17	11010111111000000	472	17	11010111101001100
131	17	11010111110101011	302	11	11011101101	473	17	11010111101000110
132	17	11010111110100011	303	17	11010111011100000	474	17	11010111101000100
133	16	1101011100101011	304	17	11010111101101000	475	17	11010111100111110
134	17	11010111111011011	305	17	11010111110101000	476	17	11010111100111100
135	17	11010111111010011	306	17	11010111110100000	477	17	11010111100101110
136	17	11010111111001011	307	16	1101011100101000	478	17	11010111100101100
137	16	1101011100011011	308	17	11010111111011000	479	17	11010111100100110
138	16	1101011100001011	309	17	11010111111010000	480	17	11010111100100100
139	16	1101011100000011	310	17	11010111111001000	481	17	11010111100011110
140	17	1101011111111011	311	16	1101011100011000	482	17	11010111100011100
141	17	11010111111101011	312	16	1101011100001000	483	17	11010111100001110
142	17	11010111111100011	313	16	11010111000000000	484	17	11010111100001100
143	17	11010111110111011	314	17	1101011111111000	485	17	11010111100000110
144	17	11010111110011011	315	17	11010111111101000	486	17	11010111011111110
145	17	11010111110001011	316	17	11010111111100000	487	17	11010111011111100
146	17	11010111110000011	317	17	11010111110111000	488	17	11010111011011110
147	17	11010111101111011	318	17	11010111110011000	489	17	11010111011011100
148	17	11010111101011011	319	17	11010111110001000	490	17	11010111011001110
149	17	11010111101001011	320	17	11010111110000000	491	17	11010111011001100
150	17	11010111101000011	321	17	11010111101111000	492	17	11010111011000110
151	17	11010111100111011	322	17	11010111101011000	493	17	11010111010111110
152	17	11010111100101011	323	17	11010111101001000	494	17	11010111010111100
153	17	11010111100100011	324	17	11010111101000000	495	17	11010111010110110
154	17	11010111100011011	325	17	11010111100111000	496	17	11010111010101110
155	17	11010111100001011	326	17	11010111100101000	497	17	11010111010101100

156	17	11010111100000011	327	17	11010111100100000	498	17	11010111010011110
157	17	1101011101111011	328	17	11010111100011000	499	17	11010111010011100
158	17	11010111011011011	329	17	11010111100001000	500	17	11010111010010110
159	17	11010111011001011	330	17	11010111100000000	501	17	11010111010010100
160	17	11010111011000011	331	17	11010111011111000	502	17	11010111010001110
161	17	11010111010111011	332	17	11010111011011000	503	17	11010111010001100
162	17	11010111010110011	333	17	11010111011001000	504	17	11010111010000110
163	17	11010111010101011	334	17	11010111011000000	505	17	11010111010000100
164	17	11010111010011011	335	17	11010111010111000	506	17	11010111001111110
165	17	11010111010010011	336	17	11010111010110000	507	17	11010111001111100
166	17	11010111010001011	337	17	11010111010101000	508	17	11010111001110110
167	17	11010111010000011	338	17	11010111010011000	509	17	11010111001110100
168	17	11010111001111011	339	17	11010111010010000	510	17	11010111001101110
169	17	11010111001110011	340	17	11010111010001000	511	17	11010111001101100
170	17	11010111001110001	341	17	11010111010000000			

Table B-40 -- AC\_table, 512 symbols

symbol	no_of_bits	code	symbol	no_of_bits	code	symbol	no_of_bits	code
0	16	1000011100011000	171	16	1000011101100001	342	16	1000011101100000
1	16	1000011100011001	172	16	1000011101000001	343	15	1000011100000000
2	16	1000011100011011	173	16	1000011111000001	344	16	1000011101101000
3	16	1000011100011101	174	16	1000011111100001	345	16	1000011110101000
4	16	1000011100011111	175	15	1000010001000001	346	16	1000011111001000
5	16	1000011100100101	176	15	1000010011000001	347	16	1000011111101000
6	16	1000011100100111	177	15	1000010110000001	348	15	100001000101000
7	16	1000011100101101	178	15	1000010111000001	349	15	100001001101000
8	16	1000011100101111	179	15	1000010101000001	350	15	100001011001000
9	16	1000011100111101	180	15	1000010100000001	351	15	100001011101000
10	16	1000011100111111	181	15	1000010010000001	352	15	100001010101000
11	16	1000011101111101	182	15	1000010000000001	353	15	100001010001000
12	16	1000011101111111	183	16	1000011110000001	354	15	100001001001000
13	16	1000011101111111	184	16	1000011101000001	355	15	100001000001000
14	16	1000011111011101	185	16	1000011101010001	356	16	1000011110001000
15	16	1000011111011111	186	16	1000011110010001	357	16	1000011101001000

16	16	100001111111101	187	15	100001000010001	358	16	1000011101011000
17	16	100001111111111	188	15	100001001010001	359	16	100001110011000
18	15	100001000111101	189	15	100001010010001	360	15	100001000011000
19	15	100001000111111	190	15	100001010110001	361	15	100001001011000
20	15	100001001111101	191	15	100001011110001	362	15	100001010011000
21	15	100001001111111	192	15	100001011010001	363	15	100001010111000
22	15	100001011011101	193	15	100001001110001	364	15	100001011111000
23	15	100001011011111	194	15	100001000110001	365	15	100001011011000
24	15	100001011111101	195	16	1000011111110001	366	15	100001001111000
25	15	100001011111111	196	16	1000011111010001	367	15	100001000111000
26	15	100001010111111	197	16	1000011110110001	368	16	1000011111111000
27	15	100001010011101	198	16	1000011101110001	369	16	1000011111011000
28	15	100001010011111	199	16	1000011100110001	370	16	1000011110111000
29	15	100001001011111	200	15	100001110001001	371	16	1000011101111000
30	15	100001000011111	201	16	1000011100110101	372	16	1000011100111000
31	16	1000011110011111	202	16	1000011101110101	373	16	1000011100101000
32	16	1000011101011111	203	16	1000011110110101	374	16	1000011100100000
33	16	1000011101001111	204	16	1000011111010101	375	16	1000011100100010
34	16	1000011110001111	205	16	1000011111110101	376	16	1000011100101010
35	15	100001000001111	206	15	100001000110101	377	16	1000011100111010
36	15	100001001001111	207	15	100001001110101	378	16	1000011101111010
37	15	100001010001111	208	15	100001011010101	379	16	1000011110111010
38	15	100001010101111	209	15	100001011110101	380	16	1000011111011010
39	15	100001011101111	210	15	100001010110101	381	16	1000011111111010
40	15	100001011001111	211	15	100001010010101	382	15	100001000111010
41	15	100001001101111	212	15	100001001010101	383	15	100001001111010
42	15	100001000101111	213	15	100001000010101	384	15	100001011011010
43	16	1000011111101111	214	16	1000011110010101	385	15	100001011111010
44	16	1000011111001111	215	16	1000011101010101	386	15	1000010101111010
45	16	1000011110101111	216	16	1000011101000101	387	15	100001010011010
46	16	1000011101101111	217	16	1000011110000101	388	15	100001001011010
47	15	100001110000111	218	15	100001000000101	389	15	100001000011010
48	16	1000011101100111	219	15	100001001000101	390	16	1000011110011010
49	16	1000011110100111	220	15	100001010000101	391	16	1000011101011010
50	16	1000011111000111	221	15	100001010100101	392	16	1000011101001010

51	16	100001111100111	222	15	100001011100101	393	16	1000011110001010
52	15	100001000100111	223	15	100001011000101	394	15	100001000001010
53	15	100001001100111	224	15	100001001100101	395	15	100001001001010
54	15	100001011000111	225	15	100001000100101	396	15	100001010001010
55	15	100001011100111	226	16	100001111100101	397	15	100001010101010
56	15	100001010100111	227	16	1000011111000101	398	15	100001011101010
57	15	100001010000111	228	16	1000011110100101	399	15	100001011001010
58	15	100001001000111	229	16	1000011101100101	400	15	100001001101010
59	15	100001000000111	230	15	100001110000101	401	15	100001000101010
60	16	1000011110000111	231	16	1000011101101101	402	16	100001111101010
61	16	1000011101000111	232	16	1000011110101101	403	16	1000011111001010
62	16	1000011101010111	233	16	1000011111001101	404	16	1000011110101010
63	16	1000011110010111	234	16	1000011111101101	405	16	1000011101101010
64	15	100001000010111	235	15	100001000101101	406	15	100001110000010
65	15	100001001010111	236	15	100001001101101	407	16	1000011101100010
66	15	100001010010111	237	15	100001011001101	408	16	1000011110100010
67	15	100001010110111	238	15	100001011101101	409	16	1000011111000010
68	15	100001011110111	239	15	100001010101101	410	16	1000011111100010
69	15	100001011010111	240	15	100001010001101	411	15	100001000100010
70	15	100001001110111	241	15	100001001001101	412	15	100001001100010
71	15	100001000110111	242	15	100001000001101	413	15	100001011000010
72	16	100001111110111	243	16	1000011110001101	414	15	100001011100010
73	16	1000011111010111	244	16	1000011101001101	415	15	100001010100010
74	16	1000011110110111	245	16	1000011101011101	416	15	100001010000010
75	16	1000011101110111	246	16	1000011110011101	417	15	100001001000010
76	16	1000011100110111	247	15	100001000011101	418	15	100001000000010
77	15	100001110001011	248	6	100000	419	16	1000011110000010
78	16	1000011100110011	249	15	100001001011101	420	16	1000011101000010
79	16	1000011101110011	250	15	100001010111101	421	16	1000011101010010
80	16	1000011110110011	251	7	1001110	422	16	1000011110010010
81	16	1000011111010011	252	6	100110	423	15	100001000010010
82	16	100001111110011	253	5	10010	424	15	100001001010010
83	15	100001000110011	254	4	1010	425	15	100001010010010
84	15	100001001110011	255	2	11	426	15	100001010110010
85	15	100001011010011	256	16	1000011110111100	427	15	100001011110010
86	15	100001011110011	257	1	0	428	15	100001011010010

87	15	100001010110011	258	4	1011	429	15	100001001110010
88	15	100001010010011	259	6	100011	430	15	100001000110010
89	15	100001001010011	260	6	100010	431	16	100001111110010
90	15	100001000010011	261	7	1001111	432	16	1000011111010010
91	16	1000011110010011	262	16	1000011110111101	433	16	1000011110110010
92	16	1000011101010011	263	8	10000110	434	16	1000011101110010
93	16	1000011101000011	264	15	100001010111100	435	16	1000011100110010
94	16	1000011110000011	265	15	100001001011100	436	15	100001110001010
95	15	100001000000011	266	15	100001000011100	437	16	1000011100110110
96	15	100001001000011	267	16	1000011110011100	438	16	1000011101110110
97	15	100001010000011	268	16	1000011101011100	439	16	1000011110110110
98	15	100001010100011	269	16	1000011101001100	440	16	1000011111010110
99	15	100001011100011	270	16	1000011110001100	441	16	100001111110110
100	15	100001011000011	271	15	100001000001100	442	15	100001000110110
101	15	100001001100011	272	15	100001001001100	443	15	100001001110110
102	15	100001000100011	273	15	100001010001100	444	15	100001011010110
103	16	100001111100011	274	15	100001010101100	445	15	100001011110110
104	16	1000011111000011	275	15	100001011101100	446	15	100001010110110
105	16	1000011110100011	276	15	100001011001100	447	15	100001010010110
106	16	1000011101100011	277	15	100001001101100	448	15	100001001010110
107	15	100001110000011	278	15	100001000101100	449	15	100001000010110
108	16	1000011101101011	279	16	100001111101100	450	16	100001110010110
109	16	1000011110101011	280	16	1000011111001100	451	16	1000011101010110
110	16	1000011111001011	281	16	1000011110101100	452	16	1000011101000110
111	16	1000011111101011	282	16	1000011101101100	453	16	1000011110000110
112	15	100001000101011	283	15	100001110000100	454	15	100001000000110
113	15	100001001101011	284	16	1000011101100100	455	15	100001001000110
114	15	100001011001011	285	16	1000011110100100	456	15	100001010000110
115	15	100001011101011	286	16	1000011111000100	457	15	100001010100110
116	15	100001010101011	287	16	1000011111100100	458	15	100001011100110
117	15	100001010001011	288	15	100001000100100	459	15	100001011000110
118	15	100001001001011	289	15	100001001100100	460	15	100001001100110
119	15	100001000001011	290	15	100001011000100	461	15	100001000100110
120	16	1000011110001011	291	15	100001011100100	462	16	100001111100110
121	16	1000011101001011	292	15	100001010100100	463	16	1000011111000110

122	16	1000011101011011	293	15	100001010000100	464	16	100001110100110
123	16	1000011110011011	294	15	100001001000100	465	16	1000011101100110
124	15	100001000011011	295	15	100001000000100	466	15	100001110000110
125	15	100001001011011	296	16	1000011110000100	467	16	1000011101101110
126	15	100001010011011	297	16	1000011101000100	468	16	1000011110101110
127	15	100001010111011	298	16	1000011101010100	469	16	1000011111001110
128	15	100001011111011	299	16	1000011110010100	470	16	1000011111101110
129	15	100001011011011	300	15	100001000010100	471	15	100001000101110
130	15	100001001111011	301	15	100001001010100	472	15	100001001101110
131	15	100001000111011	302	15	100001010010100	473	15	100001011001110
132	16	100001111111011	303	15	100001010110100	474	15	100001011101110
133	16	1000011111011011	304	15	100001011110100	475	15	100001010101110
134	16	1000011110111011	305	15	100001011010100	476	15	100001010001110
135	16	1000011101111011	306	15	100001001110100	477	15	100001001001110
136	16	1000011100111011	307	15	100001000110100	478	15	100001000001110
137	16	1000011100101011	308	16	1000011111110100	479	16	1000011110001110
138	16	1000011100100011	309	16	1000011111010100	480	16	1000011101001110
139	16	1000011100100001	310	16	10000111110110100	481	16	1000011101011110
140	16	1000011100101001	311	16	1000011101110100	482	16	1000011110011110
141	16	1000011100111001	312	16	1000011100110100	483	15	10000100001110
142	16	1000011101111001	313	15	100001110001000	484	15	100001001011110
143	16	1000011110111001	314	16	1000011100110000	485	15	100001010011110
144	16	1000011111011001	315	16	1000011101110000	486	15	100001010011100
145	16	1000011111111001	316	16	1000011110110000	487	15	100001010111110
146	15	1000010001111001	317	16	1000011111010000	488	15	100001011111110
147	15	1000010011111001	318	16	1000011111110000	489	15	1000010111111100
148	15	1000010110111001	319	15	100001000110000	490	15	100001011011110
149	15	1000010111111001	320	15	100001001110000	491	15	100001011011100
150	15	1000010101111001	321	15	100001011010000	492	15	100001001111110
151	15	1000010100111001	322	15	1000010111110000	493	15	1000010011111100
152	15	1000010010111001	323	15	100001010110000	494	15	100001000111110
153	15	100001000011001	324	15	100001010010000	495	15	100001000111100
154	16	1000011110011001	325	15	100001001010000	496	16	100001111111110
155	16	1000011101011001	326	15	100001000010000	497	16	1000011111111100
156	16	1000011101001001	327	16	1000011110010000	498	16	1000011111011110
157	16	1000011110001001	328	16	1000011101010000	499	16	1000011111011100

158	15	100001000001001	329	16	1000011101000000	500	16	100001110111110
159	15	100001001001001	330	16	1000011100000000	501	16	100001110111110
160	15	100001010001001	331	15	1000010000000000	502	16	1000011101111100
161	15	100001010101001	332	15	1000010010000000	503	16	1000011100111110
162	15	100001011101001	333	15	1000010100000000	504	16	1000011100111100
163	15	100001011001001	334	15	1000010101000000	505	16	1000011100101110
164	15	100001001101001	335	15	1000010111000000	506	16	1000011100101100
165	15	100001000101001	336	15	1000010110000000	507	16	1000011100100110
166	16	1000011111101001	337	15	1000010011000000	508	16	1000011100100100
167	16	1000011111001001	338	15	1000010001000000	509	16	1000011100011110
168	16	1000011110101001	339	16	1000011111100000	510	16	1000011100011100
169	16	1000011101101001	340	16	1000011111000000	511	16	1000011100011010
170	15	1000011100000001	341	16	1000011101000000			

## B.2 Arithmetic Decoding

### B.2.1 Arithmetic decoding for still texture object

To fully initialize the decoder, the function ac\_decoder\_init is called followed by ac\_model\_init respectively:

```
void ac_decoder_init (ac_decoder *acd) {
    int i, t;

    acd->bits_to_go = 0;
    acd->total_bits = 0;
    acd->value = 0;
    for (i=1; i<=Code_value_bits, i++) {
        acd->value = 2*acd->value + input_bit(acd);
    }
    acd->low = 0;
    acd->high = Top_value;
    return;
}

void ac_model_init (ac_model *acm, int nsym) {
    int i;
```

```

acm->nSym = nSym;

acm->freq = (unsigned short *) malloc (nSym*sizeof (unsigned short));
check (!acm->freq, "arithmetic coder model allocation failure");
acm->cfreq = (unsigned short *) calloc (nSym+1, sizeof (unsigned short));
check (!acm->cfreq, "arithmetic coder model allocation failure");

for (i=0; i<acm->nSym; i++) {
    acm->freq[i] = 1;
    acm->cfreq[i] = acm->nSym - i;
}
acm->cfreq[acm->nSym] = 0;

return;
}

```

The acd is structures which contains the decoding variables and whose addresses act as handles for the decoded symbol/bitstreams. The fields bits\_to\_go, buffer, bitstream, and bitstream\_len are used to manage the bits in memory. The low, high, and fbits fields describe the scaled range corresponding to the symbols which have been decoded. The value field contains the currently seen code value inside the range. The total\_bits field contains the total number of bits encoded or used for decoding so far. The values Code\_value\_bits and Top\_value describe the maximum number of bits and the maximum size of a coded value respectively. The ac\_model structure contains the variables used for that particular probability model and it's address acts as a handle. The nSym field contains the number of symbols in the symbol set, the freq field contains the table of frequency counts for each of the nSym symbols, and the cfreq field contains the cumulative frequency count derived from freq.

The bits are read from the bitstream using the function:

```

static int input_bit (ac_decoder *acd) {
    int t;
    unsigned int tmp;

    if (acd->bits_to_go==0) {
        acd->buffer = ace->bitstream[ace->bitstream_len++];
        acd->bits_to_go = 8;
    }
}

```

```

t = acd->buffer & 0x080;
acd->buffer <= 1;
acd->buffer &= 0x0ff;
acd->total_bits += 1;
acd->bits_to_go -= 1;
t = t >> 7;

return t;
}

```

The decoding process has four main steps. The first step is to decode the symbol based on the current state of the probability model (frequency counts) and the current code value (value) which is used to represent (and is a member of) the current range. The second step is to get the new range. The third step is to rescale the range and simultaneously load in new code value bits. The fourth step is to update the model. To decode symbols, the following function is called:

```

int ac_decode_symbol (ac_decoder *acd, ac_model *acm) {
    long range;
    int cum;
    int sym;

    range = (long)(acd->high-acd->low)+1;

    /*--- decode symbol ---*/
    cum = (((long)(acd->value-acd->low)+1)*(int)(acm->cfreq[0])-1)/range;
    for (sym = 0; (int)acm->cfreq[sym+1]>cum; sym++)
        /* do nothing */;

    check (sym<0||sym>=acm->nsm, "symbol out of range");

    /*--- Get new range ---*/
    acd->high = acd->low + (range*(int)(acm->cfreq[sym]))/(int)(acm->cfreq[0])-1;
    acd->low = acd->low + (range*(int)(acm->cfreq[sym+1]))/(int)(acm->cfreq[0]);

    /*--- rescale and load new code value bits ---*/
}

```

```

for (;;) {
    if (acd->high<Half) {
        /* do nothing */

    } else if (acd->low>=Half) {
        acd->value -= Half;
        acd->low -= Half;
        acd->high -= Half;

    } else if (acd->low>=First_qtr && acd->high<Third_qtr) {
        acd->value -= First_qtr;
        acd->low -= First_qtr;
        acd->high -= First_qtr;

    } else
        break;

    acd->low = 2*acd->low;
    acd->high = 2*acd->high+1;
    acd->value = 2*acd->value + input_bit(acd);
}

/*--- Update probability model ---*/
update_model (acm, sym);

return sym;
}

```

The bits\_plus\_follow function mentioned above calls another function, output\_bit. They are:

```

static void output_bit (ac_encoder *ace, int bit) {
    ace->buffer <= 1;
    if (bit)
        ace->buffer |= 0x01;

    ace->bits_to_go -= 1;
    ace->total_bits += 1;
}

```

```

if (ace->bits_to_go==0) {

    if (ace->bitstream) {
        if (ace->bitstream_len >= MAX_BUFFER)
            if ((ace->bitstream = (uChar *)realloc(ace->bitstream, sizeof(uChar)*
                (ace->bitstream_len/MAX_BUFFER+1)*MAX_BUFFER))==NULL) {
                fprintf(stderr, "Couldn't  reallocate  memory  for  ace->bitstream  in
output_bit.\n");
                exit(-1);
            }
        ace->bitstream[ace->bitstream_len++] = ace->buffer;
    }
    ace->bits_to_go = 8;
}

return;
}

static void bit_plus_follow (ac_encoder *ace, int bit) {
    output_bit (ace, bit);
    while (ace->fbits > 0) {
        output_bit (ace, !bit);
        ace->fbits -= 1;
    }
    return;
}

```

The update of the probability model used in the decoding of the symbols is shown in the following function:

```

static void update_model (ac_model *acm, int sym)
{

```

```

int i;

if (acm->cfreq[0]==Max_frequency) {

    int cum = 0;

    acm->cfreq[acm->nsym] = 0;

    for (i = acm->nsym-1; i>=0; i--) {

        acm->freq[i] = ((int)acm->freq[i] + 1) / 2;

        cum += acm->freq[i];

        acm->cfreq[i] = cum;

    }

}

acm->freq[sym] += 1;

for (i=sym; i>=0; i--)

    acm->cfreq[i] += 1;

return;

}

```

This function simply updates the frequency counts based on the symbol just decoded. It also makes sure that the maximum frequency allowed is not exceeded. This is done by rescaling all frequency counts by 2.

## B.2.2 Arithmetic decoding for shape decoding

### B.2.2.1 Structures and Typedefs

```

typedef void Void;
typedef int Int;
typedef unsigned short int USInt;
#define CODE_BIT 32
#define HALF ((unsigned) 1 << (CODE_BITS-1))
#define QUARTER (1 << (CODE_BITS-2))
struct arcodec {
    UInt L; /* lower bound */
    UInt R; /* code range */
    UInt V; /* current code value */
    UInt arpipe;
    Int bits_to_follow; /* follow bit count */
    Int first_bit;
    Int nzeros;
    Int nonzero;
    Int nzerosf;
    Int extrabits;
};

typedef struct arcodec ArCoder;

```

```

typedef struct arcodec ArDecoder;
#define MAXHEADING 3
#define MAXMIDDLE 10
#define MAXTRAILING 2

```

### B.2.2.2 Decoder Source

```

Void StartArDecoder(ArDecoder *decoder, Bitstream *bitstream) {
    Int i,j;
    decoder->V = 0;
    decoder->nzerosf = MAXHEADING;
    decoder->extrabits = 0;
    for (i = 1; i<CODE_BITS; i++) {
        j=BitstreamLookBit(bitstream,i+decoder->extrabits);
        decoder->V += decoder->V + j;
        if (j == 0) {
            decoder->nzerosf--;
            if (decoder->nzerosf == 0) {
                decoder->extrabits++;
                decoder->nzerosf = MAXMIDDLE;
            }
        }
        else
            decoder->nzerosf = MAXMIDDLE;
    }
    decoder->L = 0;
    decoder->R = HALF - 1;
    decoder->bits_to_follow = 0;
    decoder->arpipe = decoder->V;
    decoder->nzeros = MAXHEADING;
    decoder->nonzero = 0;
}
Void StopArDecoder(ArDecoder *decoder, Bitstream *bitstream) {
    Int a = decoder->L >> (CODE_BITS-3);
    Int b = (decoder->R + decoder->L) >> (CODE_BITS-3);
    Int nbits,i;
    if (b == 0)
        b = 8;
    if (b-a >= 4 || (b-a == 3 && a&1))
        nbits = 2;
    else
        nbits = 3;
    for (i = 1; i<= nbits-1; i++)
        AddNextInputBit(bitstream, decoder);
    if (decoder->nzeros < MAXMIDDLE-MAXTRAILING || decoder->nonzero == 0)
        BitstreamFlushBits(bitstream,1);
}
Void AddNextInputBit(Bitstream *bitstream, ArDecoder *decoder) {
    Int i;
    if (((decoder->arpipe >> (CODE_BITS-2))&1) == 0) {
        decoder->nzeros--;
        if (decoder->nzeros == 0) {
            BitstreamFlushBits(bitstream,1);
            decoder->extrabits--;
            decoder->nzeros = MAXMIDDLE;
            decoder->nonzero = 1;
        }
    }
    else {
        decoder->nzeros = MAXMIDDLE;
    }
}

```

```

        decoder->nonzero = 1;
    }
    BitstreamFlushBits(bitstream,1);
    i = (Int)BitstreamLookBit(bitstream, CODE_BITS-1+decoder->extrabits);
    decoder->V += decoder->V + i;
    decoder->arpipe += decoder->arpipe + i;
    if (i == 0) {
        decoder->nzerosf--;
        if (decoder->nzerosf == 0) {
            decoder->nzerosf = MAXMIDDLE;
            decoder->extrabits++;
        }
    }
    else
        decoder->nzerosf = MAXMIDDLE;
}
Int ArDecodeSymbol(USInt c0, ArDecoder *decoder, Bitstream *bitstream ) {
    Int bit;
    Int c1 = (1<<16) - c0;
    Int LPS = c0 > c1;
    Int cLPS = LPS ? c1 : c0;
    unsigned long rLPS;
    rLPS = ((decoder->R) >> 16) * cLPS;
    if ((decoder->V - decoder->L) >= (decoder->R - rLPS)) {
        bit = LPS;
        decoder->L += decoder->R - rLPS;
        decoder->R = rLPS;
    }
    else {
        bit = (1-LPS);
        decoder->R -= rLPS;
    }
    DECODE_RENORMALISE(decoder,bitstream);
    return(bit);
}
Void DECODE_RENORMALISE(ArDecoder *decoder, Bitstream *bitstream) {
    while (decoder->R < QUARTER) {
        if (decoder->L >= HALF) {
            decoder->V -= HALF;
            decoder->L -= HALF;
            decoder->bits_to_follow = 0;
        }
        else
            if (decoder->L + decoder->R <= HALF)
                decoder->bits_to_follow = 0;
            else{
                decoder->V -= QUARTER;
                decoder->L -= QUARTER;
                (decoder->bits_to_follow)++;
            }
        decoder->L += decoder->L;
        decoder->R += decoder->R;
        AddNextInputBit(bitstream, decoder);
    }
}

```

- BitstreamLookBit(bitstream,nbits) : Looks nbits ahead in the bitstream beginning from the current position in the bitstream and returns the bit.
- BitstreamFlushBits(bitstream,nbits) : Moves the current bitstream position forward by nbits.

The parameter c0 (used in ArDecodeSymbol()) is taken directly from the probability tables of USint inter\_prob or Usint intra\_prob in Table B-32. That is, for the pixel to be coded/decoded, c0 is the probability that this pixel is equal to zero. The value of c0 depends on the context number of the given pixel to be decoded.

### B.2.3 Face Object Decoding

In FAP decoder, a symbol is decoded by using a specific model based on the syntax and by calling the following procedure which is specified in C.

```
static long low, high, code_value, bit, length, sacindex, cum, zerorun=0;

int aa_decode(int cumul_freq[ ])
{
    length = high - low + 1;
    cum = (-1 + (code_value - low + 1) * cumul_freq[0]) / length;
    for (sacindex = 1; cumul_freq[sacindex] > cum; sacindex++);
    high = low - 1 + (length * cumul_freq[sacindex-1]) / cumul_freq[0];
    low += (length * cumul_freq[sacindex]) / cumul_freq[0];

    for ( ; ; ) {
        if (high < q2) ;
        else if (low >= q2) {
            code_value -= q2;
            low -= q2;
            high -= q2;
        }
        else if (low >= q1 && high < q3) {
            code_value -= q1;
            low -= q1;
            high -= q1;
        }
        else {
            break;
        }
        low *= 2;
        high = 2*high + 1;
        bit_out_psc_layer();
        code_value = 2*code_value + bit;
        used_bits++;
    }
    return (sacindex+1);
}

void bit_out_psc_layer()
{
    bit = getbits(1);
}
```

Again the model is specified through cumul\_freq[ ]. The decoded symbol is returned through its index in the model. The decoder is initialized to start decoding an arithmetic coded bitstream by calling the following procedure.

```
void decoder_reset( )
{
    int i;
    zerorun = 0;           /* clear consecutive zero's counter */
    code_value = 0;
    low = 0;
    high = top;
    for (i = 1; i <= 16; i++) {
```

```
    bit_out_psc_layer();
    code_value = 2 * code_value + bit;
}
used_bits = 0;
}
```

IECNORM.COM : Click to view the full PDF of ISO/IEC 14496-2:1999

## Annex C

(normative)

### Face object decoding tables and definitions

FAPs names may contain letters with the following meaning: l = left, r = right, t = top, b = bottom, i = inner, o = outer, m = middle. The sum of two corresponding top and bottom eyelid FAPs must equal 1024 when the eyelids are closed. Inner lips are closed when the sum of two corresponding top and bottom lip FAPs equals zero. For example: (lower\_t\_midlip + raise\_b\_midlip) = 0 when the lips are closed. All directions are defined with respect to the face and not the image of the face.

Table C-1 -- FAP definitions, group assignments and step sizes

#	FAP name	FAP description	units	Uni- orBi- dir	Pos motion	G r p	FDP subg rp num	Qua nt step size	Min/Max I-Frame quantize d values	Min/Max P-Frame quantiz ed values
1	viseme	Set of values determining the mixture of two visemes for this frame (e.g. pbm, fv, th)	na	na	na	1	na	1	viseme_b lend: +63	viseme_ blend: +- 63
2	expression	A set of values determining the mixture of two facial expression	na	na	na	1	na	1	expressio n_intensit y1, expressio n_intensit y2: +63	expressi on_inten sity1, expressi on_inten sity2: +- 63
3	open_jaw	Vertical jaw displacement (does not affect mouth opening)	MNS	U	down	2	1	4	+1080	+360
4	lower_t_midlip	Vertical top middle inner lip displacement	MNS	B	down	2	2	2	+600	+180
5	raise_b_midlip	Vertical bottom middle inner lip displacement	MNS	B	up	2	3	2	+1860	+600
6	stretch_l_cornerlip	Horizontal displacement of left inner lip corner	MW	B	left	2	4	2	+600	+180
7	stretch_r_cornerlip	Horizontal displacement of right inner lip corner	MW	B	right	2	5	2	+600	+180
8	lower_t_lip_lm	Vertical	MNS	B	down	2	6	2	+600	+180

		displacement of midpoint between left corner and middle of top inner lip								
9	lower_t_lip_rm	Vertical displacement of midpoint between right corner and middle of top inner lip	MNS	B	down	2	7	2	+600	+180
10	raise_b_lip_lm	Vertical displacement of midpoint between left corner and middle of bottom inner lip	MNS	B	up	2	8	2	+1860	+600
11	raise_b_lip_rm	Vertical displacement of midpoint between right corner and middle of bottom inner lip	MNS	B	up	2	9	2	+1860	+600
12	raise_l_cornerlip	Vertical displacement of left inner lip corner	MNS	B	up	2	4	2	+600	+180
13	raise_r_cornerlip	Vertical displacement of right inner lip corner	MNS	B	up	2	5	2	+600	+180
14	thrust_jaw	Depth displacement of jaw	MNS	U	forward	2	1	1	+600	+180
15	shift_jaw	Side to side displacement of jaw	MW	B	right	2	1	1	+1080	+360
16	push_b_lip	Depth displacement of bottom middle lip	MNS	B	forward	2	3	1	+1080	+360
17	push_t_lip	Depth displacement of top middle lip	MNS	B	forward	2	2	1	+1080	+360
18	depress_chin	Upward and compressing movement of the chin (like in sadness)	MNS	B	up	2	10	1	+420	+180
19	close_t_l_eyelid	Vertical displacement of top left eyelid	IRISD	B	down	3	1	1	+1080	+600
20	close_t_r_eyelid	Vertical displacement of top right eyelid	IRISD	B	down	3	2	1	+1080	+600
21	close_b_l_eyelid	Vertical displacement of bottom left eyelid	IRISD	B	up	3	3	1	+600	+240

IECIFORM.COM - Click to view the full PDF of ISO/IEC 14496-2:1999

22	close_b_r_eyelid	Vertical displacement of bottom right eyelid	IRISD	B	up	3	4	1	+600	+240
23	yaw_l_eyeball	Horizontal orientation of left eyeball	AU	B	left	3	na	128	+1200	+420
24	yaw_r_eyeball	Horizontal orientation of right eyeball	AU	B	left	3	na	128	+1200	+420
25	pitch_l_eyeball	Vertical orientation of left eyeball	AU	B	down	3	na	128	+900	+300
26	pitch_r_eyeball	Vertical orientation of right eyeball	AU	B	down	3	na	128	+900	+300
27	thrust_l_eyeball	Depth displacement of left eyeball	ES	B	forward	3	na	1	+600	+180
28	thrust_r_eyeball	Depth displacement of right eyeball	ES	B	forward	3	na	1	+600	+180
29	dilate_l_pupil	Dilation of left pupil	IRISD	B	growing	3	5	1	+420	+120
30	dilate_r_pupil	Dilation of right pupil	IRISD	B	growing	3	6	1	+420	+120
31	raise_l_i_eyebrow	Vertical displacement of left inner eyebrow	ENS	B	up	4	1	2	+900	+360
32	raise_r_i_eyebrow	Vertical displacement of right inner eyebrow	ENS	B	up	4	2	2	+900	+360
33	raise_l_m_eyebrow	Vertical displacement of left middle eyebrow	ENS	B	up	4	3	2	+900	+360
34	raise_r_m_eyebrow	Vertical displacement of right middle eyebrow	ENS	B	up	4	4	2	+900	+360
35	raise_l_o_eyebrow	Vertical displacement of left outer eyebrow	ENS	B	up	4	5	2	+900	+360
36	raise_r_o_eyebrow	Vertical displacement of right outer eyebrow	ENS	B	up	4	6	2	+900	+360
37	squeeze_l_eyebrow	Horizontal displacement of left eyebrow	ES	B	right	4	1	1	+900	+300
38	squeeze_r_eyebrow	Horizontal displacement of right eyebrow	ES	B	left	4	2	1	+900	+300
39	puff_l_cheek	Horizontal displacement of left cheek	ES	B	left	5	1	2	+900	+300

40	puff_r_cheek	Horizontal displacement of right cheek	ES	B	right	5	2	2	+900	+300
41	lift_l_cheek	Vertical displacement of left cheek	ENS	U	up	5	3	2	+600	+180
42	lift_r_cheek	Vertical displacement of right cheek	ENS	U	up	5	4	2	+600	+180
43	shift_tongue_tip	Horizontal displacement of tongue tip	MW	B	right	6	1	1	+1080	+420
44	raise_tongue_tip	Vertical displacement of tongue tip	MNS	B	up	6	1	1	+1080	+420
45	thrust_tongue_tip	Depth displacement of tongue tip	MW	B	forward	6	1	1	+1080	+420
46	raise_tongue	Vertical displacement of tongue	MNS	B	up	6	2	1	+1080	+420
47	tongue_roll	Rolling of the tongue into U shape	AU	U	concave upward	6	3, 4	512	+300	+60
48	head_pitch	Head pitch angle from top of spine	AU	B	down	7	na	170	+1860	+600
49	head_yaw	Head yaw angle from top of spine	AU	B	left	7	na	170	+1860	+600
50	head_roll	Head roll angle from top of spine	AU	B	right	7	na	170	+1860	+600
51	lower_t_midlip_o	Vertical top middle outer lip displacement	MNS	B	down	8	1	2	+600	+180
52	raise_b_midlip_o	Vertical bottom middle outer lip displacement	MNS	B	up	8	2	2	+1860	+600
53	stretch_l_cornerlip_o	Horizontal displacement of left outer lip corner	MW	B	left	8	3	2	+600	+180
54	stretch_r_cornerlip_o	Horizontal displacement of right outer lip corner	MW	B	right	8	4	2	+600	+180
55	lower_t_lip_lm_o	Vertical displacement of midpoint between left corner and middle of top outer lip	MNS	B	down	8	5	2	+600	+180
56	lower_t_lip_rm_o	Vertical	MNS	B	down	8	6	2	+600	+180

IEC FORM COPIES TO view the full PDF of ISO/IEC 14496-2:1999

		displacement of midpoint between right corner and middle of top outer lip								
57	raise_b_lip_lm_o	Vertical displacement of midpoint between left corner and middle of bottom outer lip	MNS	B	up	8	7	2	+1860	+600
58	raise_b_lip_rm_o	Vertical displacement of midpoint between right corner and middle of bottom outer lip	MNS	B	up	8	8	2	+1860	+600
59	raise_l_cornerlip_o	Vertical displacement of left outer lip corner	MNS	B	up	8	3	2	+600	+180
60	raise_r_cornerlip_o	Vertical displacement of right outer lip corner	MNS	B	up	8	4	2	+600	+180
61	stretch_l_nose	Horizontal displacement of left side of nose	ENS	B	left	9	1	1	+540	+120
62	stretch_r_nose	Horizontal displacement of right side of nose	ENS	B	right	9	2	1	+540	+120
63	raise_nose	Vertical displacement of nose tip	ENS	B	up	9	3	1	+680	+180
64	bend_nose	Horizontal displacement of nose tip	ENS	B	right	9	3	1	+900	+180
65	raise_l_ear	Vertical displacement of left ear	ENS	B	up	10	1	1	+900	+240
66	raise_r_ear	Vertical displacement of right ear	ENS	B	up	10	2	1	+900	+240
67	pull_l_ear	Horizontal displacement of left ear	ENS	B	left	10	3	1	+900	+300
68	pull_r_ear	Horizontal displacement of right ear	ENS	B	right	10	4	1	+900	+300


**Table C-2 -- FAP grouping**

<b>Group</b>	<b>Number of FAPs</b>
1: visemes and expressions	2
2: jaw, chin, inner lowerlip, cornerlips, midlip	16
3: eyeballs, pupils, eyelids	12
4: eyebrow	8
5: cheeks	4
6: tongue	5
7: head rotation	3
8: outer lip positions	10
9: nose	4
10: ears	4

In the following, each facial expression is defined by a textual description and a pictorial example. (reference [10], page 114.) This reference was also used for the characteristics of the described expressions.

**Table C-3 -- Values for expression\_select**

<b>expression_select</b>	<b>expression name</b>	<b>textual description</b>
0	na	na
1	joy	The eyebrows are relaxed. The mouth is open and the mouth corners pulled back toward the ears.
2	sadness	The inner eyebrows are bent upward. The eyes are slightly closed. The mouth is relaxed.
3	anger	The inner eyebrows are pulled downward and together. The eyes are wide open. The lips are pressed against each other or opened to expose the teeth.
4	fear	The eyebrows are raised and pulled together. The inner eyebrows are bent upward. The eyes are tense and alert.
5	disgust	The eyebrows and eyelids are relaxed. The upper lip is raised and curled, often asymmetrically.
6	surprise	The eyebrows are raised. The upper eyelids are wide open, the lower relaxed. The jaw is opened.

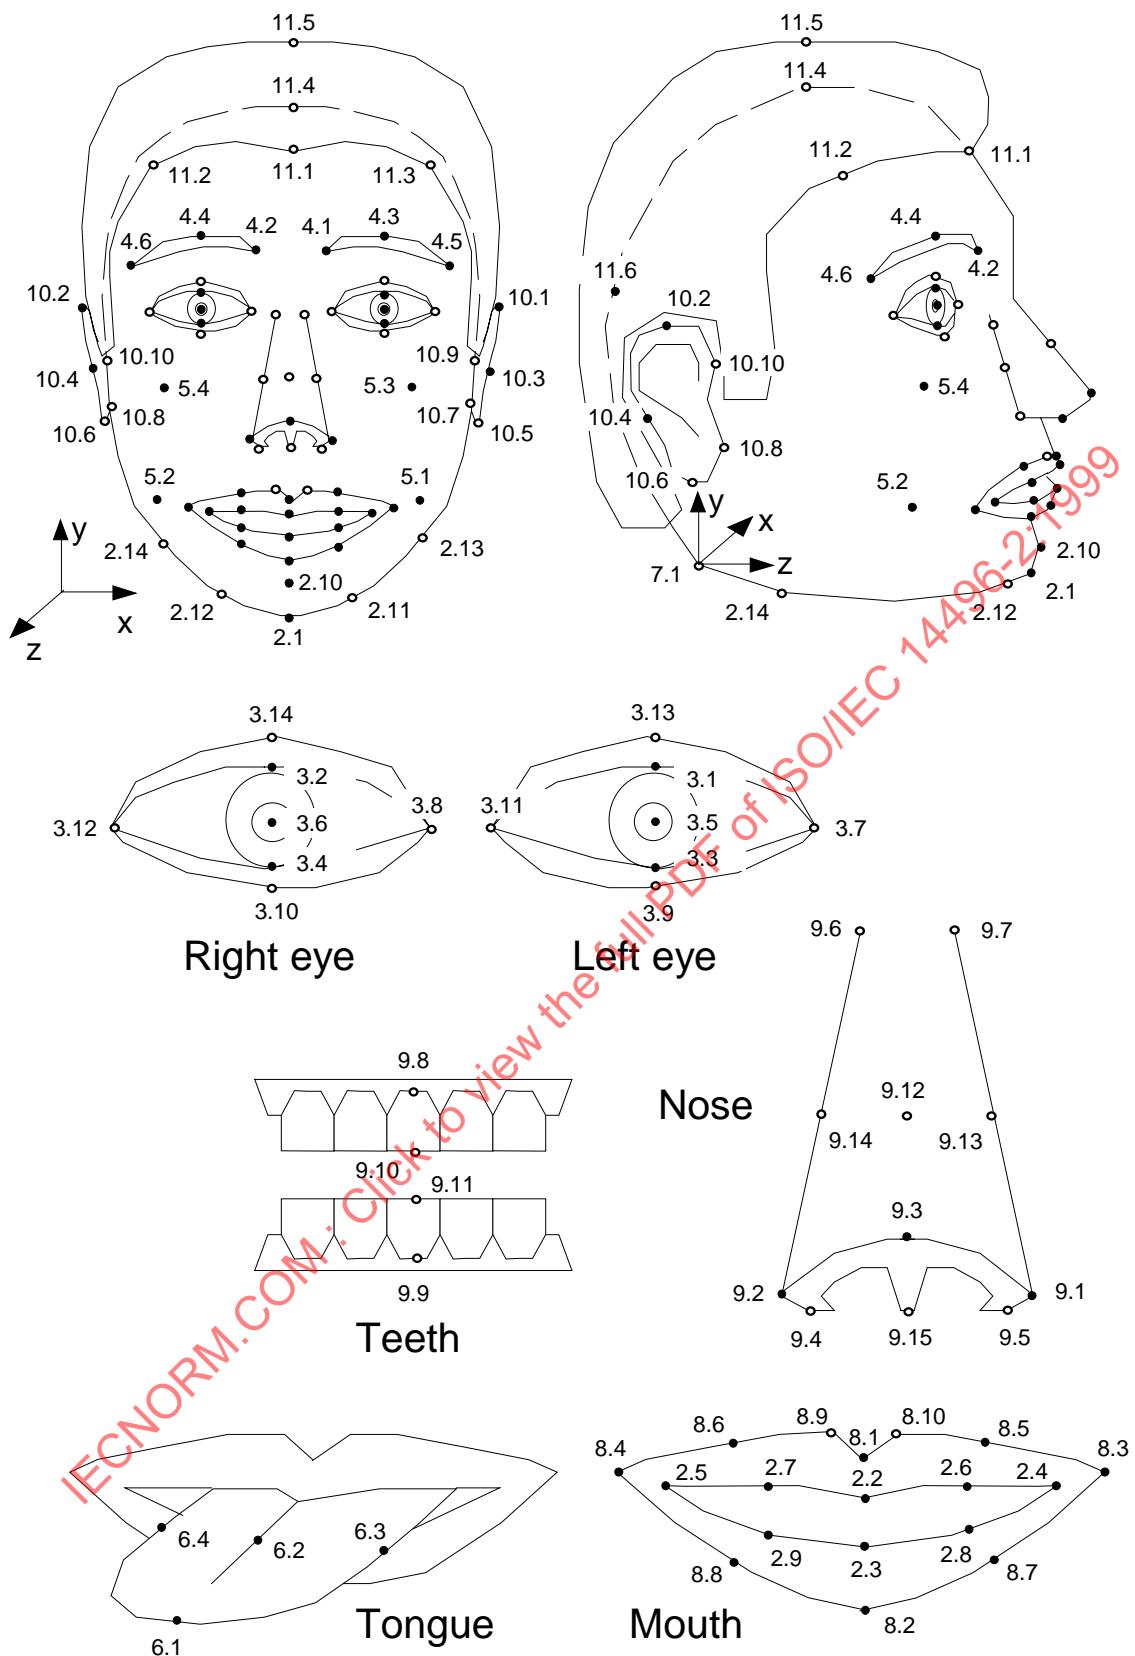

- Feature points affected by FAPs
- Other feature points

**Figure C-1 -- FDP feature point set**

In the following, the notation 2.1.x indicates the x coordinate of feature point 2.1.