

# AEROSPACE INFORMATION REPORT

**SAE** AIR1558

REV.  
A

Issued 1978-10  
Revised 1997-09  
Reaffirmed 2005-02

Superseding AIR1558

## Interface Protective Devices - Ground Equipment to Aircraft

### 1. SCOPE:

The protective device hereinafter called a "fender" is intended to serve its purpose during normal aircraft servicing and prevent damage during docking contact rather than aggressive impact.

#### 1.1 Purpose:

This SAE Aerospace Information Report (AIR) discusses damage to aircraft caused by ground equipment contact and suggests methods of protecting against that damage.

### 2. REFERENCES:

The following publications form a part of this specification to the extent specified herein. The latest issue of SAE publications shall apply. The applicable issue of other publications shall be the issue in effect on the date of the purchase order. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

#### 2.1 SAE Publications:

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

ARP1247 General Requirements for Aerospace Ground Support Equipment Motorized and Nonmotorized

#### 2.2 ASTM Publications:

Available from ASTM, 100 Barr Harbor, West Conshohocken, PA 19428-2959.

ASTM D 412 Test Methods for Vulcanized Rubber and Thermoplastic Rubber and Thermoplastic Elastomers

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2005 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)  
Tel: 724-776-4970 (outside USA)  
Fax: 724-776-0790  
Email: [custsvc@sae.org](mailto:custsvc@sae.org)  
http://www.sae.org

SAE WEB ADDRESS:

**SAE values your input. To provide feedback  
on this Technical Report, please visit  
<http://www.sae.org/technical/standards/AIR1558A>**

### 3. GENERAL DISCUSSION, MATERIALS, AND APPLICATION:

#### 3.1 Fenders General:

Most ground equipment damage to aircraft is described as skin punctures, dents, and abrasions in the fuselage areas adjacent to and below passenger, cargo, and galley doors. These loading and servicing areas are served by various types of servicing equipment. Most of these are equipped with rubber cylinders and/or other protective pads, positioned on the equipment at points normally in contact with, or in proximity to, the aircraft skin during servicing. Widely differing methods of installation and varying materials of these devices exist. Some of these have contributed directly to aircraft damage.

#### 3.2 Operation General:

It is necessary also to examine the approach of vehicles and equipment to the aircraft fuselage. Some servicing positions are at points on the aircraft where the fuselage tapers. This tapering may cause the driver and signalman to misjudge the interface with the airplane. The contacting surface may then be jammed against the fuselage. Also, some positions may not permit the vehicle contact surfaces to be brought parallel to the fuselage. Care must be taken to keep fender contacting surfaces sufficiently away from the fuselage to prevent over-compression if the aircraft settles.

#### 3.3 Application:

All ground equipment used in direct contact with or proximity to the aircraft should be fitted with nonmarring cushion devices known as "fenders". Any portion of the equipment which normally comes within 6 in (150 mm) of aircraft in normal operation should be so equipped.

#### 3.4 Characteristics:

3.4.1 Fenders shall be functional in all environmental conditions as outlined in ARP1247.

3.4.2 Fenders must resist lubricants, fluids, and solvents used in aircraft servicing and maintenance.

3.4.3 Fender material shall be of a nonscuffing, nonmarring type material.

3.4.4 Tensile strength of fender material shall be a minimum of 1200 psi (8.27 MPa).

3.4.5 Fender tear strength shall be a minimum of 650 pli (1.14 kN/cm).

3.4.6 Fender hardness shall have a nominal rating (Shore-A) per Section 5.

3.4.7 Elongation rating of all fenders shall be a minimum of 65%.

#### 4. DAMAGE CAUSES AND METHODS OF CONTROL:

##### 4.1 Excessive Approach Speed:

Speed should be reduced appropriately when maneuvering near the aircraft. Docking speed of about 1 in/s (25 mm/s) should be initiated at approximately 18 in (457 mm) prior to contact with the working surface. Judgment/caution should be applied so as not to cause an aggressive contact with the aircraft (see 6.1.1).

##### 4.2 Inadequate Coverage of Contact Area:

Fenders should not be too short, failing to cover the entire length of contact area or leaving sharp cutting ends exposed. Cylinders should wrap around or extend beyond ends at least 2 in (50 mm). Item 2B, Figure 1, depicts correct design.

##### 4.3 Cylinder Thickness Not Adequate:

Large hexagonal head bolts may pierce the thin-walled (approximately .25 in (6 mm), Item 3, Figure 1) rubber cylinder and then contact the aircraft skin. At the ends the cylinders compress easiest, therefore the thin-walled cylinder is especially ineffective in preventing aircraft damage.

##### 4.4 Incorrect Choice of Fender:

Consideration must be given to type of equipment and aircraft area contact. Some units have a sort of "pecking" action when braked and require fenders such as type "O" with greater compressibility.

##### 4.5 Rubber Cylinder Deterioration:

Some rubber materials are subject to deterioration from environmental conditions. Aircraft fluid contact with unbuffered rubbers can cause deterioration. An environmentally induced breakdown in the structure of fender can result in deteriorated performance as a protective device.

##### 4.6 Method of Installation:

Of even greater importance than thickness or condition in the effectiveness of these protective devices is the manner in which they are installed (Figure 2).

##### 4.6.1 The ends of the rubber cylinder must extend beyond the steel strap or channel. Item 5A, Figure 1, depicts incorrect design.

##### 4.6.2 The steel strap or channel can penetrate the end walls of the rubber cylinder. The strap is generally affixed to vehicle by large, damage inducing hexagonal head bolts. Channel iron itself also has a cutting edge (see Item 5B, Figure 1). These hazards must be taken into account.

BASIC FENDER INSTALLATION




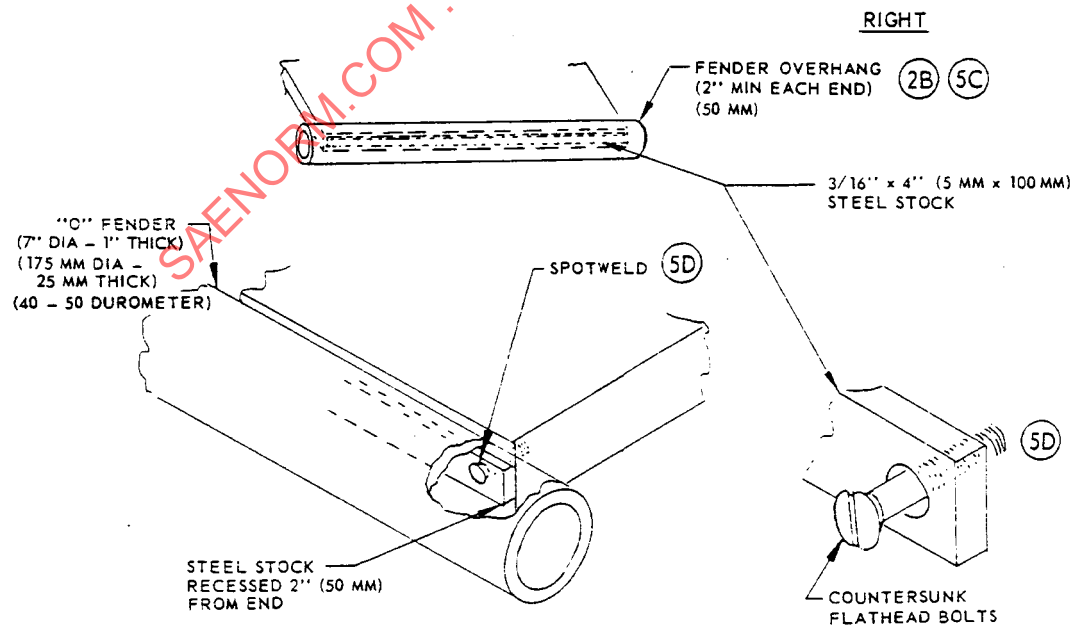


FIGURE 1 - Basic Fender Installation

EXAMPLE OF CORRECT PLACEMENT OF BUMPERS OR FENDERS

WRONG

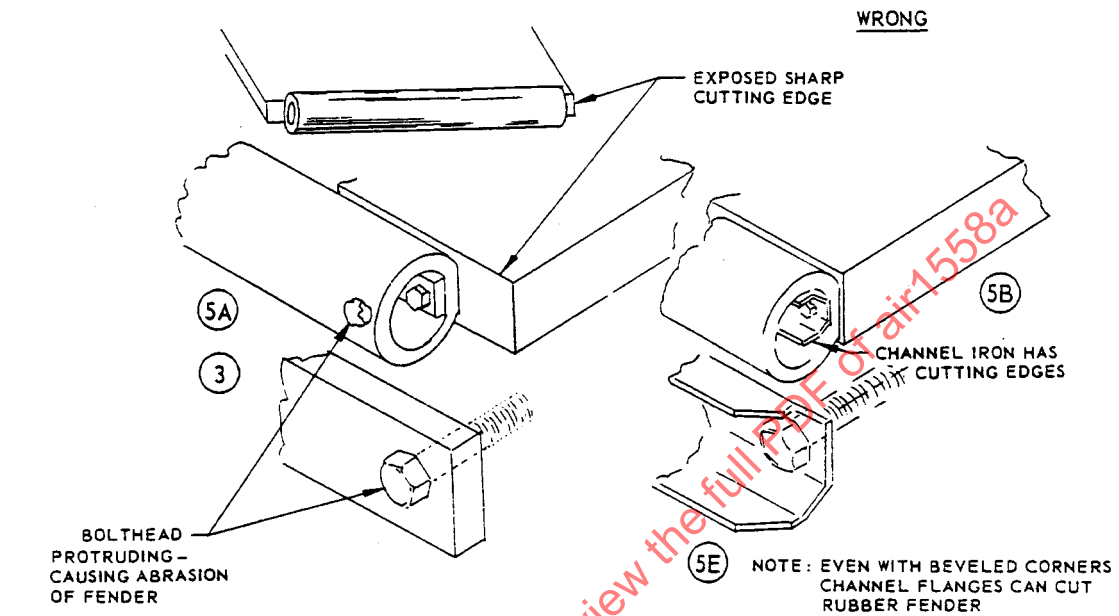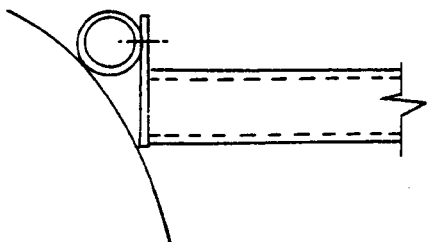

RIGHT

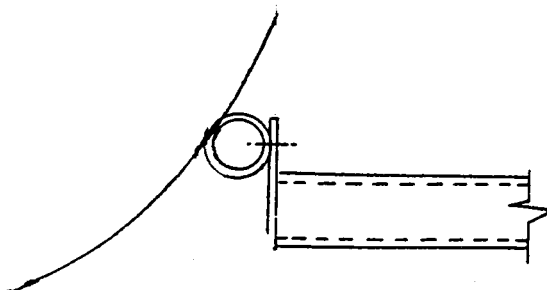
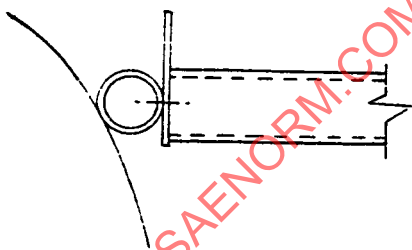


FIGURE 2 - Example of Correct Placement of Bumpers or Fenders

4.6.3: The steel strap or channel iron length should be no longer than the contact area and the rubber cylinder ends should extend beyond the ends of the strap or channel by not less than 2 in (50 mm). Item 5C, Figure 1, depicts correct design. To eliminate damage from hexhead bolts, they can be replaced with countersunk, flathead bolts, tack-welded in place. Item 5D, Figure 1, depicts correct design. To prevent damage from the cutting edges of the channel iron, the ends should be rounded off or beveled. Item 5E, Figure 1, depicts correct design.

## 5. TYPES OF FENDERS AND INSTALLATION PRACTICES:

### 5.1 Variety of Fenders:

The great variety of equipment and configuration of fenders makes it necessary to limit consideration to typical types. Fenders may be expected to differ in many respects by vendor, material, dimensions, and design. Any indication as to recommended type is from the viewpoint of application rather than vendor.

### 5.2 "D" Type Fender:

Shaped in a section like the letter "D" is used primarily on equipment which does not actually dock at the aircraft. It can have a higher durometer rating than A 50 Shore. "D" fenders this size (Figure 3) shall be installed as detailed on Figure 3 with a continuous flat steel bar (Figure 3, Item A), which shall be completely concealed in the finished installation (see 4.6.3). Fenders shall be secured with bolts, studs, or screws, spaced not more than 18 in (457 mm) on centers (Item C, Figure 3). So that fastening bolt heads do not damage skin of aircraft if fender is compressed to its fullest, countersunk flat head fasteners should be used (Item 5D, Figure 1). Access holes and bolt hole diameters should be no larger than necessary for admission of tooling and fasteners.

### 5.3 "O" Type Fender:

Shaped in a section like the letter "O" is used primarily on equipment which contacts the aircraft. As a general rule, these fenders have the softest durometer ratings of A40 to A50 Shore. Installation is similar to "D" type. Being heavier and less rigid, they require a heavier support bar and bolt hole spacing less than 6 in (150 mm). See Figure 1.

TYPE "D" FENDER INSTALLATION  
(DIMENSIONS APPROX)

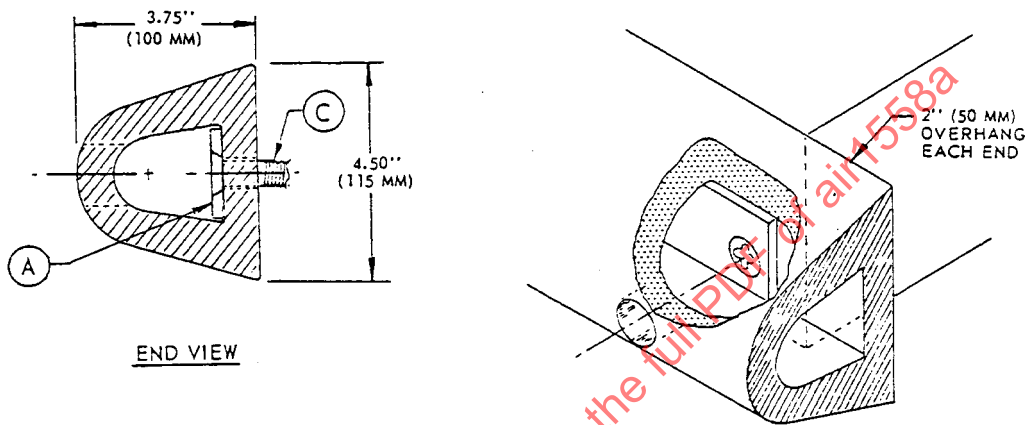


FIGURE 3 - Type "D" Fender Installation  
(Dimensions Approximate)

#### 5.4 "D II" Type Fenders:

Although it is a "D" fender, this cushioning device is used as a substitute for the "O" type. Not quite a true "D", the "D II" is a flexible flat piece of rubber until installed on the equipment facing to form a "D" shape. The "D II" fender is of a harder durometer rating of A50 Shore than the "O" type but is also suitable for face to face contact with aircraft (due to it being .5 in (12 mm) thick, giving it much flexibility). Caution should be used when choosing this type of fender. It has less ability to protect aircraft during docking. This fender allows almost flat transfer of personnel and equipment from the front platform across the fender and into the aircraft (Figure 4). Note in installation Figure 4, Item "A", steel bar is located below platform rubber flap to allow flat transfer, securing screw countersunk per Item "D", Figure 4.

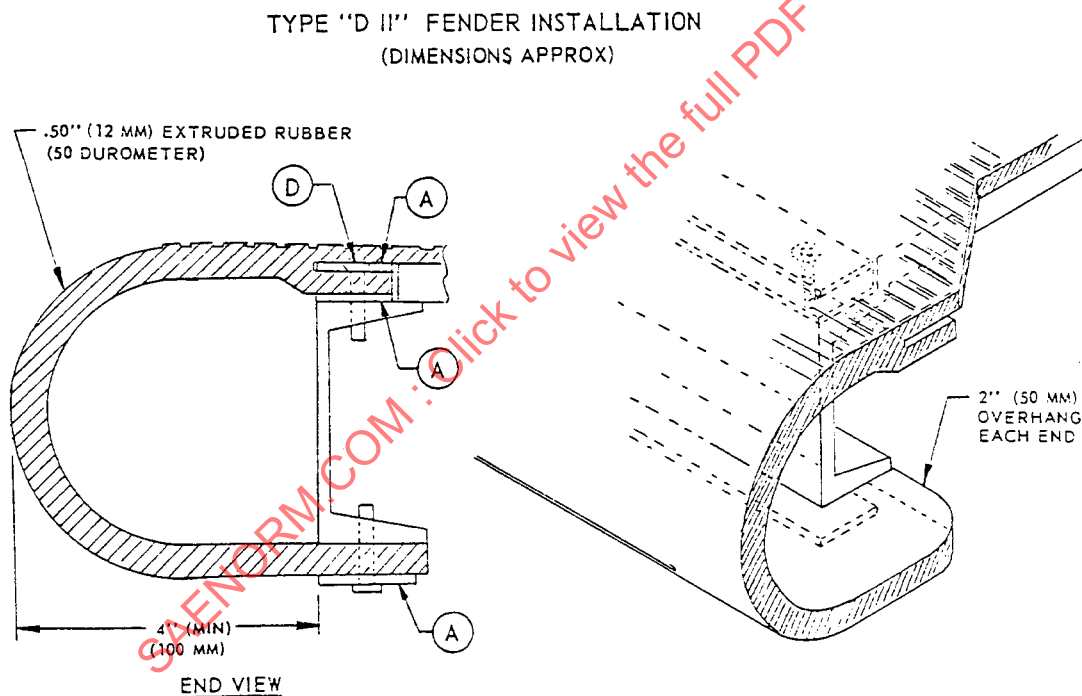


FIGURE 4 - Type "D II" Fender Installation  
(Dimensions Approximate)



5.5 Corner Fenders:

Used on types of equipment which could contact the aircraft at a corner. See Figures 5 and 6. Note that the configuration may be that of a molded soft pad of durometer rating A40 or A50 Shore rather than the more firm vaned type shown. Installation is self-explanatory, with screws or small bolts.

5.6 Padded Pivot Fenders:

These fenders (Figure 7) are generally used on handrails or guardrails that have extendible sections for enclosing the opening between the aircraft and the handrail for guardrail structure. The pivot fender is bolted through the structure and when extended to the aircraft fuselage pivot to fit the fuselage contour (Figure 7, Item A).

5.7 Flat Fenders:

The fenders (Figure 8) are generally used on heavy pieces of equipment which are not required to contact the aircraft structure but do come in proximity to same. They are generally recommended for use on vehicles that service at large door openings on the aircraft where the fender will not make aircraft contact caused by aircraft height changes. The fender is bolted into the face structure of the unit with the bolts recessed appreciably (Figure 8, Item 4).

6. NOTES AND DATA:

6.1 Terminology Used in This Document:

6.1.1 Docking Speed: The average speed of a vehicle during the last 18 in (457 mm) of travel before contact with the aircraft (see 4.1).

6.1.2 Tensile Strength: The ability to puncture rubber measured in pounds per square inch or SI equivalent (Pascal) (refer to ASTM D 412).

6.1.3 Tear Strength: The tearing point measured in pounds per linear inch or SI equivalent (Newton/linear unit).

6.1.4 Durometer: The measurement of compressibility of rubber. The lower the durometer number, the more flexible/compressible.

6.1.5 Shore: Unit of durometer measurement.

6.1.6 Elongation Rating: The maximum elongation/distortion measured in percent by pulling the fender until failure.

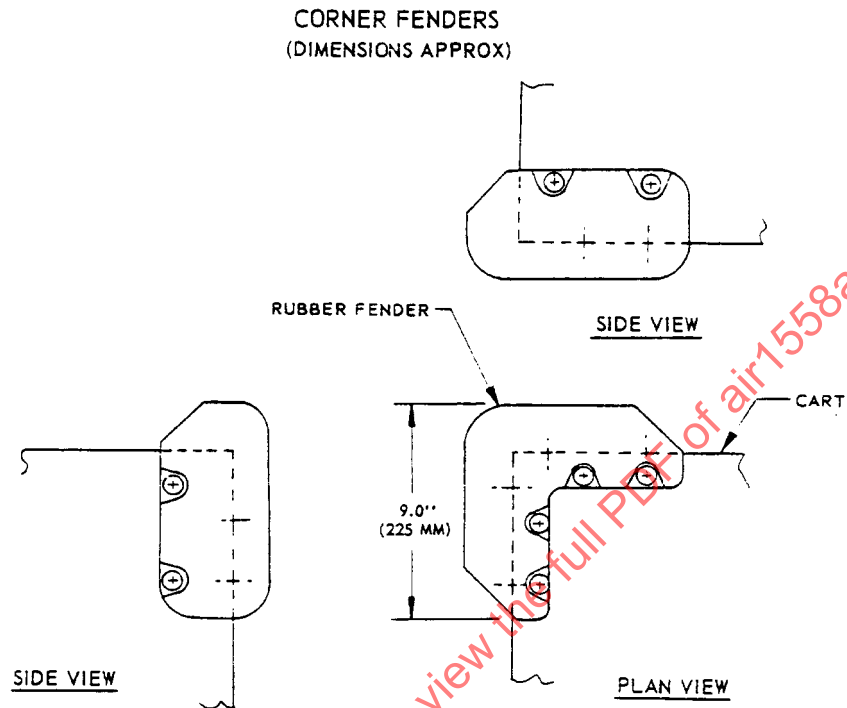


FIGURE 5 - Corner Fenders  
(Dimensions Approximate)

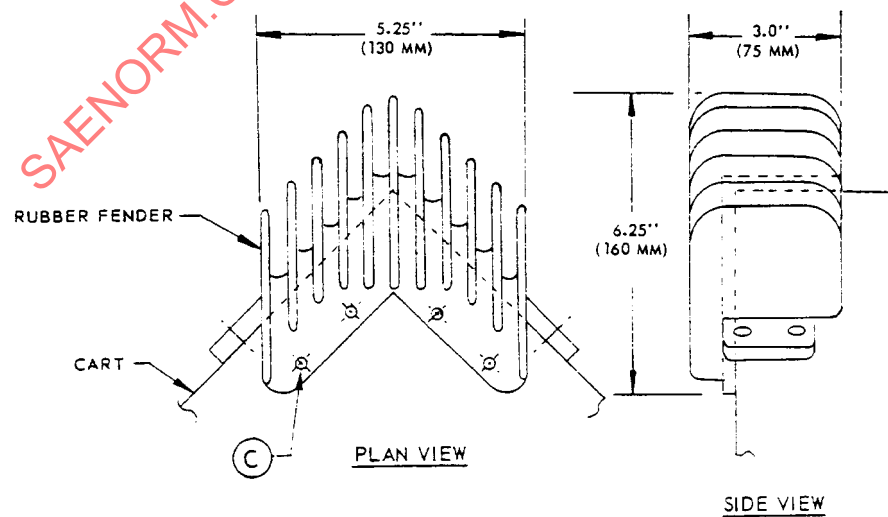


FIGURE 6

FIGURE 6