



SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. C	FEDERAL SUPPLY CLASS	
	NONCURRENT NOTICE THIS SPECIFICATION HAS BEEN DECLARED "NONCURRENT" AS OF JANUARY 2001. IT IS RECOMMENDED, THEREFORE, THAT THIS DOCUMENT NOT BE SPECIFIED FOR NEW DESIGNS. EACH OF THESE "NONCURRENT" DOCUMENTS IS AVAILABLE FROM SAE.	
AS471		
SAENORM.COM : Click to view the full PDF of as471c		
CUSTODIAN: SAE COMMITTEE AE-1		THIRD ANGLE PROJECTION 
SAE The Engineering Society For Advancing Mobility INTERNATIONAL Land Sea Air and Space® 400 Commonwealth Drive, Warrendale, PA 15096-0001	AEROSPACE STANDARD FLANGE-ACCESSORY, 5" BOLT CIRCLE	AS471 SHEET 1 OF 3
		REV. C

ISSUED 1957-11 REVISED 1963-02 NONCURRENT 1971-08 REAFFIRMED NONCURRENT 2001-01

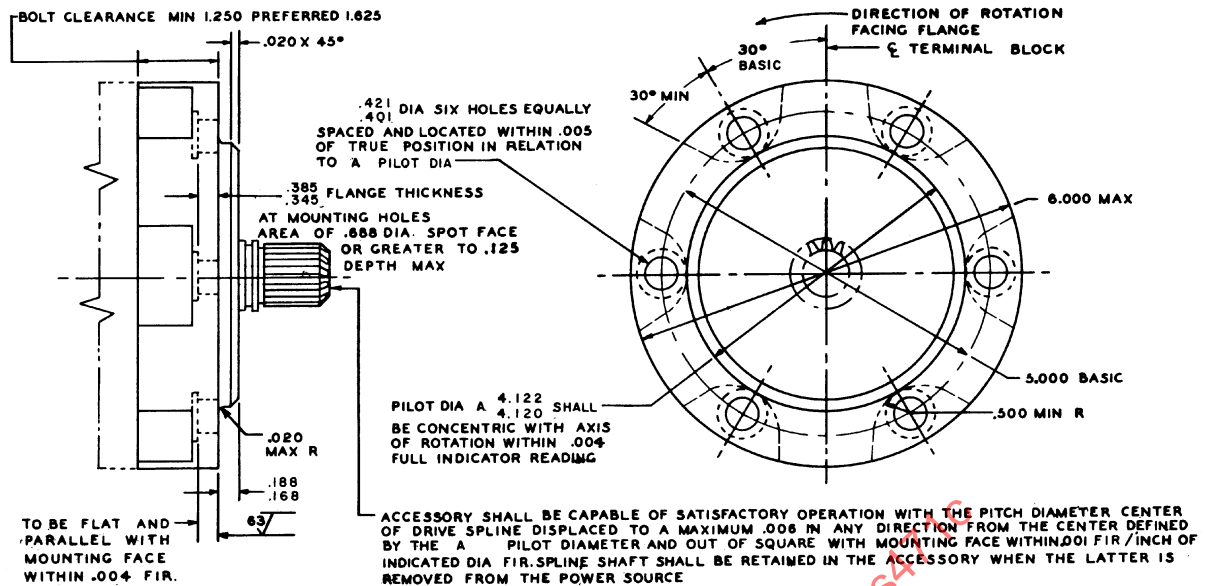

FLANGE TYPE	SPLINE PD	(a) MAX HP VARIABLE SPEED	POWER RATINGS		O RING SIZE	
			(b) MAX HP BASED ON 6000 RPM CONSTANT SPEED	(c) MAX HP BASED ON 8000 RPM CONSTANT SPEED	CROSS SECTION .135-.143	
					ID ACTUAL	OD NOMINAL
A	0.800	30 (15 KVA)	65 (40 KVA)	95 (60 KVA)	0.728-0.740	1.000
B	1.200	85 (40 KVA)	190 (120 KVA)	250 (160 KVA)	1.103-1.115	1.375
C	1.625	190 (90 KVA)	250 (160 KVA)		1.478-1.490	1.750
D	1.875	250 (120 KVA)			1.724-1.744	2.000
E	2.000	335 (160 KVA)			1.849-1.869	2.125

- (a) HP INCLUDES COMBINED EFFICIENCY OF 64% FOR AC GENERATORS AND CONSTANT SPEED TRANSMISSION.
 (b) HP INCLUDES EFFICIENCY OF 85% FOR AC GENERATORS.

THE NOMINAL USE OF THIS FLANGE IS FOR AC AND DC AIRCRAFT GENERATORS, CONSTANT SPEED TRANSMISSIONS (DRIVES), AND HIGH SPEED FLUID POWER PUMPS.

THE STATIC TORSIONAL STRENGTH OF THE ACCESSORY DRIVE SHAFT SHALL NOT EXCEED 5 TIMES THE FULL LOAD TORQUE RATING OF THE ACCESSORY AT MINIMUM RATED SPEED. (FOR AC GENERATORS, FULL LOAD IS BASED ON UNITY POWER FACTOR).

THE ACCESSORY SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE FROM THE DRIVE INTO THE PILOT COMPARTMENT NOT EXCEEDING 3 CC PER HOUR.

IN THE EVENT OF A SHEAR SECTION FAILURE, THE ACCESSORY SHALL BE DESIGNED TO PREVENT DISENGAGEMENT OF THE DRIVE SPLINE COMPONENT.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm .010$, ANGLES $\pm 2^\circ$.

THIS DRAWING AND THE APPLICABLE ACCESSORY SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

FOR EXHAUST SHROUD MOUNTING SURFACES ON AIR COOLED AC AND DC GENERATORS, SEE ARP 554 AND 555.

SURFACE ROUGHNESS SYMBOL $\sqrt{\text{ }}$, AS 291 (AA).

FOR DETAILS OF MATING DRIVE, SEE AS 468.

FOR DETAILS OF SLOTTED MOUNTING HOLE FLANGE, SEE AS 474.

FOR DETAILS OF O RING SEALED MOUNTING FLANGE, SEE AS 481.

THIS IS A DESIGN STANDARD AND IS NOT TO BE USED AS PART NUMBER.