

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-T-7928/7 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-T-7928/7. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

AS7928/7

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM : Click to view the full PDF of as7928 - 1

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS7928/7>

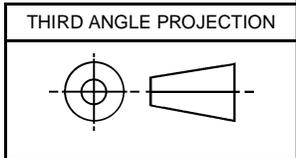


ISSUED 1999-04 REAFFIRMED 2011-01

PREPARED BY SAE SUBCOMMITTEE AE-8C2		PROCUREMENT SPECIFICATION: NONE	
<p>SAE Aerospace An SAE International Group</p>	AEROSPACE STANDARD TERMINAL LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, COPPER, TERMINAL LUG, CRIMP STYLE, COPPER, UNINSULATED, RING TONGUE TYPE I, CLASS 1 FOR 175°C TOTAL CONDUCTOR TEMPERATURE		AS7928/7 SHEET 1 OF 5

THE COMPLETE REQUIREMENTS FOR ACQUIRING THE TERMINALS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-T-7928.

AS7928/7

CONTOUR INDICATED BY PHANTOM LINES MAY VARY FROM THAT SHOWN TO SUIT INDIVIDUAL MANUFACTURER'S DESIGN.

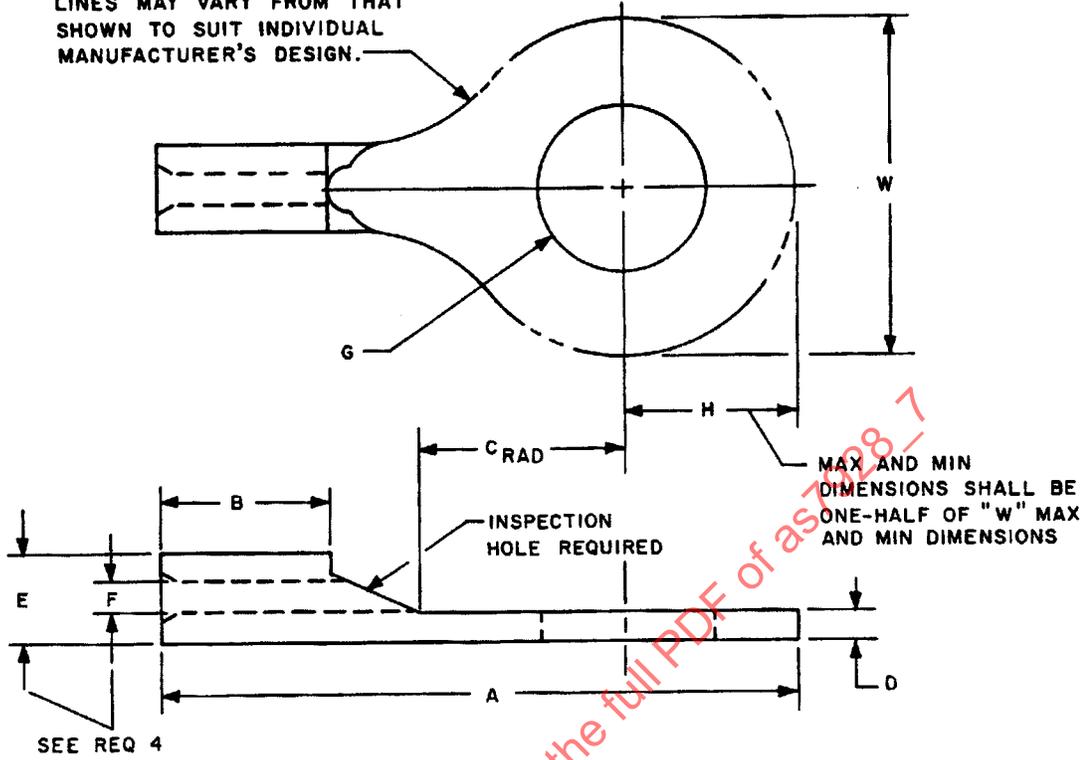

SAENORM.COM : Click to view the full PDF of as7928-7

AS7928/7

TABLE I

Dash No.	Wire Size	Stud Size	A Max.	B Min.	C Min. Rad.	D		E Dia.	F Dia.	G		W		MIL-T-16366 (SHIPS) Reference
						Max.	Min.			Max.	Min.	Max.	Min.	
-1		2 (.086)	.560	.115						.098	.090	.230	.198	1-2
-2		4 (.112)								.122	.114			
-3	22-18	6 (.138)	.747	.200				.165	.070	.152	.142	.320	.275	L33, 1-2
-4		10 (.190)	.747	.200				.110	.052	.203	.193	.320	.275	
-5		5/16 (.3125)	.953	.312						.338	.323	.540	.450	L36, 2-1/2-4
-6		3/8 (.375)	1.125	.380		.023				.400	.385	.609	.520	
-7		6 (.138)	.747	.200						.152	.142	.320	.275	L65, 2-1/2-4
-8		10 (.190)	.747	.200						.203	.193	.320	.275	
-9	16-14	5/16 (.3125)	.953	.312				.192	.098	.338	.323	.540	.450	L66, 2-1/2-4
-10		3/8 (.375)	1.125	.380				.139	.081	.400	.385	.609	.520	
-11		4 (.112)	.560	.115						.122	.114	.250	.240	2-1/2-4

AEROSPACE STANDARD

TERMINAL LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, COPPER,
TERMINAL LUG, CRIMP STYLE, COPPER, UNINSULATED, RING TONGUE
TYPE I, CLASS 1
FOR 175°C TOTAL CONDUCTOR TEMPERATURE

AS7928/7
SHEET 3 OF 5

REQUIREMENTS:

- MATERIAL: SOFT COPPER, QQ-C-502, CLASS A
COPPER TUBING, ASTM B75-68
GILDING METAL, 95 PERCENT COPPER, 5 PERCENT ZINC.
- FINISH: TIN PLATED. SEE ACQUISITION SPECIFICATION.
- QUALIFICATION TESTING: FOR QUALIFICATION, TERMINALS SHALL BE TESTED WITH ANY ONE OF THE FOLLOWING WIRES: MIL-W-22759/1, 9 OR 11 OR MIL-W-81381/1, 3 OR 7, AND TOOLING AS FOLLOWS: MIL-C-22520/24 HAND CRIMPING TOOL. MIL-C-915 AND MIL-C-2194 CABLES MAY BE USED WITH MIL-C-22520/25 OR MIL-C-22520/24 HAND CRIMPING TOOL.
- AVERAGE DIAMETER OF "E" AND "F" DIMENSIONS MUST BE WITHIN QUALIFICATION DIMENSIONS: MAX AND MIN. DIMENSIONS DUE TO OVALIZATION MUST BE WITHIN 3% OF SPECIFICATION REQUIREMENTS.
- WHERE SPLIT BARREL CONSTRUCTION IS USED, THE SPLIT SHALL BE PERMANENTLY SEALED AND SHALL NOT OPEN AS A RESULT OF CRIMPING.
- PART NUMBER. THE PART NUMBERS SHALL CONSIST OF THE LETTER "M", SPECIFICATION SHEET NUMBER, AND DASH NUMBER.

EXAMPLE OF PART NUMBER: M7928/7-2 TERMINAL TERMINAL FIT SIZE 22-18 WIRE WITH 0.190 STUD SIZE HOLE.

NOTES:

- DIMENSIONS IN INCHES.
- METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.

TABLE II (REF)

Size	Navy Cable Size
22-18	1 (1)
	1 (7)
	1 (10)
	1 - 1/2 (1)
	1 - 1/2 (7)
	1 - 1/2 (16)
	1 - 1/2 (41)
	2 (7)
16-14	2 - 1/2 (1)
	2 - 1/2 (19)
	2 - 1/2 (26)
	3 (7)
	4 (1)
	4 (19)
	4 (7)
	4 (41)