


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. A	AS9025			FEDERAL SUPPLY CLASS 5340
	RATIONALE AS9025 WAS ISSUED AS A REPLACEMENT FOR U.S. MILITARY STANDARD MS9025. THE PREPARING ACTIVITY: NAVY-AS WILL CONTINUE TO MAINTAIN STANDARD MS9025; THEREFORE, THE CONTINUANCE OF AS9025 IS NO LONGER APPROPRIATE. CANCELLATION NOTICE THIS DOCUMENT HAS BEEN DECLARED "CANCELLED" AS OF JULY 2007. BY THIS ACTION, THIS DOCUMENT WILL REMAIN LISTED IN THE NUMERICAL SECTION OF THE AEROSPACE STANDARDS INDEX.			
SAENORM.COM : Click to view the full PDF of as9025a				
CUSTODIAN: SAE E-25		THIRD ANGLE PROJECTION 		
		AEROSPACE STANDARD CLAMP - LOOP TYPE SUPPORT (HEAT RESISTANT) .265 HOLE		AS9025
				REV. A

ISSUED 1999-08 REAFFIRMED 2004-07 CANCELLED 2007-07

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org


SAE WEB ADDRESS: <http://www.sae.org>

SAENORM.COM : Click to view the full PDF of as9025a

REV.
A

AS9025

FEDERAL SUPPLY CLASS
5340

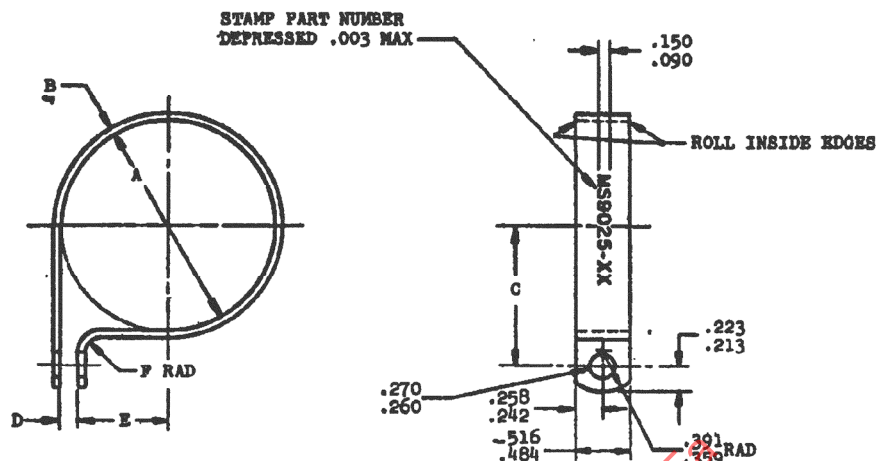

PART NO.	FIIN	NOM TUBE OD	A DIA BASIC	B ±.005	C ±.010	D	E REF	F RAD ±.016	APPROX WEIGHT LBS. EA.
MS9025-01		.125	.125	.031	.360	.062-.078	0	.062	.0055
MS9025-02		.188	.188	.031	.423	.062-.078	.031	.062	.0066
MS9025-03		.250	.250	.031	.457	.062-.078	.062	.062	.0075
MS9025-04		.312	.312	.031	.498	.062-.078	.094	.062	.0085
MS9025-05		.375	.375	.031	.529	.062-.078	.125	.062	.0094
MS9025-06		.438	.438	.031	.560	.062-.078	.156	.062	.0103
MS9025-07		.500	.500	.031	.592	.062-.078	.188	.062	.0112
MS9025-08		.562	.562	.031	.623	.062-.078	.219	.062	.0122
MS9025-09		.625	.625	.031	.654	.062-.078	.250	.062	.0131
MS9025-10		.688	.688	.051	.752	.062-.078	.281	.109	.0237
MS9025-11		.750	.750	.051	.783	.062-.078	.312	.109	.0252
MS9025-12		.812	.812	.051	.814	.062-.078	.344	.109	.0267
MS9025-13		.875	.875	.051	.845	.062-.078	.375	.109	.0283
MS9025-14		.938	.938	.051	.877	.062-.078	.406	.109	.0298
MS9025-15		1.000	1.000	.051	.908	.062-.078	.438	.109	.0313
MS9025-16		1.062	1.062	.051	.939	.062-.078	.469	.109	.0331
MS9025-17		1.125	1.125	.051	.970	.062-.078	.500	.109	.0343
MS9025-18		1.188	1.188	.051	1.002	.062-.078	.531	.109	.0359
MS9025-19		1.250	1.250	.064	1.062	.094-.110	.531	.125	.0471
MS9025-20		1.312	1.312	.064	1.093	.094-.110	.562	.125	.0490
MS9025-21		1.375	1.375	.064	1.125	.094-.110	.594	.125	.0509
MS9025-22		1.438	1.438	.064	1.156	.094-.110	.625	.125	.0528
MS9025-23		1.500	1.500	.064	1.188	.094-.110	.656	.125	.0547
MS9025-24		1.562	1.562	.064	1.219	.094-.110	.688	.125	.0566
MS9025-25		1.625	1.625	.064	1.250	.094-.110	.719	.125	.0585
MS9025-26		1.750	1.750	.064	1.312	.094-.125	.781	.125	.0623
MS9025-27		1.875	1.875	.064	1.375	.094-.125	.844	.125	.0661
MS9025-28		2.000	2.000	.064	1.438	.094-.125	.906	.125	.0696

CUSTODIAN: SAE E-25

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CLAMP - LOOP TYPE SUPPORT
(HEAT RESISTANT)
.265 HOLE

AS9025
SHEET 1 OF 2

**REV.
A**